

# Neon light

Led NEON Light 5MRoll



## PERFORMANCE DATA

**Efficacy :** 1000 Lm/M

**Input Voltage :** 12-24 VDC

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Silicone Extrusion - UV Resistant

**Mounting :** Recessed - Surface


**Lens :** Silicon

**Finish :** White

**Protection Class :** IP 67

**Mechanical Resistance :** IK 08

## OPTICS

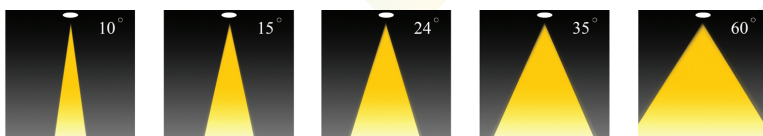

| Code         | Power<br>W | Efficacy<br>Lm/M | Colour Temp.<br>K | Dimensions<br>Length / Roll | Driver   | LED Chip | Weight |
|--------------|------------|------------------|-------------------|-----------------------------|----------|----------|--------|
| NEOLED010W/M | 10         | 1000             | 3000              | L5000×160×160mm             | Meanweel | Osram    |        |



## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K


CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

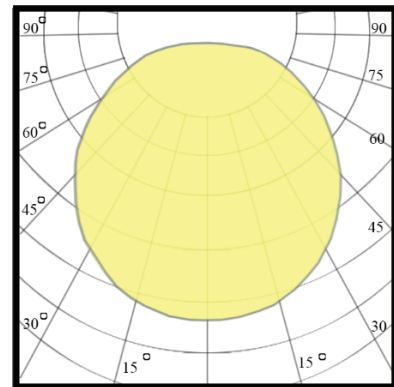

# Neon light

Led NEON Light 5MRoll



## PERFORMANCE DATA

**Efficacy :** 50-60 Lm/M

**Input Voltage :** 12-24 VDC

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Silicone Extrusion - UV Resistant

**Mounting :** Recessed - Surface

**Lens :** Silicon


**Finish :** White

**Protection Class :** IP 67

**Mechanical Resistance :** IK 08



## OPTICS

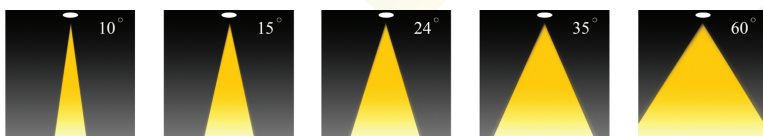

| Code         | Power<br>W | Efficacy<br>Lm/M | Colour Temp.<br>K | Dimensions<br>Length / Roll | Driver   | LED Chip | Weight |
|--------------|------------|------------------|-------------------|-----------------------------|----------|----------|--------|
| NEOLED012W/M | 12         | 50-60            | 3000              | L5000×160×160mm             | Meanweel | Osram    |        |



## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K


CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

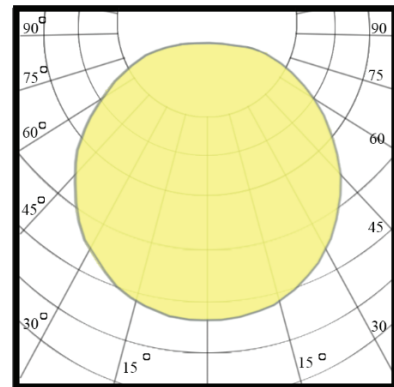

# Neon light

Led NEON Light 5MRoll



## PERFORMANCE DATA

**Efficacy :** 1400 Lm/M

**Input Voltage :** 12-24 VDC

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Silicone Extrusion - UV Resistant

**Mounting :** Recessed - Surface

**Lens :** Silicon


**Finish :** White

**Protection Class :** IP 67

**Mechanical Resistance :** IK 08



## OPTICS

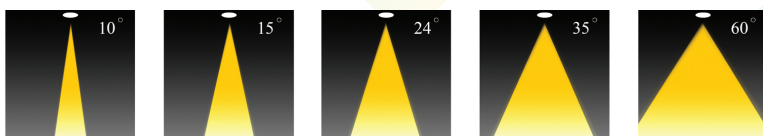

| Code         | Power<br>W | Efficacy<br>Lm/M | Colour Temp.<br>K | Dimensions<br>Length / Roll | Driver   | LED Chip | Weight |
|--------------|------------|------------------|-------------------|-----------------------------|----------|----------|--------|
| NEOLED014W/M | 14         | 1400             | 3000              | L5000×160×160mm             | Meanweel | Osram    |        |



## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K


CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

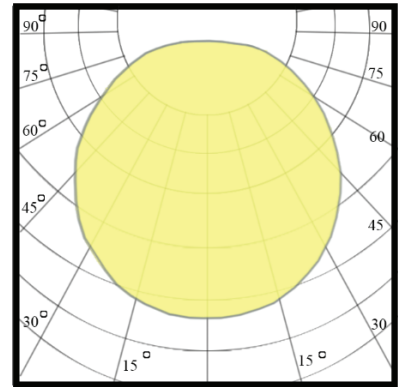

# Neon light

Led NEON Light 5MRoll



## PERFORMANCE DATA

**Efficacy :** 1400 Lm/M

**Input Voltage :** 12-24 VAC

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Silicone Extrusion - UV Resistant

**Mounting :** Recessed - Surface

**Lens :** Silicon


**Finish :** White

**Protection Class :** IP 67

**Mechanical Resistance :** IK 08



## OPTICS

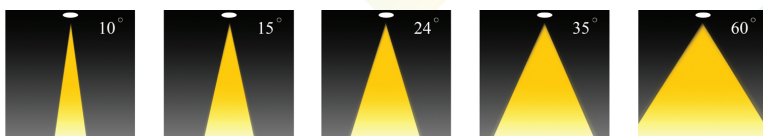

| Code            | Power<br>W | Efficacy<br>Lm/M | Colour Temp.<br>K | Dimensions<br>Length / Roll | Driver | LED Chip | Weight |
|-----------------|------------|------------------|-------------------|-----------------------------|--------|----------|--------|
| NEOLED014W/M-AC | 14         | 1400             | 3000              | L5000×160×160mm             | AC     | Osram    |        |



## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

