

linear Aluminum profile

SLT-1120



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : suspended,surface

Lens : Polycarbonate


Finish : Black

Protection Class : IP 40-54


Mechanical Resistance : IK 03



OPTICS

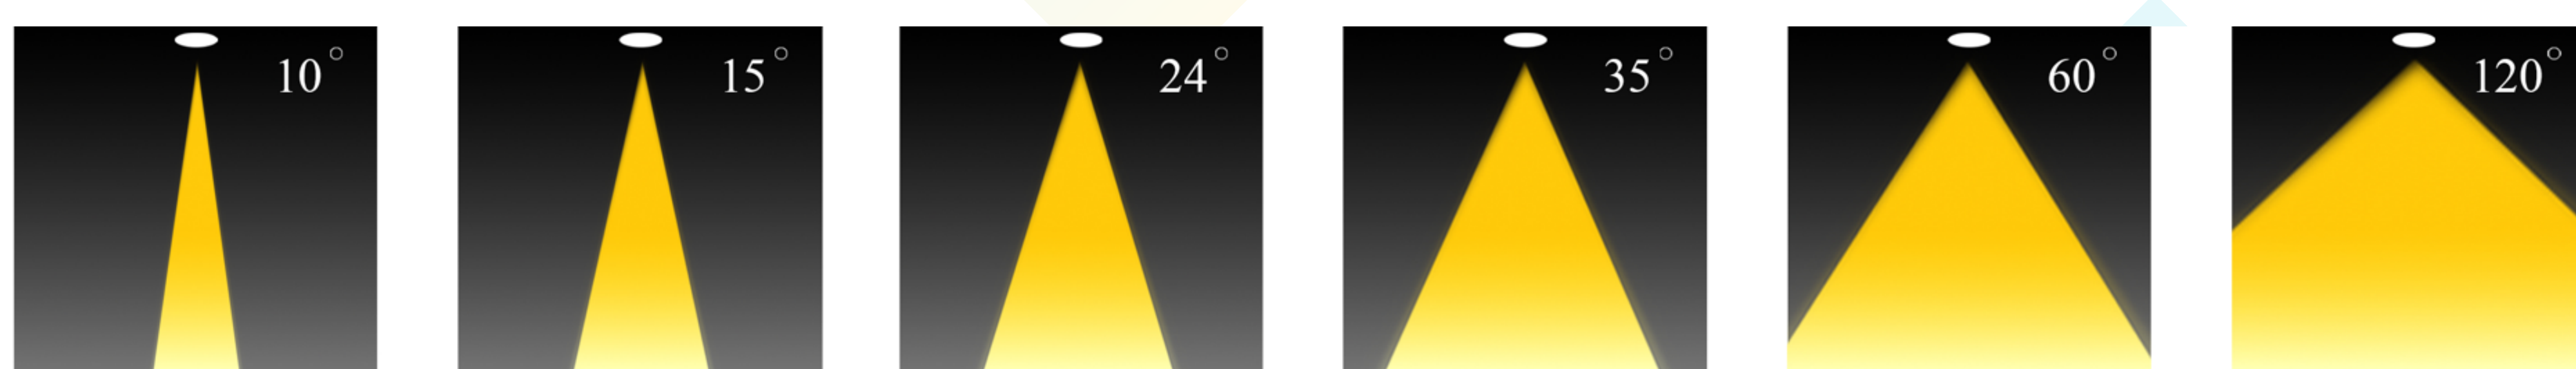

| Code | Power W | Efficacy Lm/W | Colour Temp. K | Dimensions AxBxC mm | Driver | LED Chip | Weight |
|-----------------|------------|------------------|----------------------|------------------------|------------------|----------|--------|
| 167XXX8120OX036 | 36 | 130 | 3000 4000 6500 | 1200x50x70 mm | Tridonic Done | Osram | |

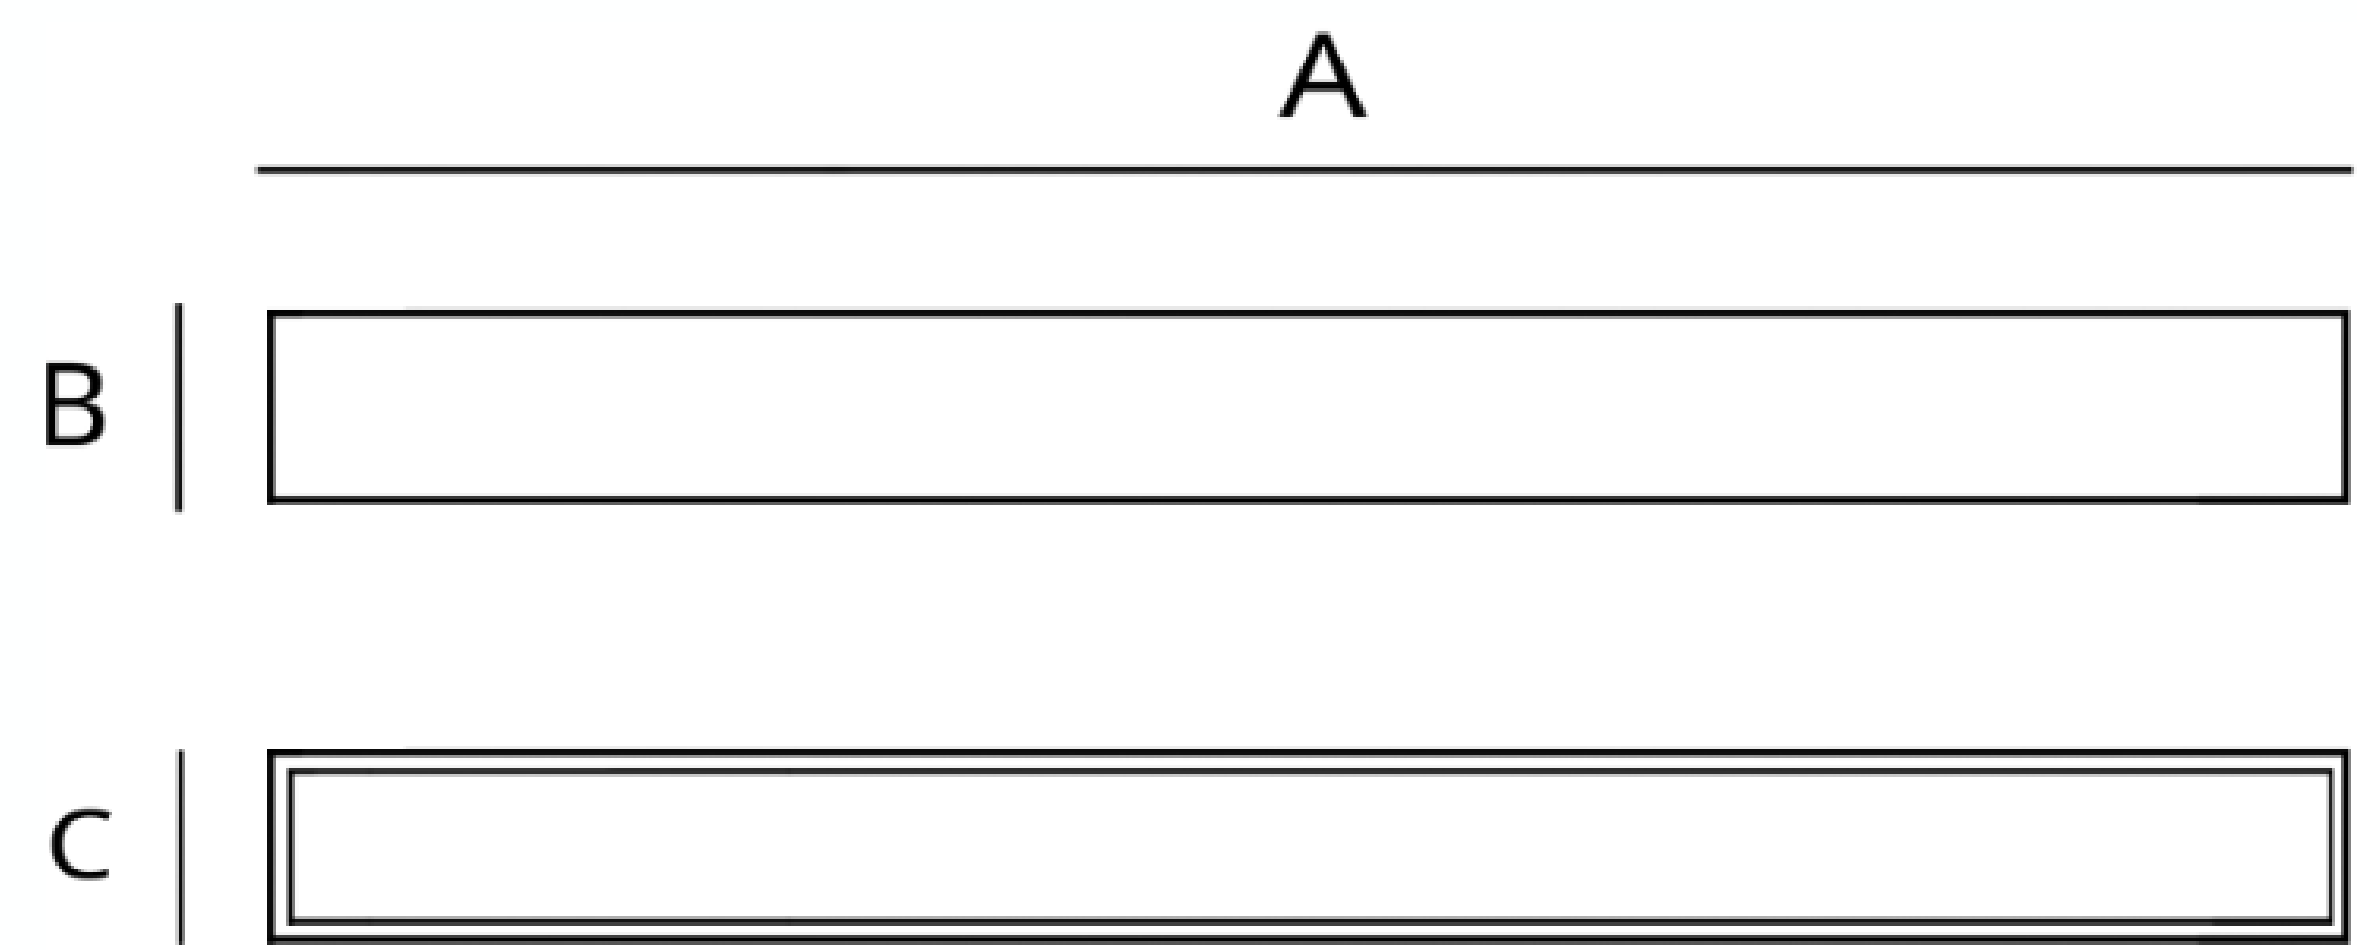

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

White
Gray

DALI

POLAR CURVE

