

# Projector

SLT-1127 - E27



## PERFORMANCE DATA

**Efficacy :** 90 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50Hz

**Color Rendering :** CRI

**Color Temperature :** 3000K

**Life Time :** 15,000 hrs

**Optic :** 120 °

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum and extruded Aluminum body


**Mounting :** Surface Wall light

**Lens :** Clear Glass


**Finish :** Gray RAL 7016

**Protection Class :** IP 65

**Mechanical resistance :** IK 08

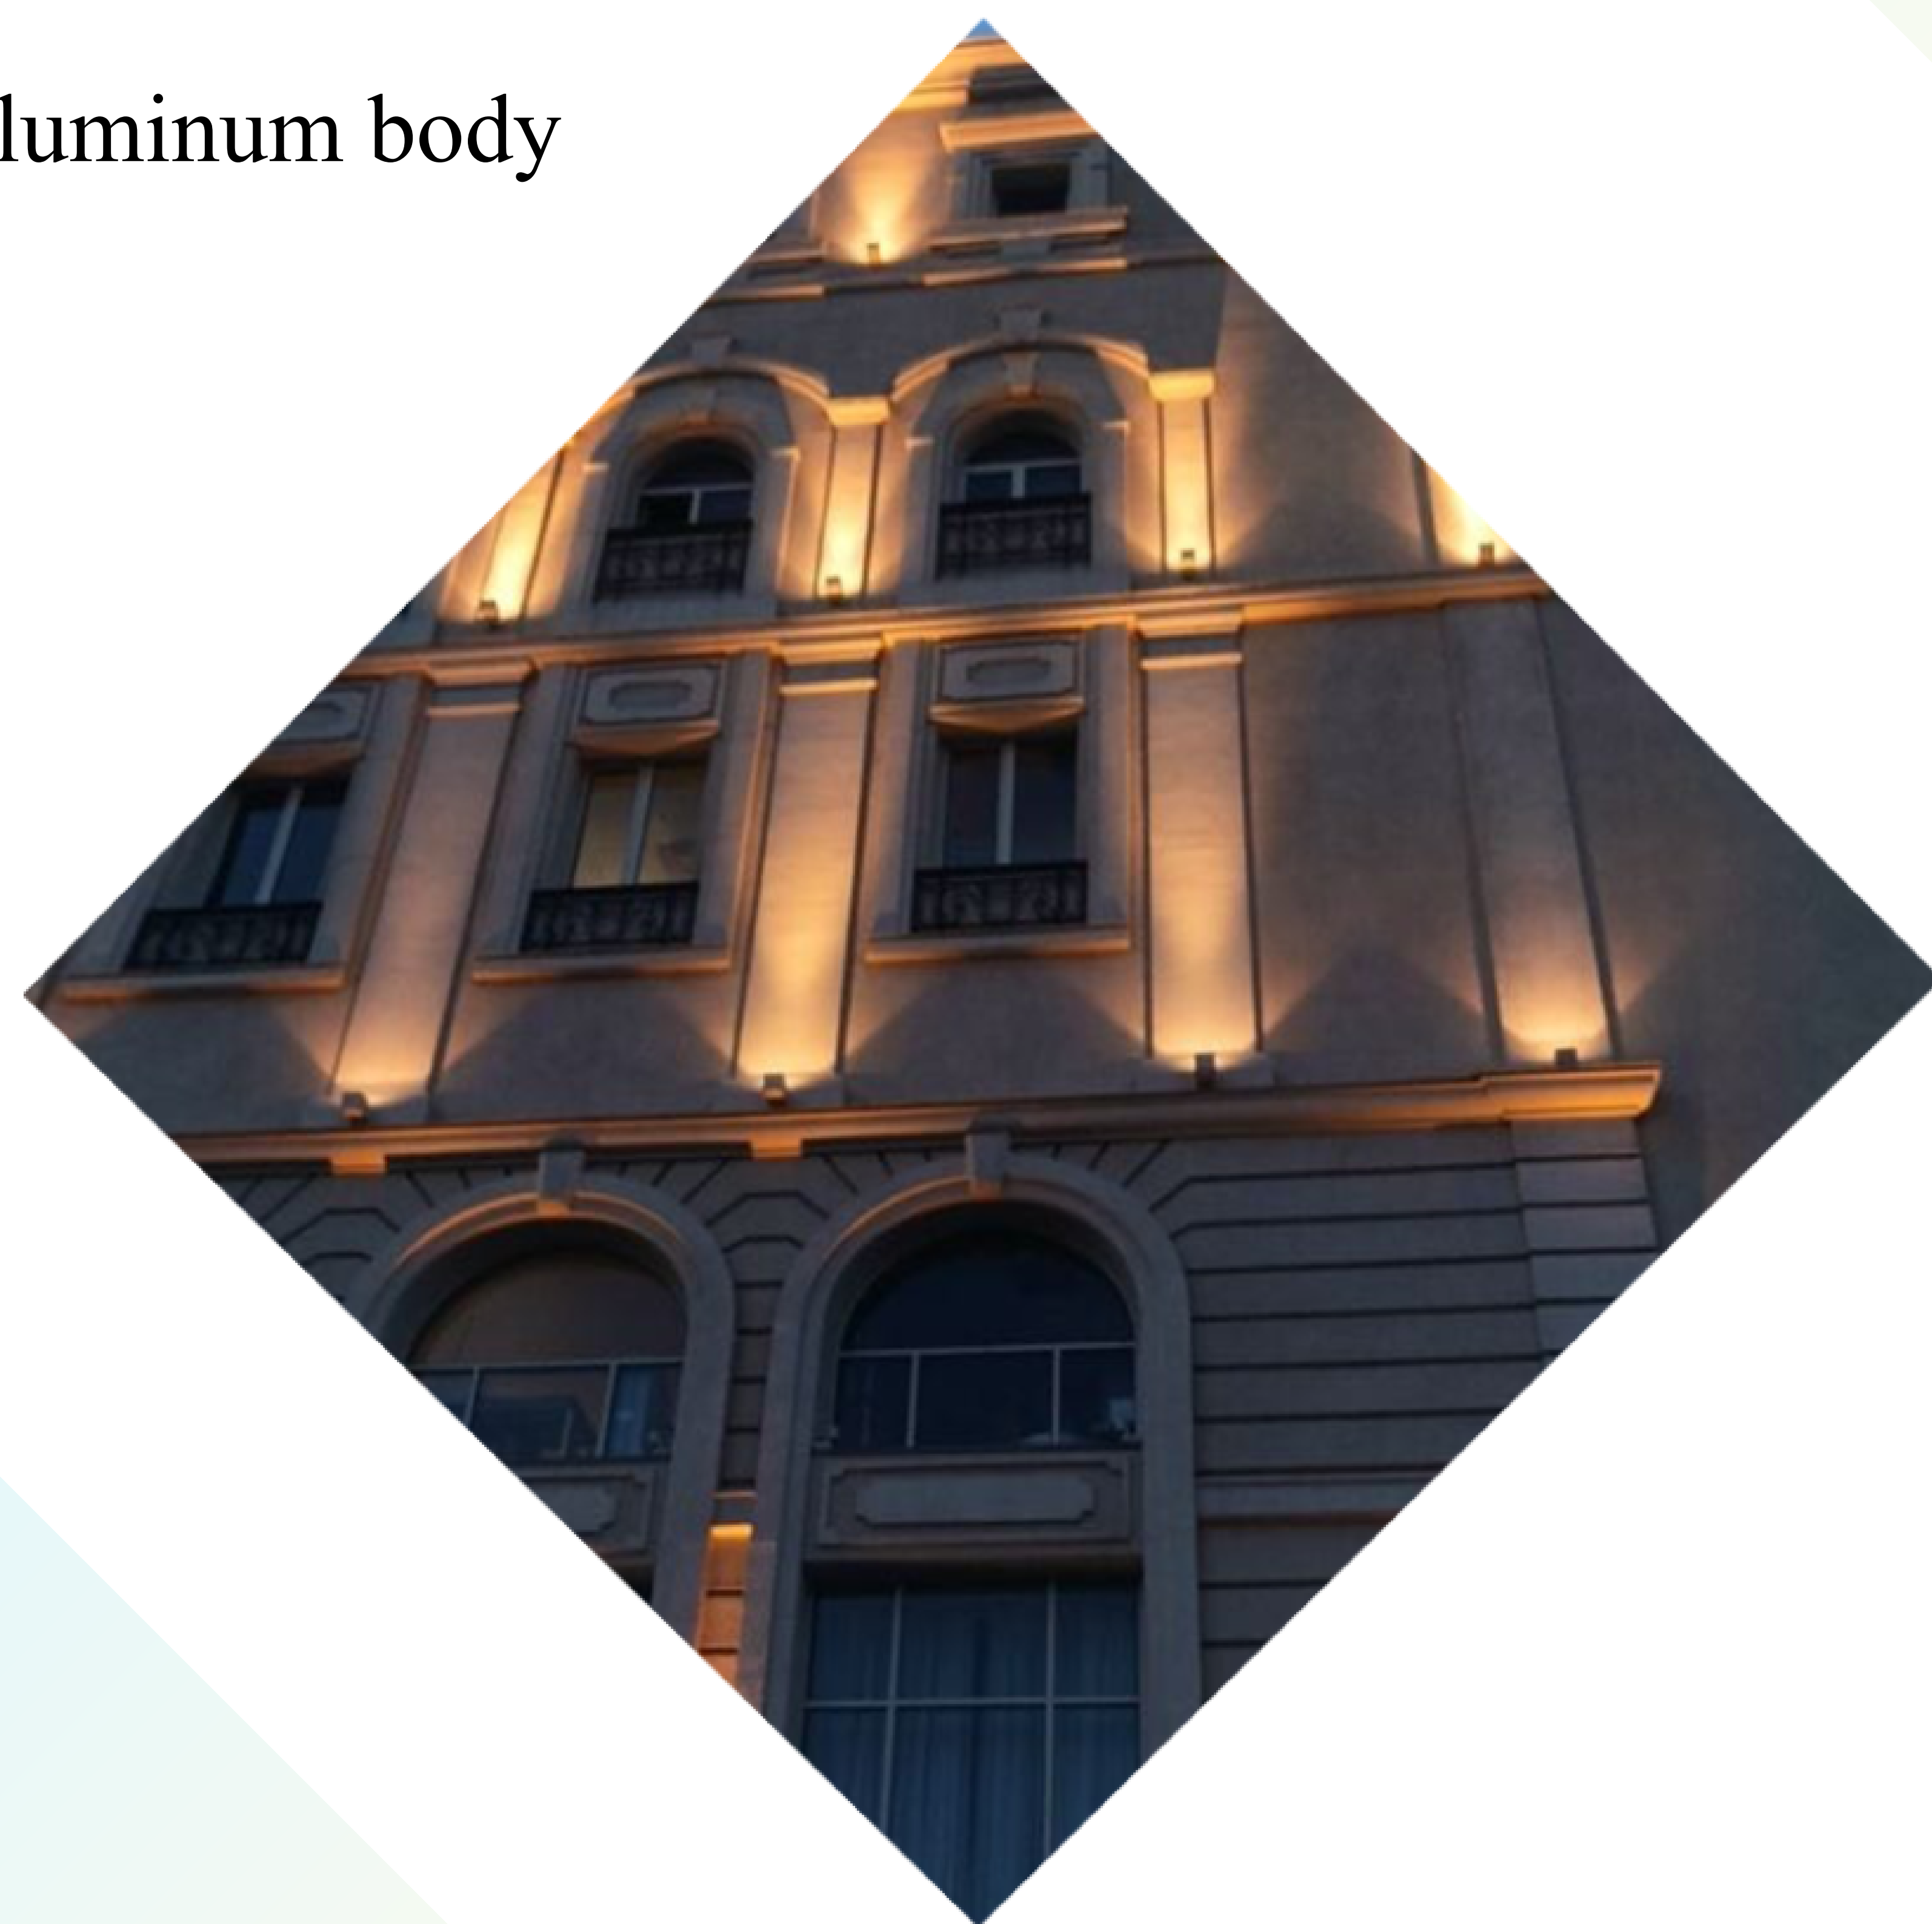


## OPTICS

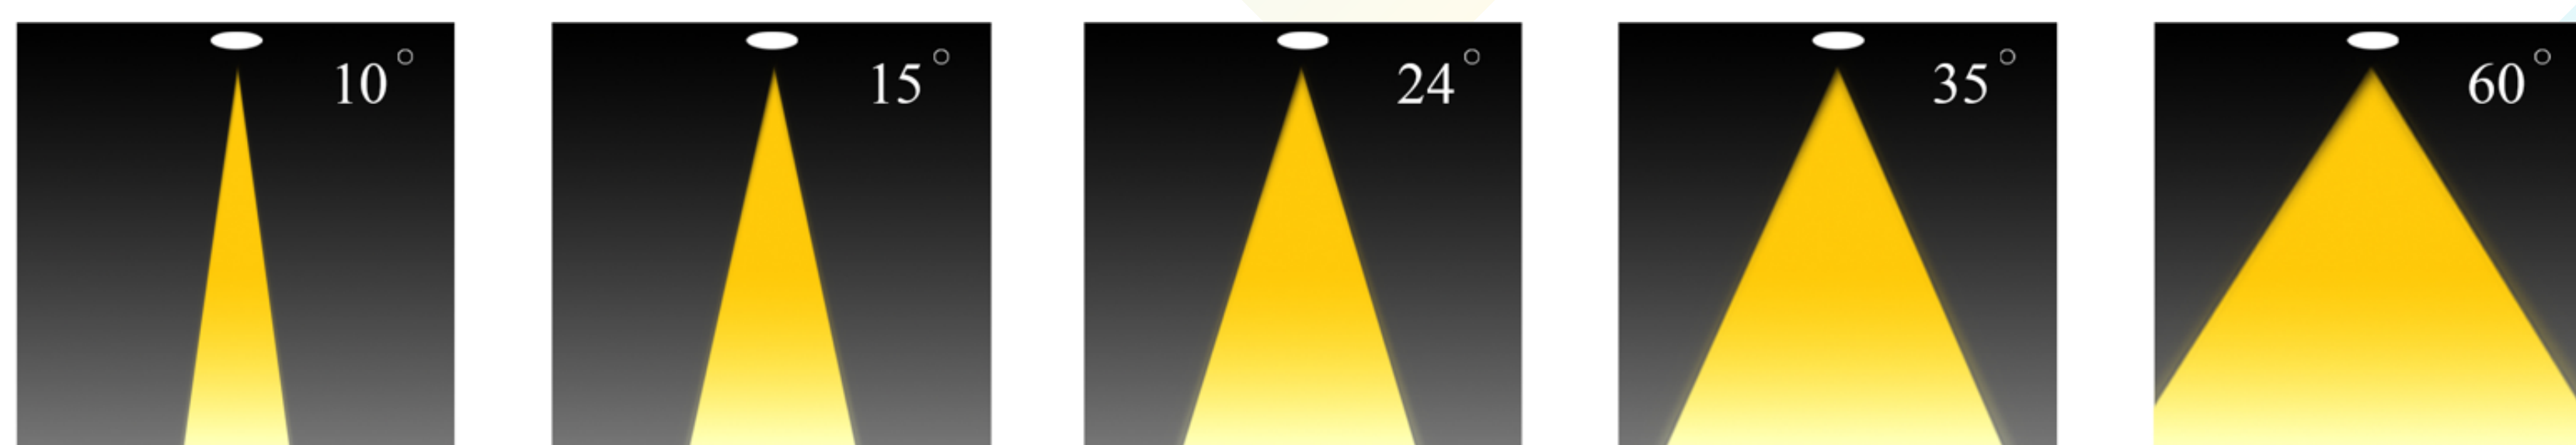



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	Lamp Base	Weight Kg
11273E27	9 12 15	90	3000 4000 6000	120x190x217 mm	N/A	E27	1.110

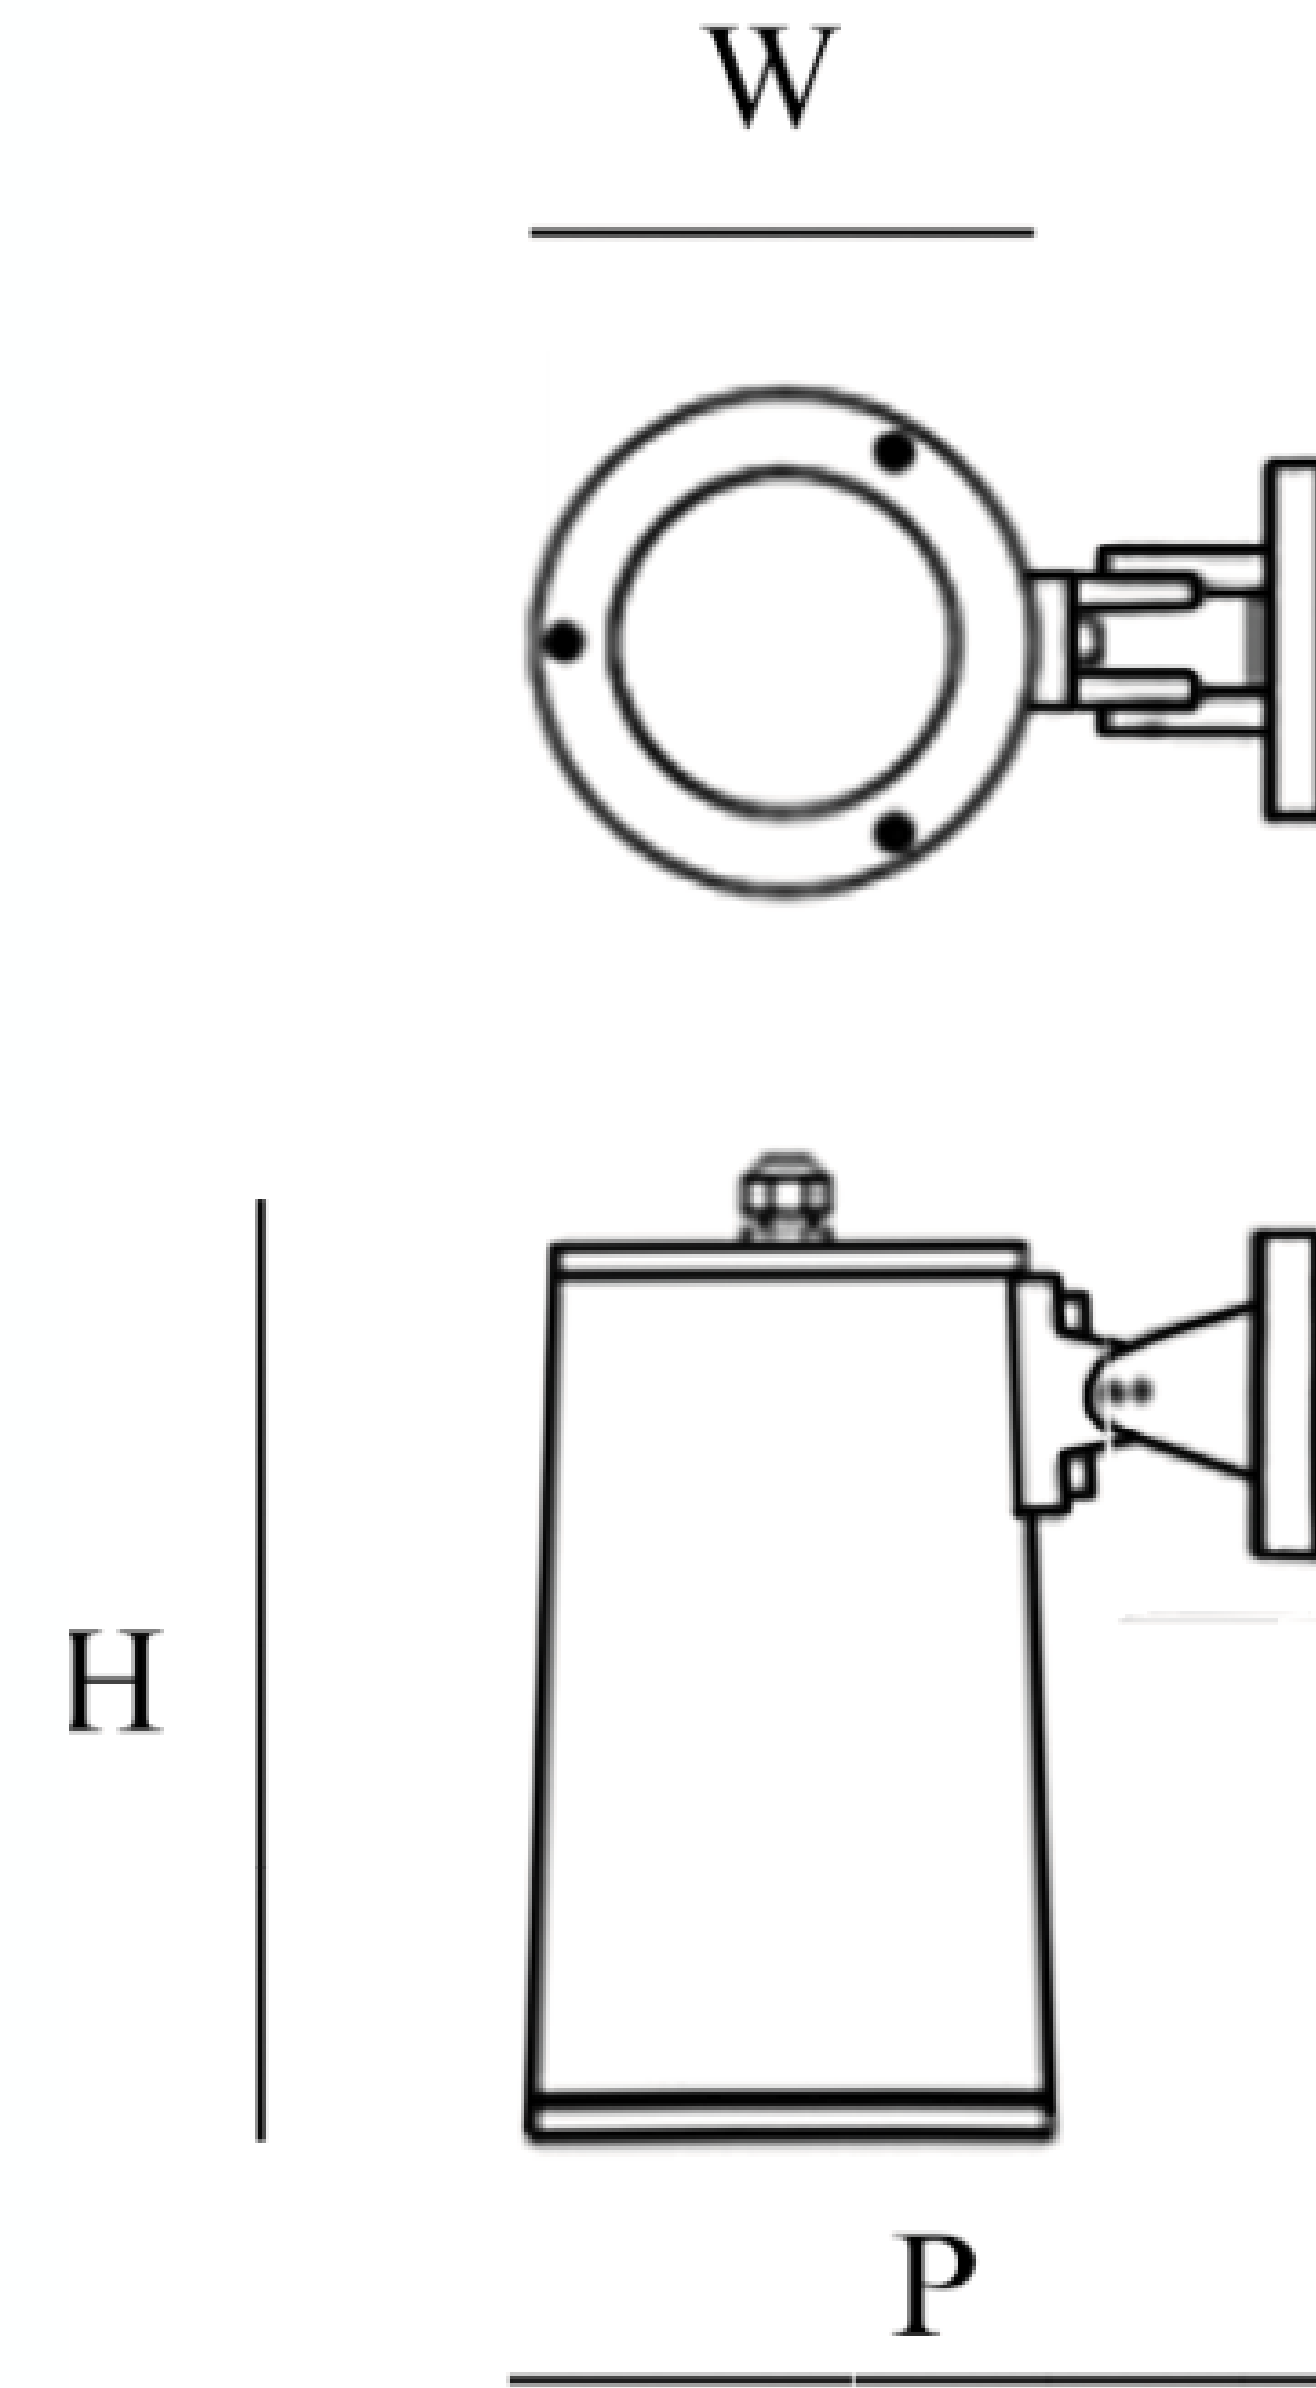

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

IK10

## POLAR CURVE

