

# Projector

SLT-1128



## PERFORMANCE DATA

**Efficacy :** 79.8 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50,000 hrs

**Optic :** 24°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum and extruded Aluminum body


**Mounting :** Surface Wall light

**Lens :** Clear glass


**Finish :** Black

**Protection Class :** IP 65

**Mechanical resistance :** IK 08

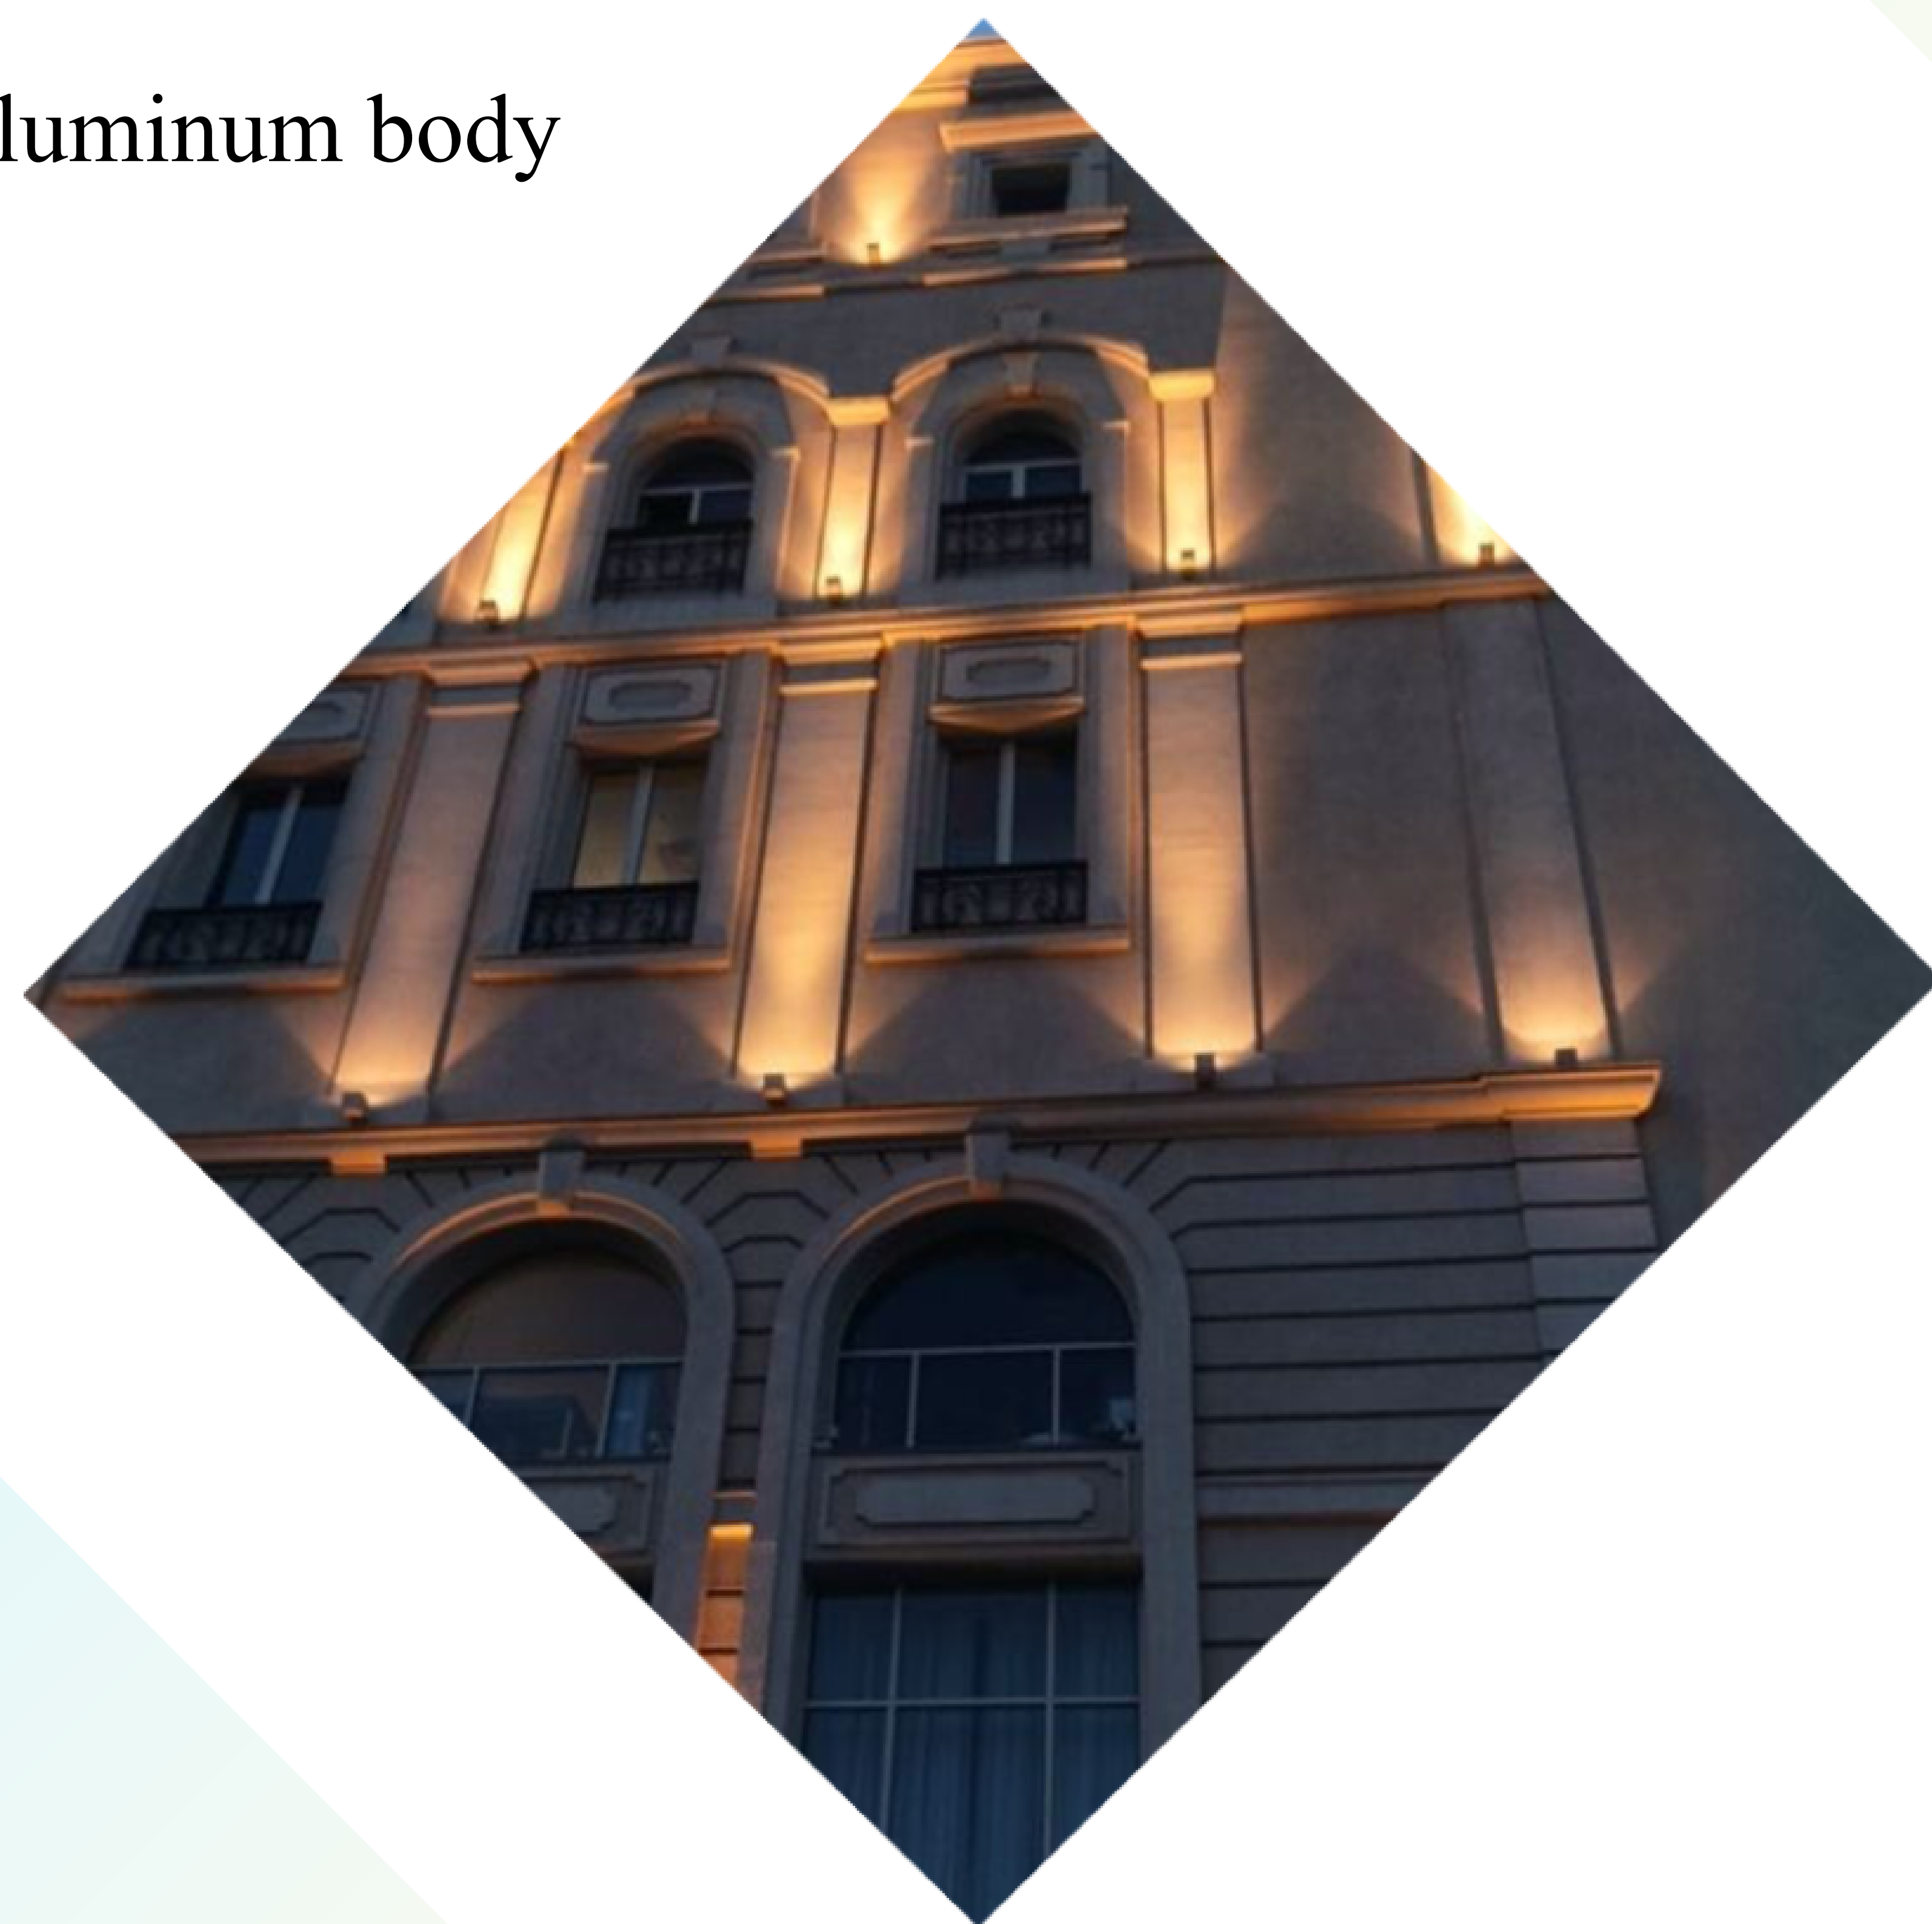


## OPTICS

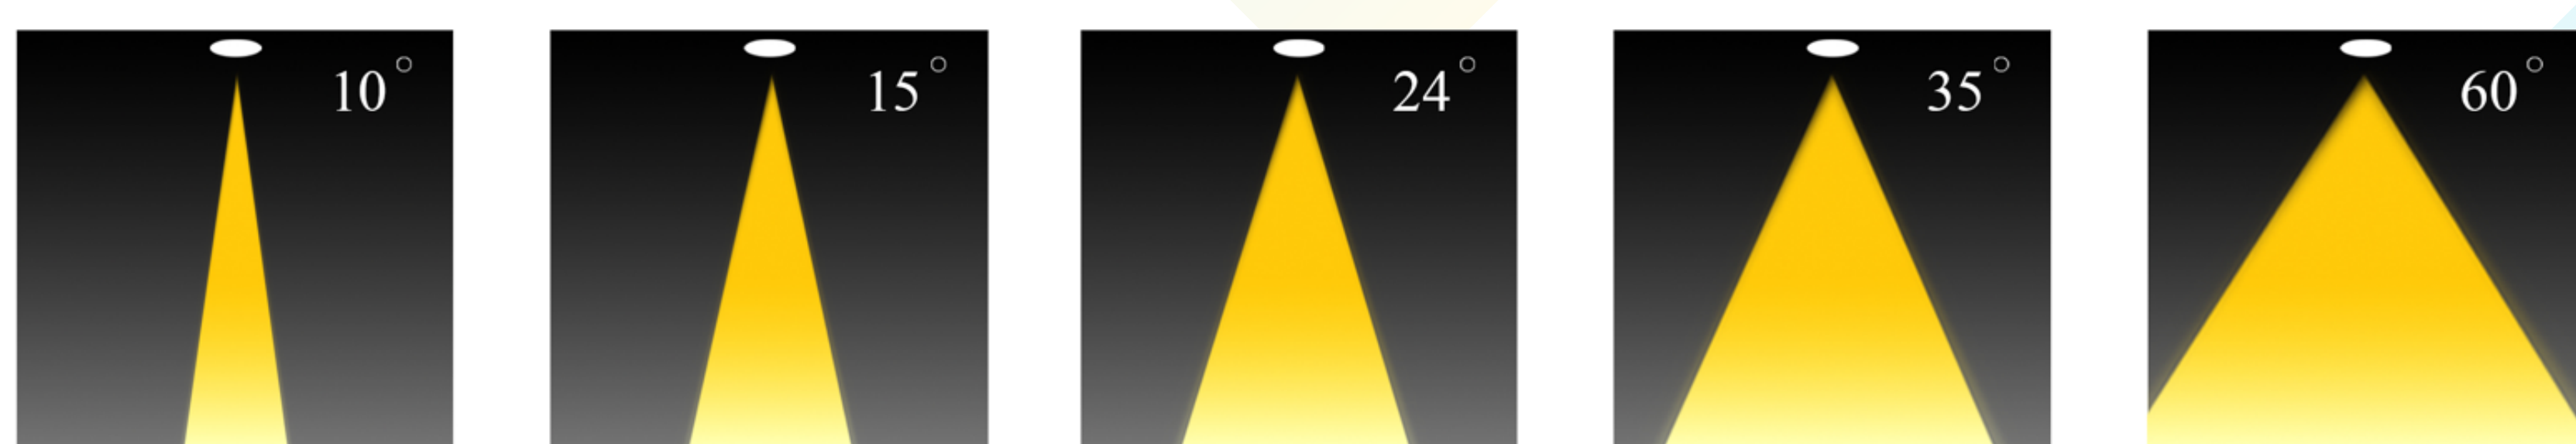



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
1128330X024CD015	15	79.8	3000	120x190x217 mm	Done	Cree	1.405

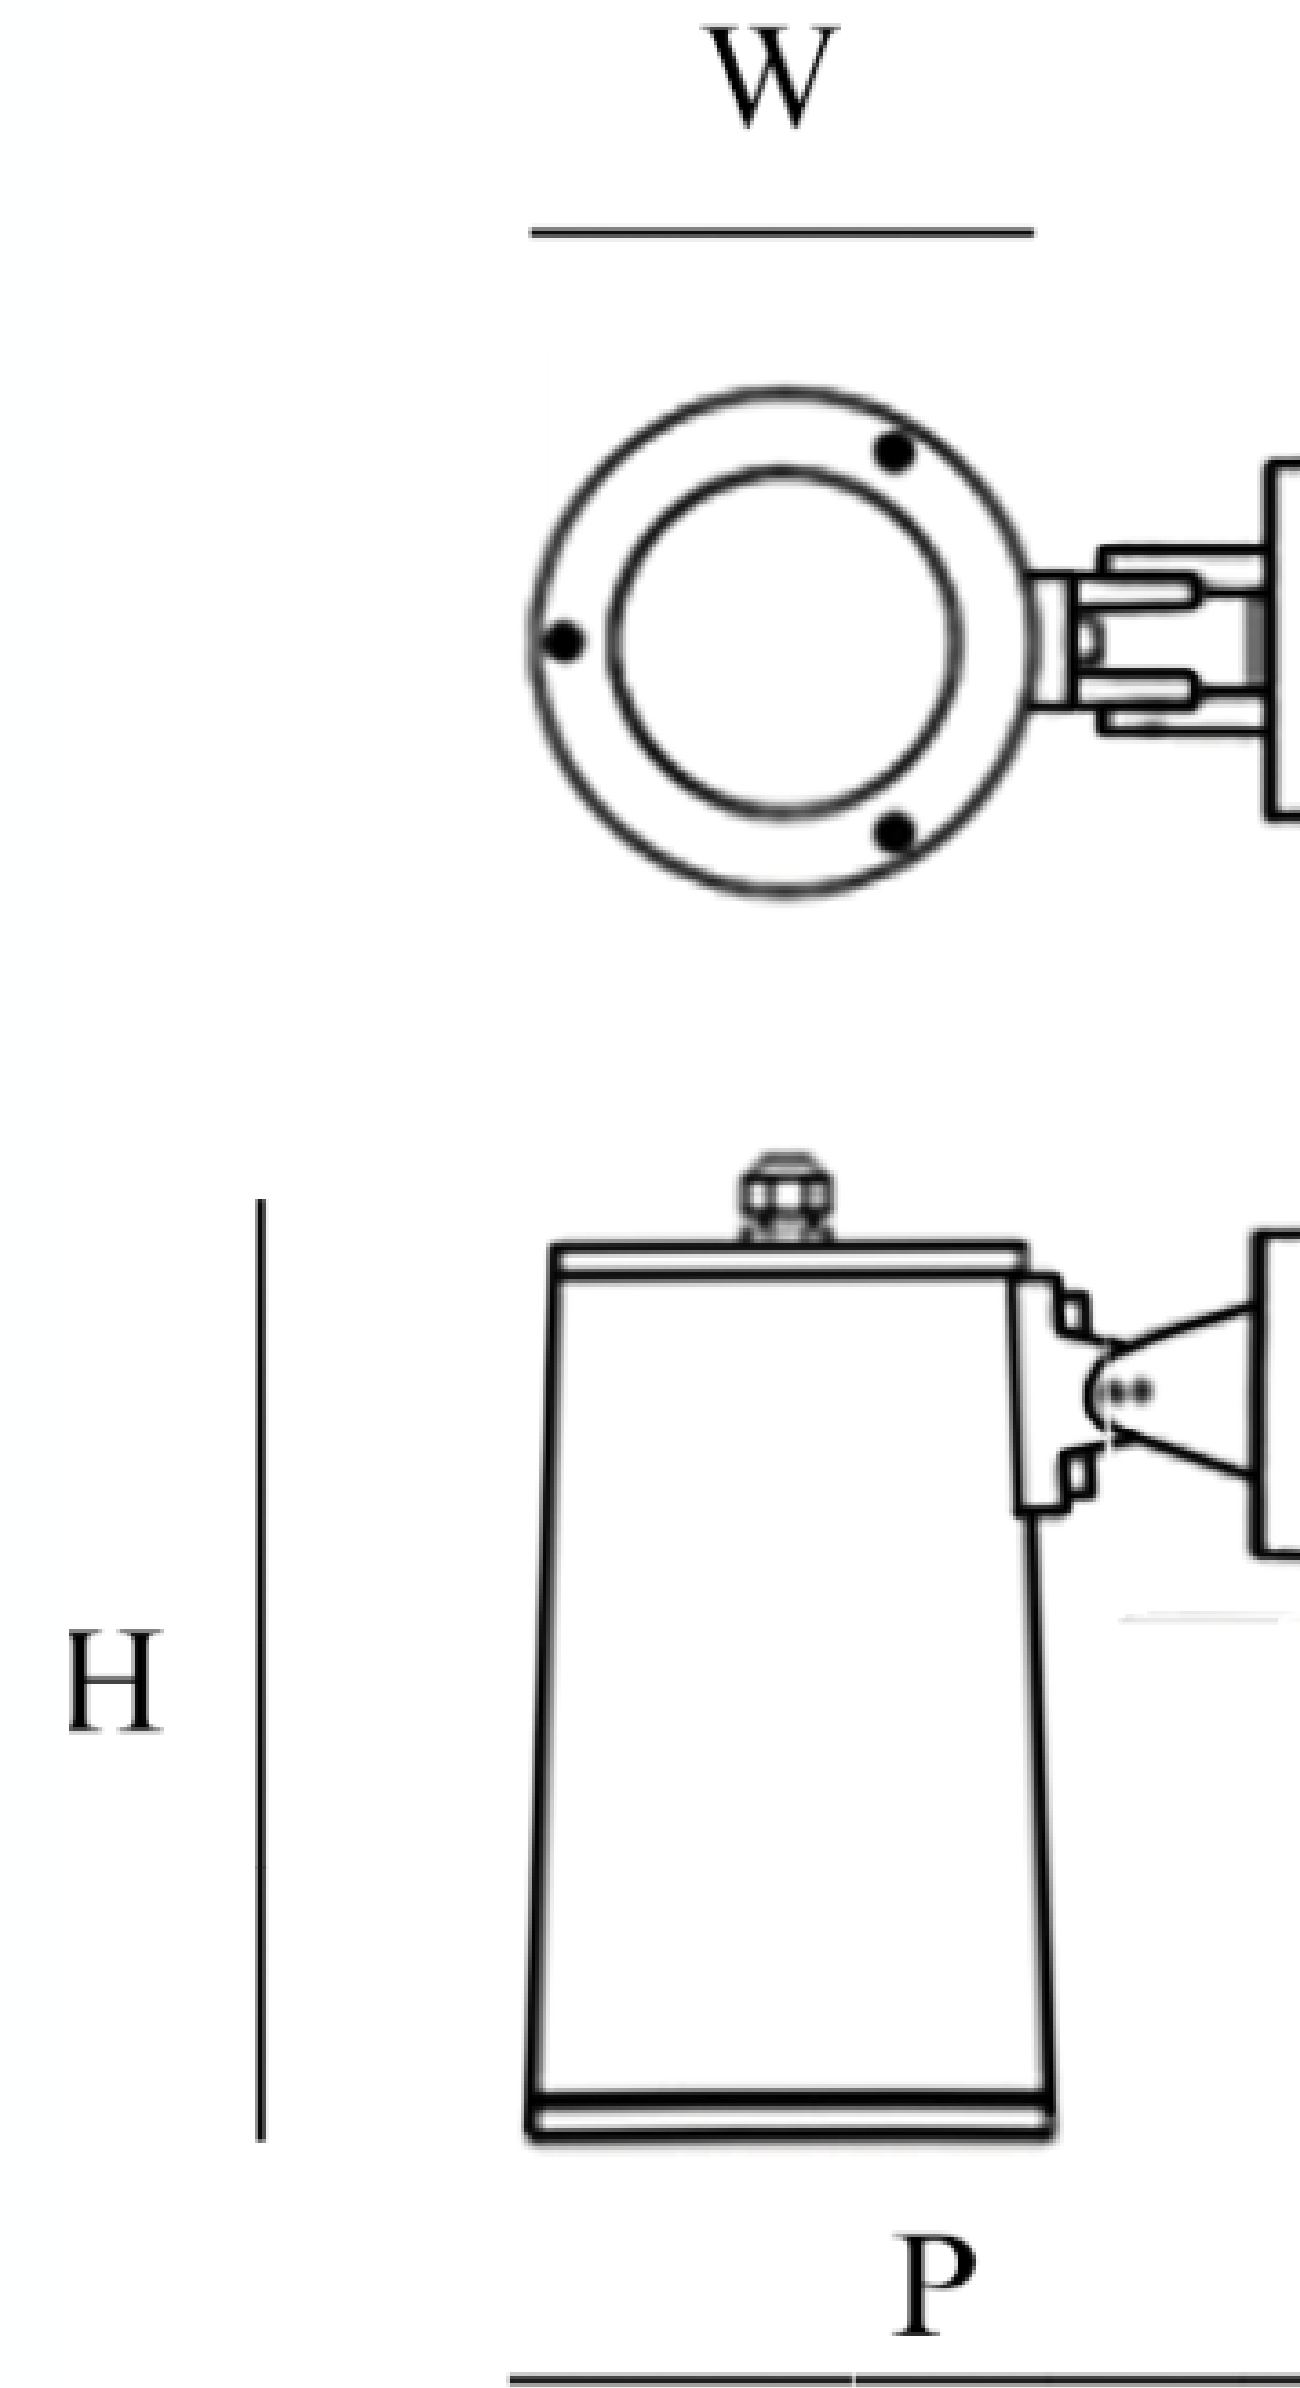

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

