

# Wall Decortive

SLT-1130



## PERFORMANCE DATA

**Efficacy :** 79.8Lm/W **Input**

**Voltage :** 110-240V

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50,000 hrs

**Optic :** 36°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum and extruded Aluminum body

**Mounting :** Surface mounted

**Lens :** Clear glass


**Finish :** Black

**Protection Class :** IP 65


**Mechanical resistance :** IK 08



## OPTICS

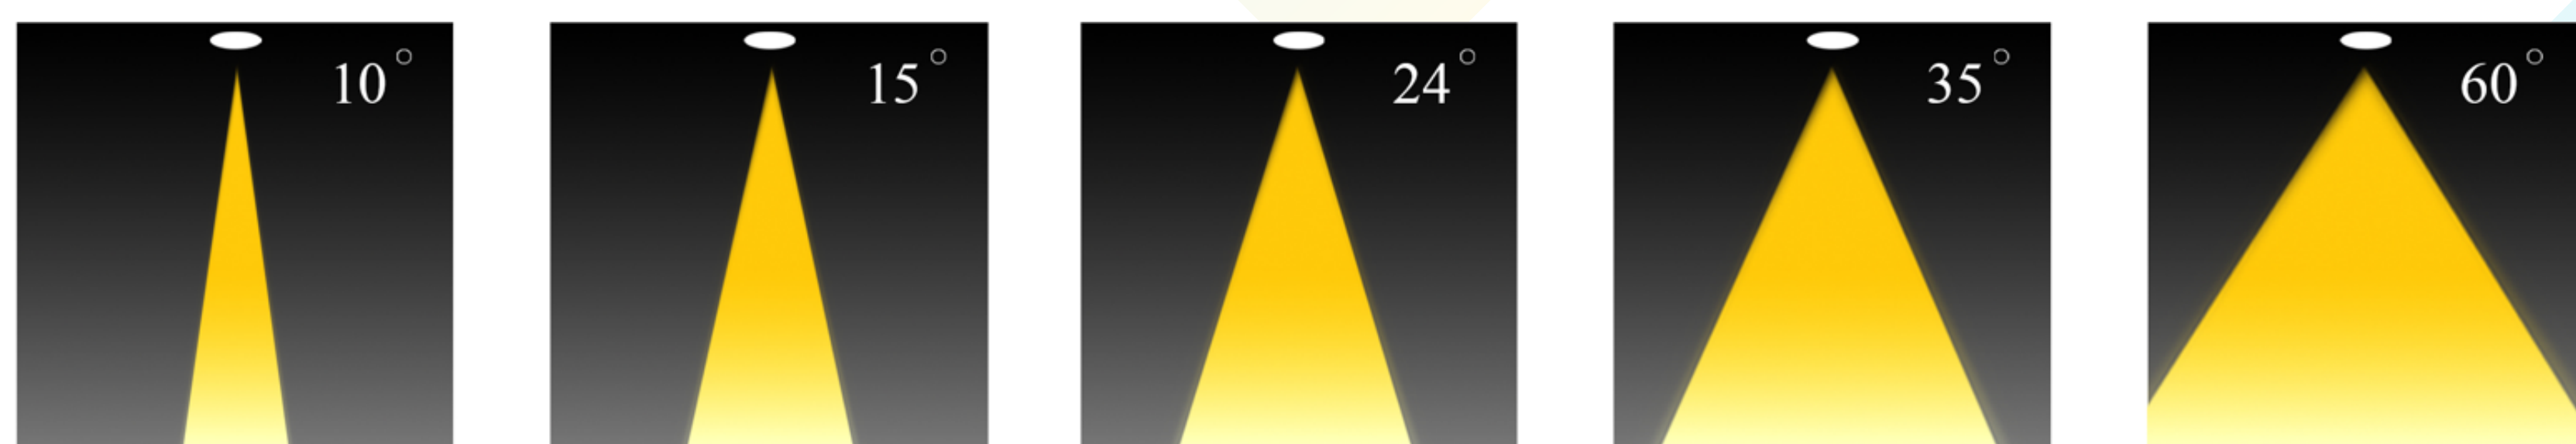

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
1130330X036CD015	15	79.8	3000	110x157x218 mm	Done	Cree	1.500

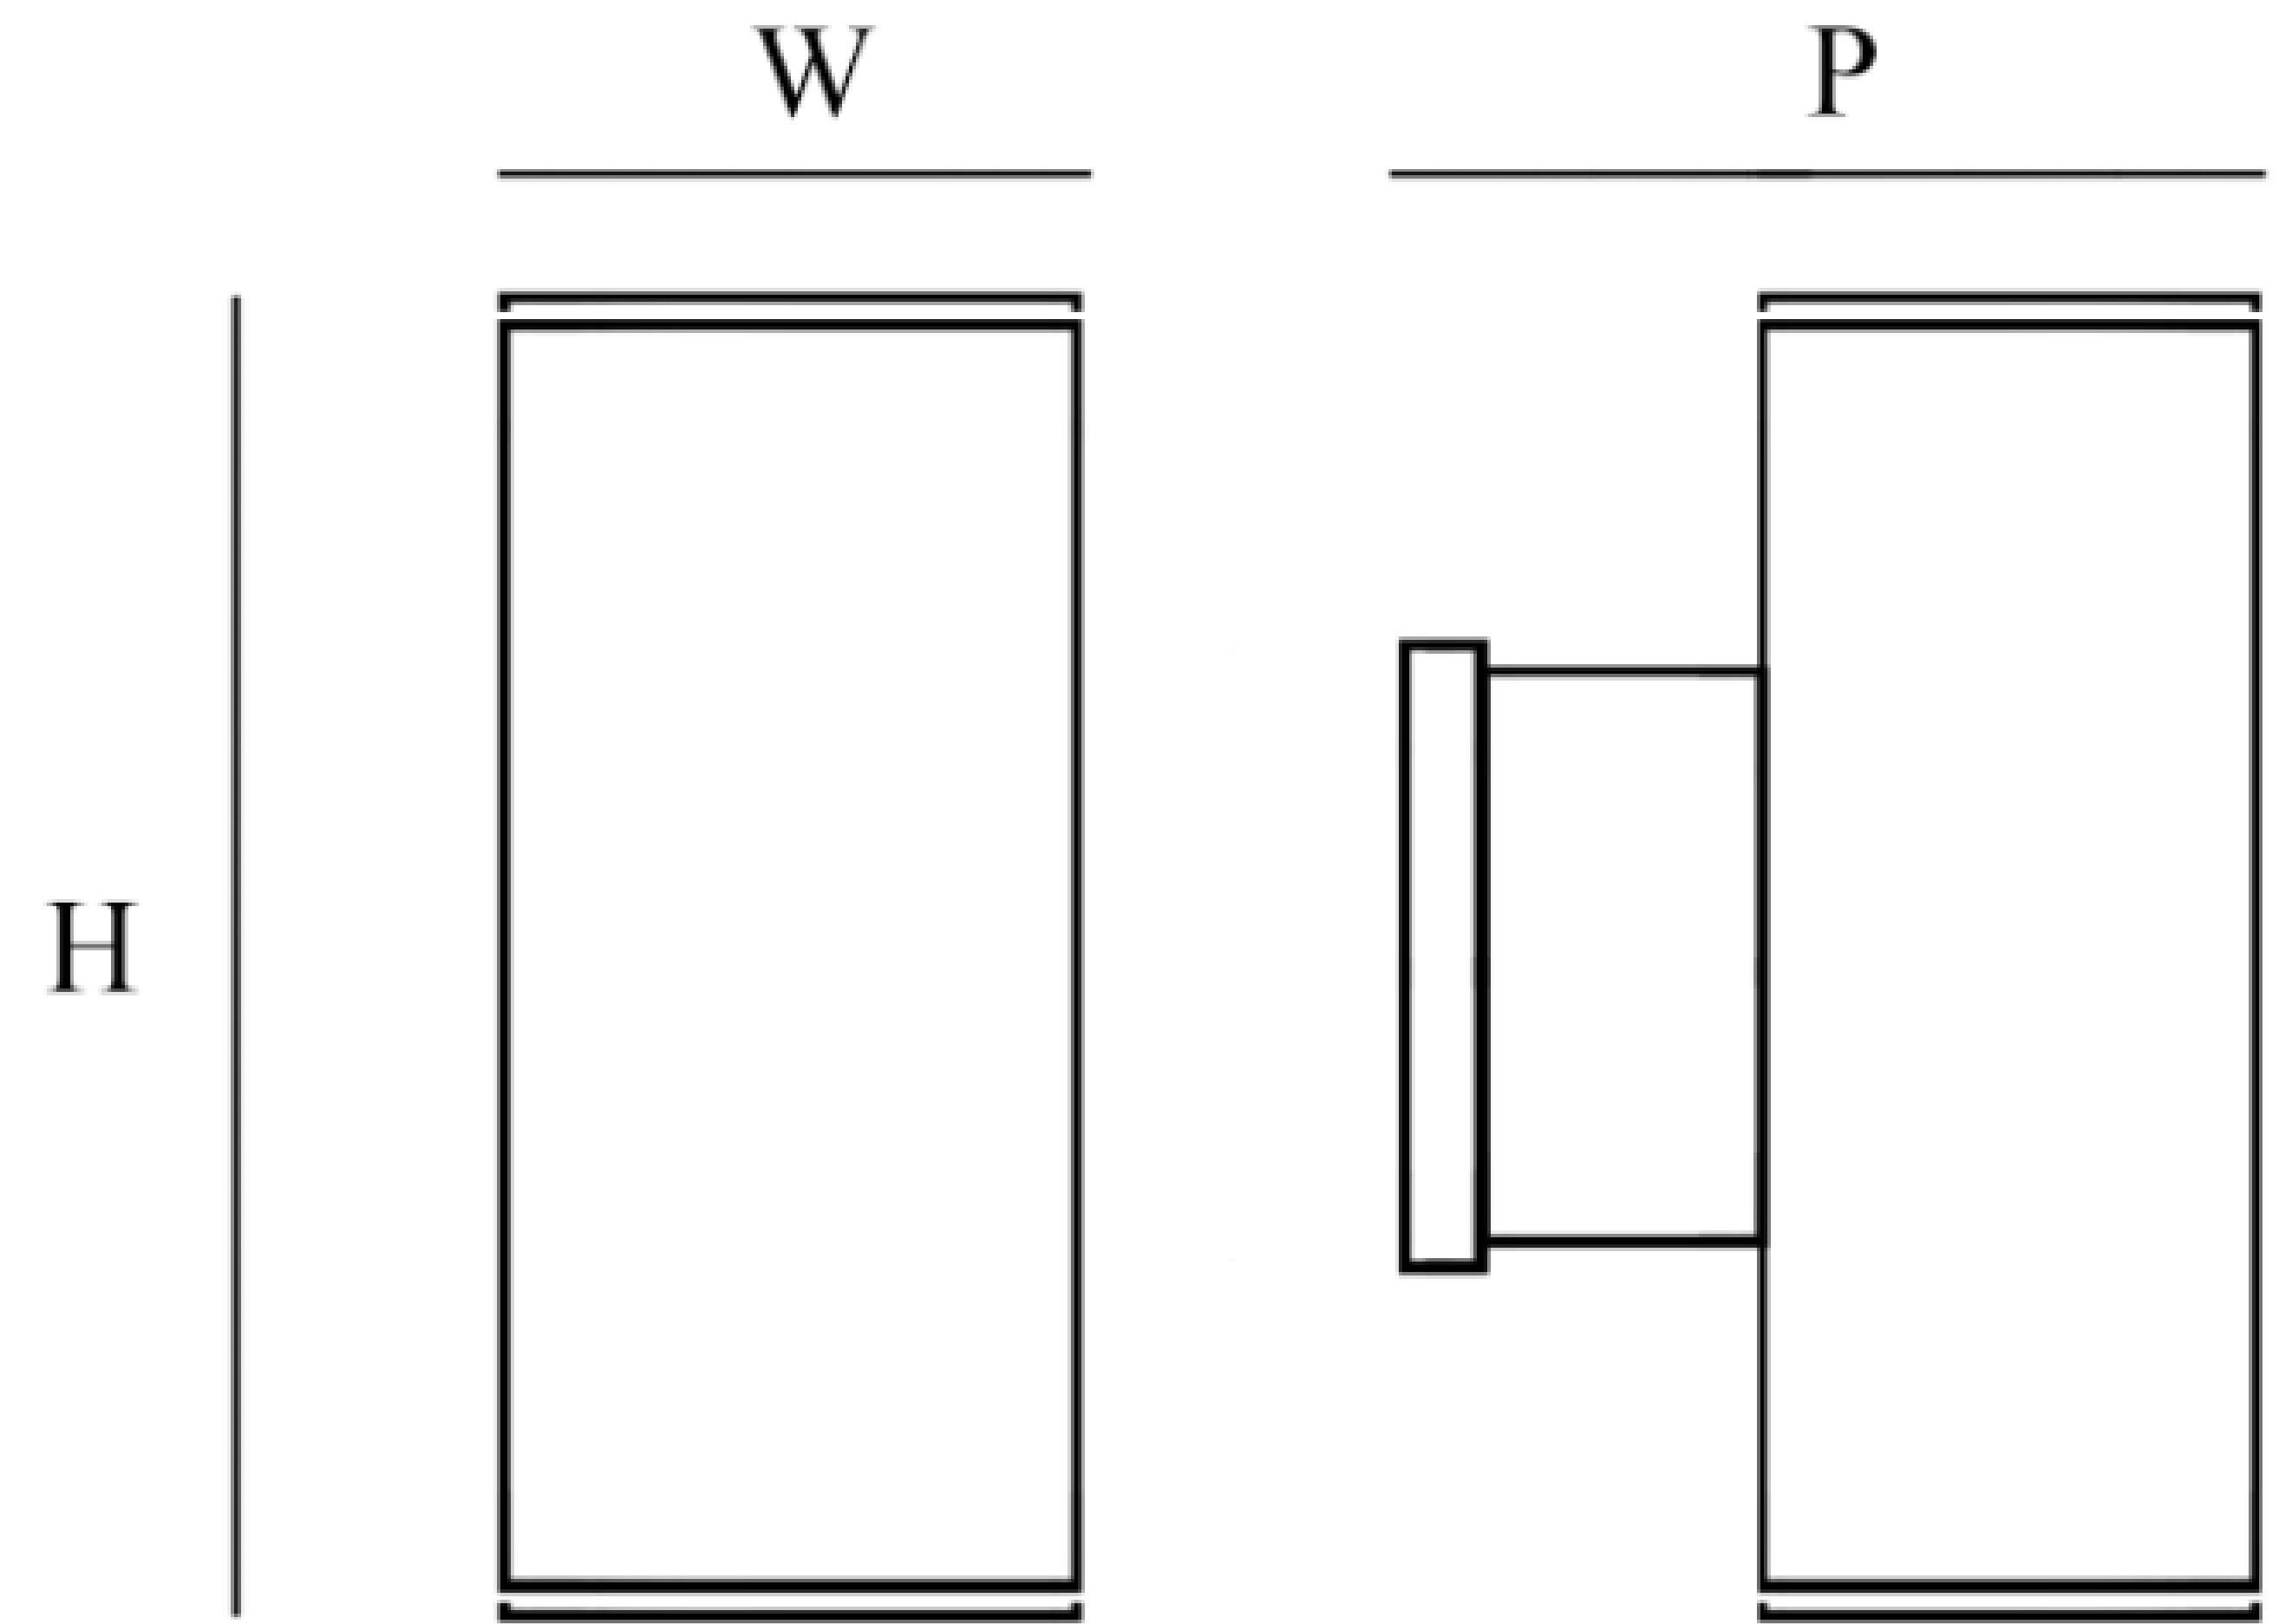

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

