

Plafonira

SLT-2415



PERFORMANCE DATA

Efficacy : 95 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 110 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Polycarbonate Body & Opal diffuser

Mounting : Surface / Wall Mounted


Lens : Opal

Finish : White


Protection Class : IP 66

Mechanical Resistance : IK 08

OPTICS

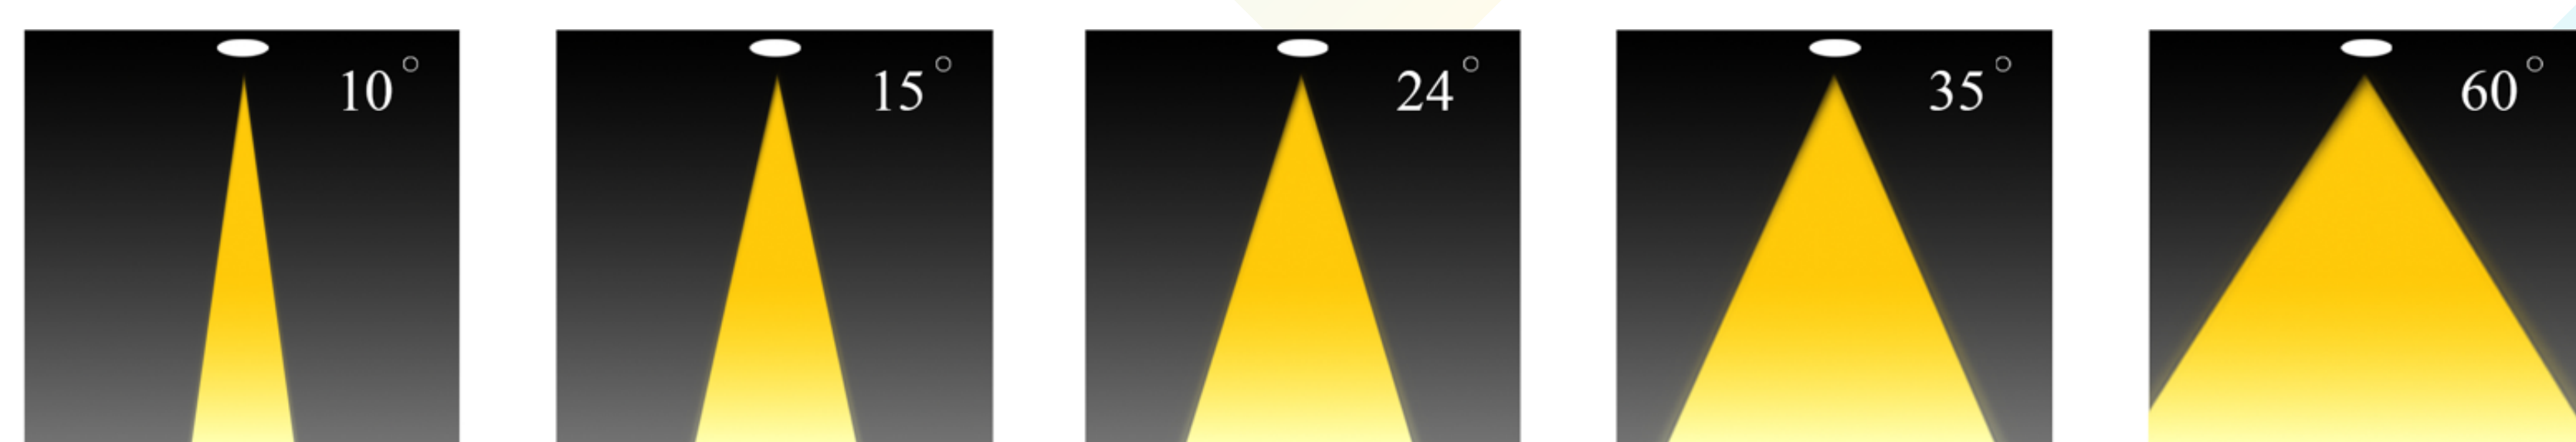

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxP mm	Driver	LED Chip	Weight
24151XXXXXXOTXXX	10 15 20 24	95	3000 4000	260x87 mm	Osram	Tridonic	

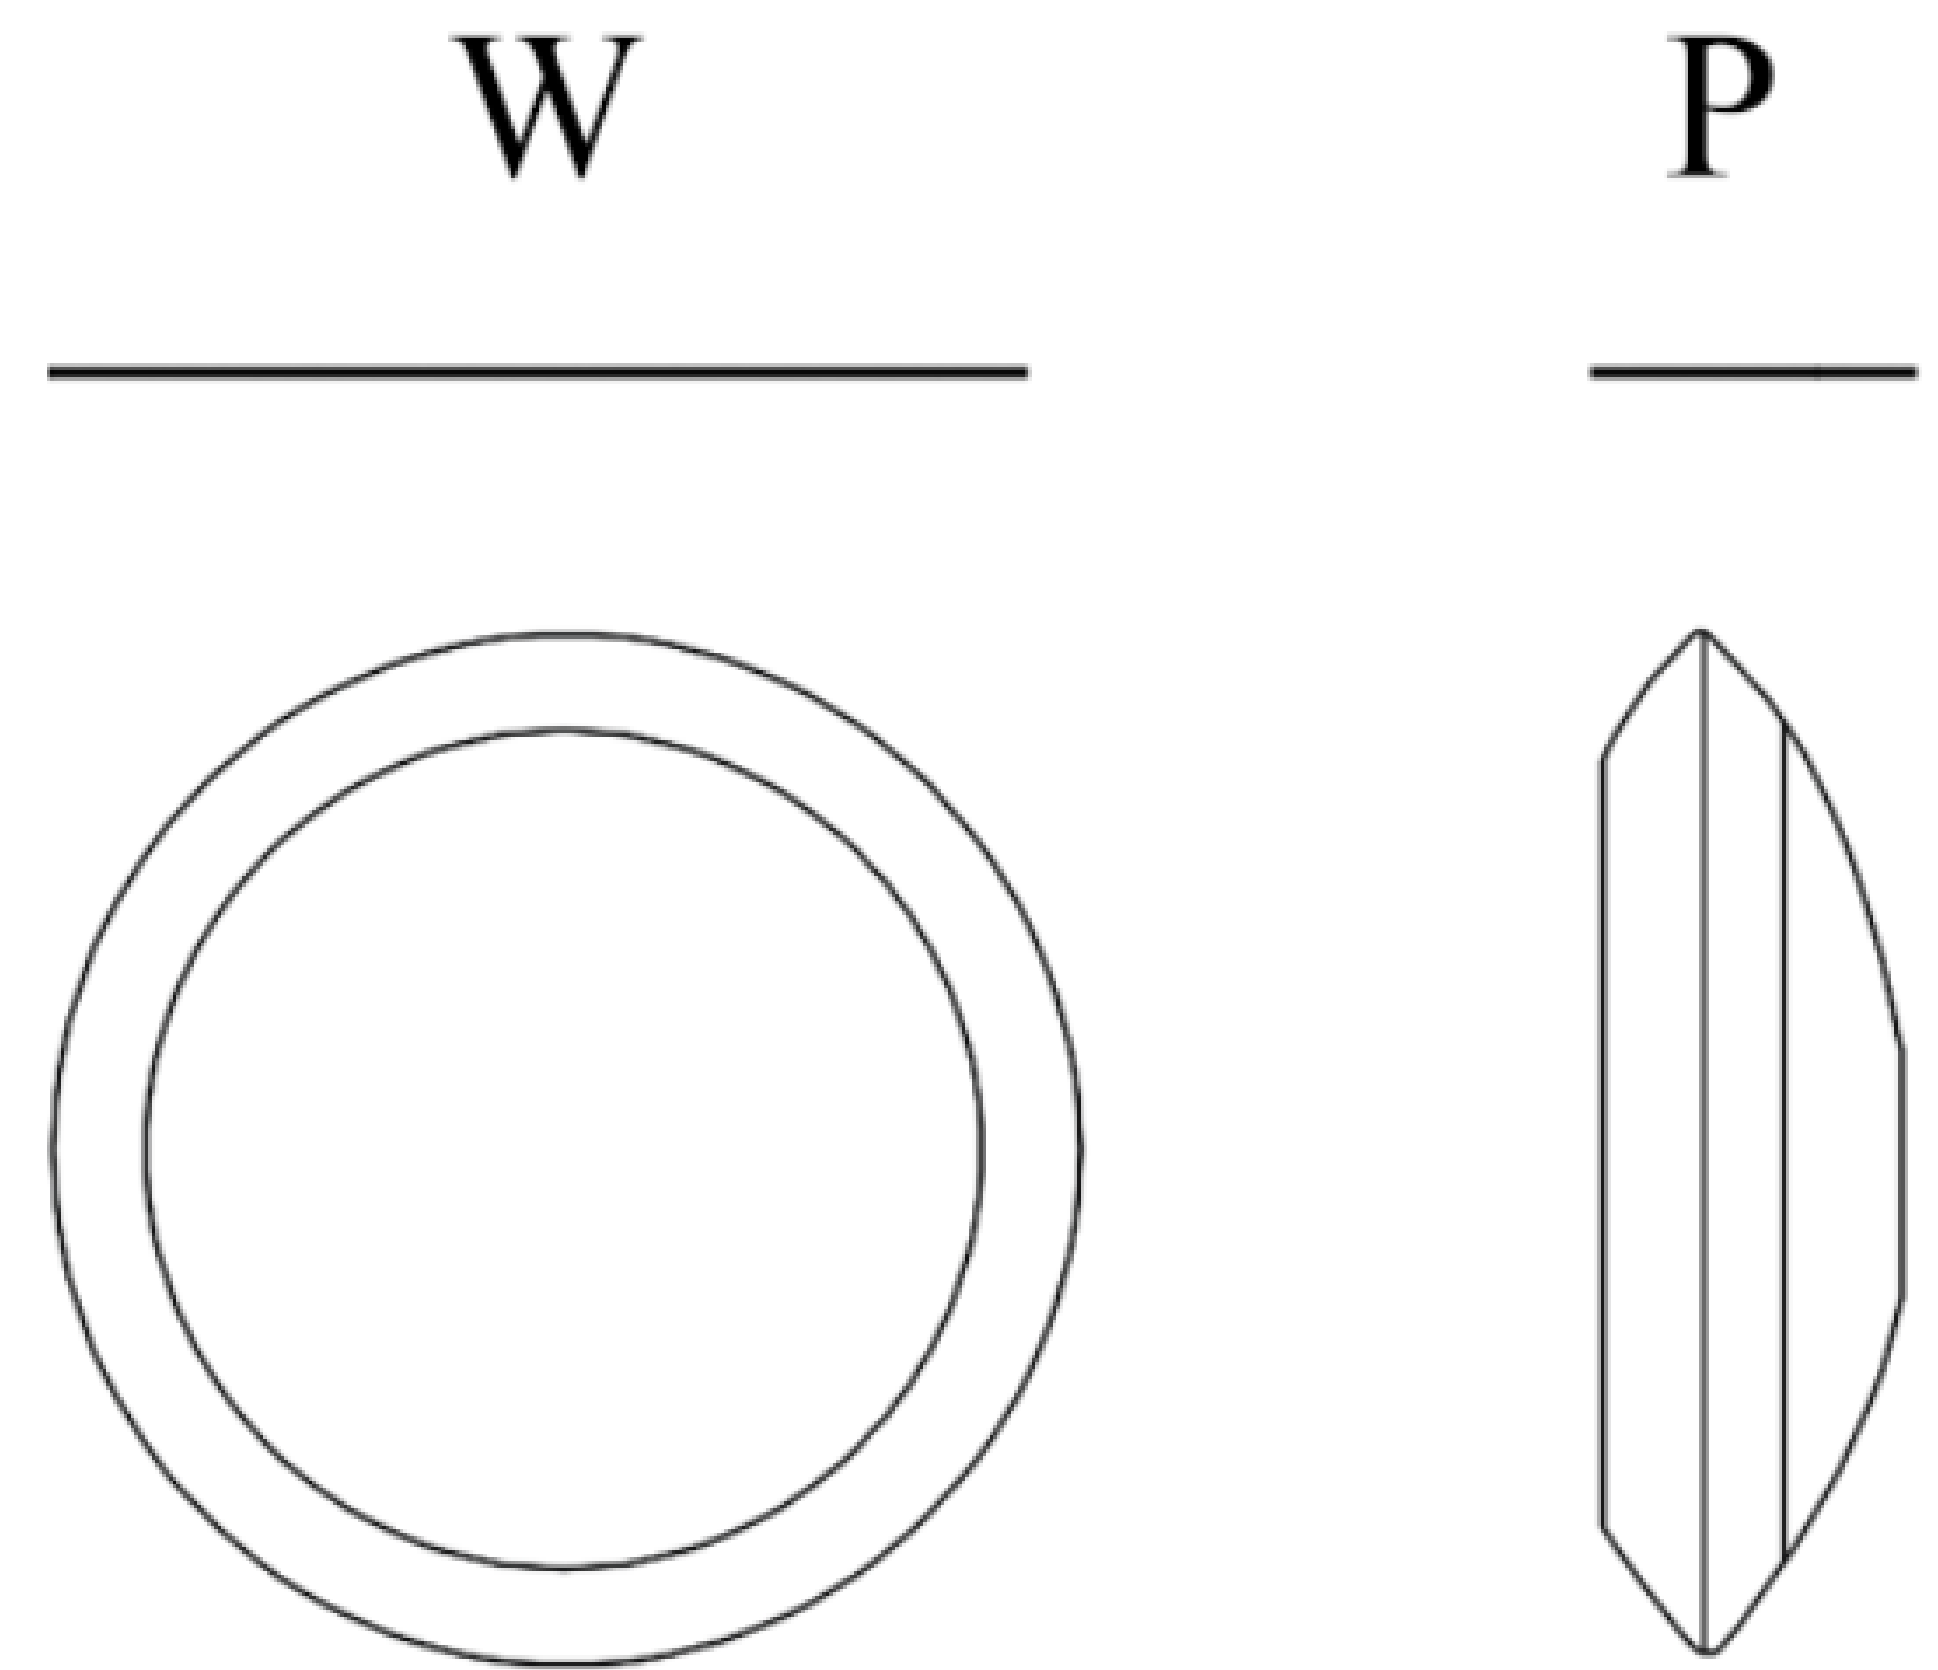

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

