

Panel 60x60

SLT-3015



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 110 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium

Mounting : Recessed mounted

Lens : Opal


Finish : White

Protection Class : IP 40



Mechanical Resistance : IK 06



OPTICS

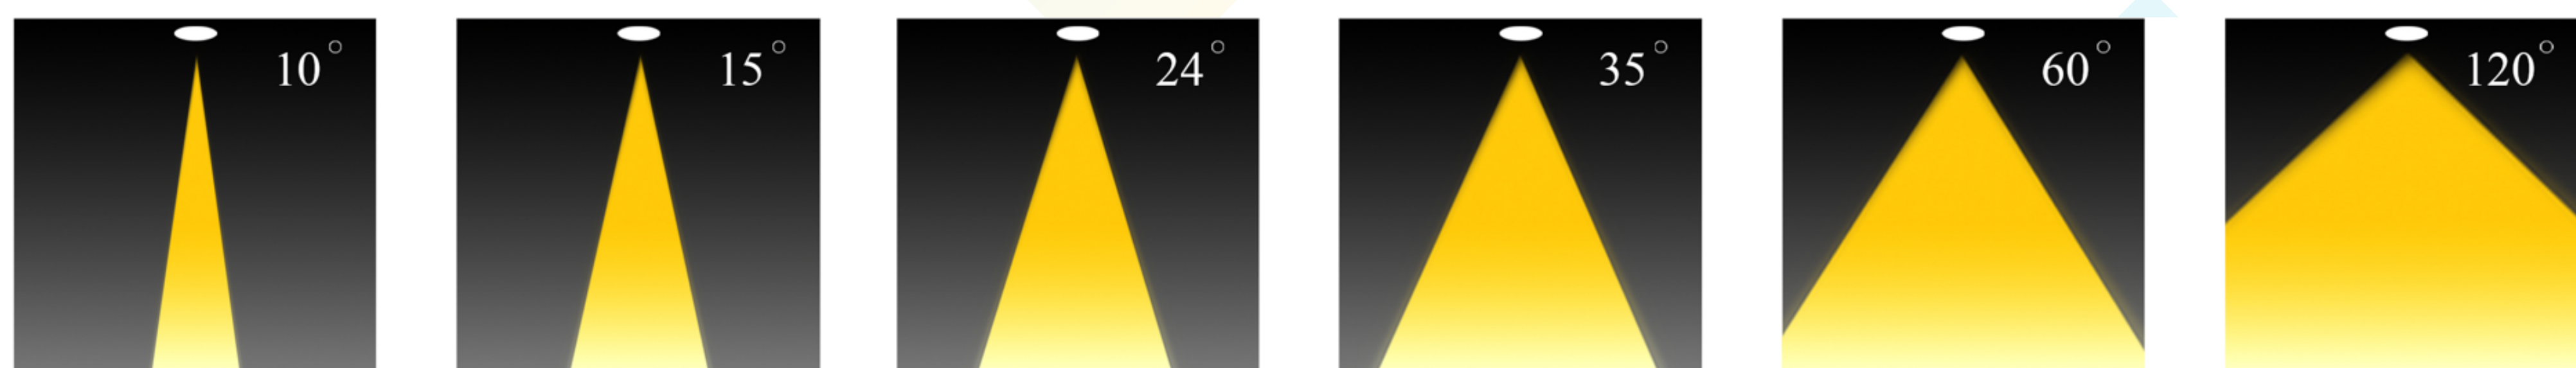

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A x B mm	Driver	LED Chip	Weight
30151XXXXXOTXXX	34 36 40	100	6500	600 x 600 mm	Tridonic	Osram	

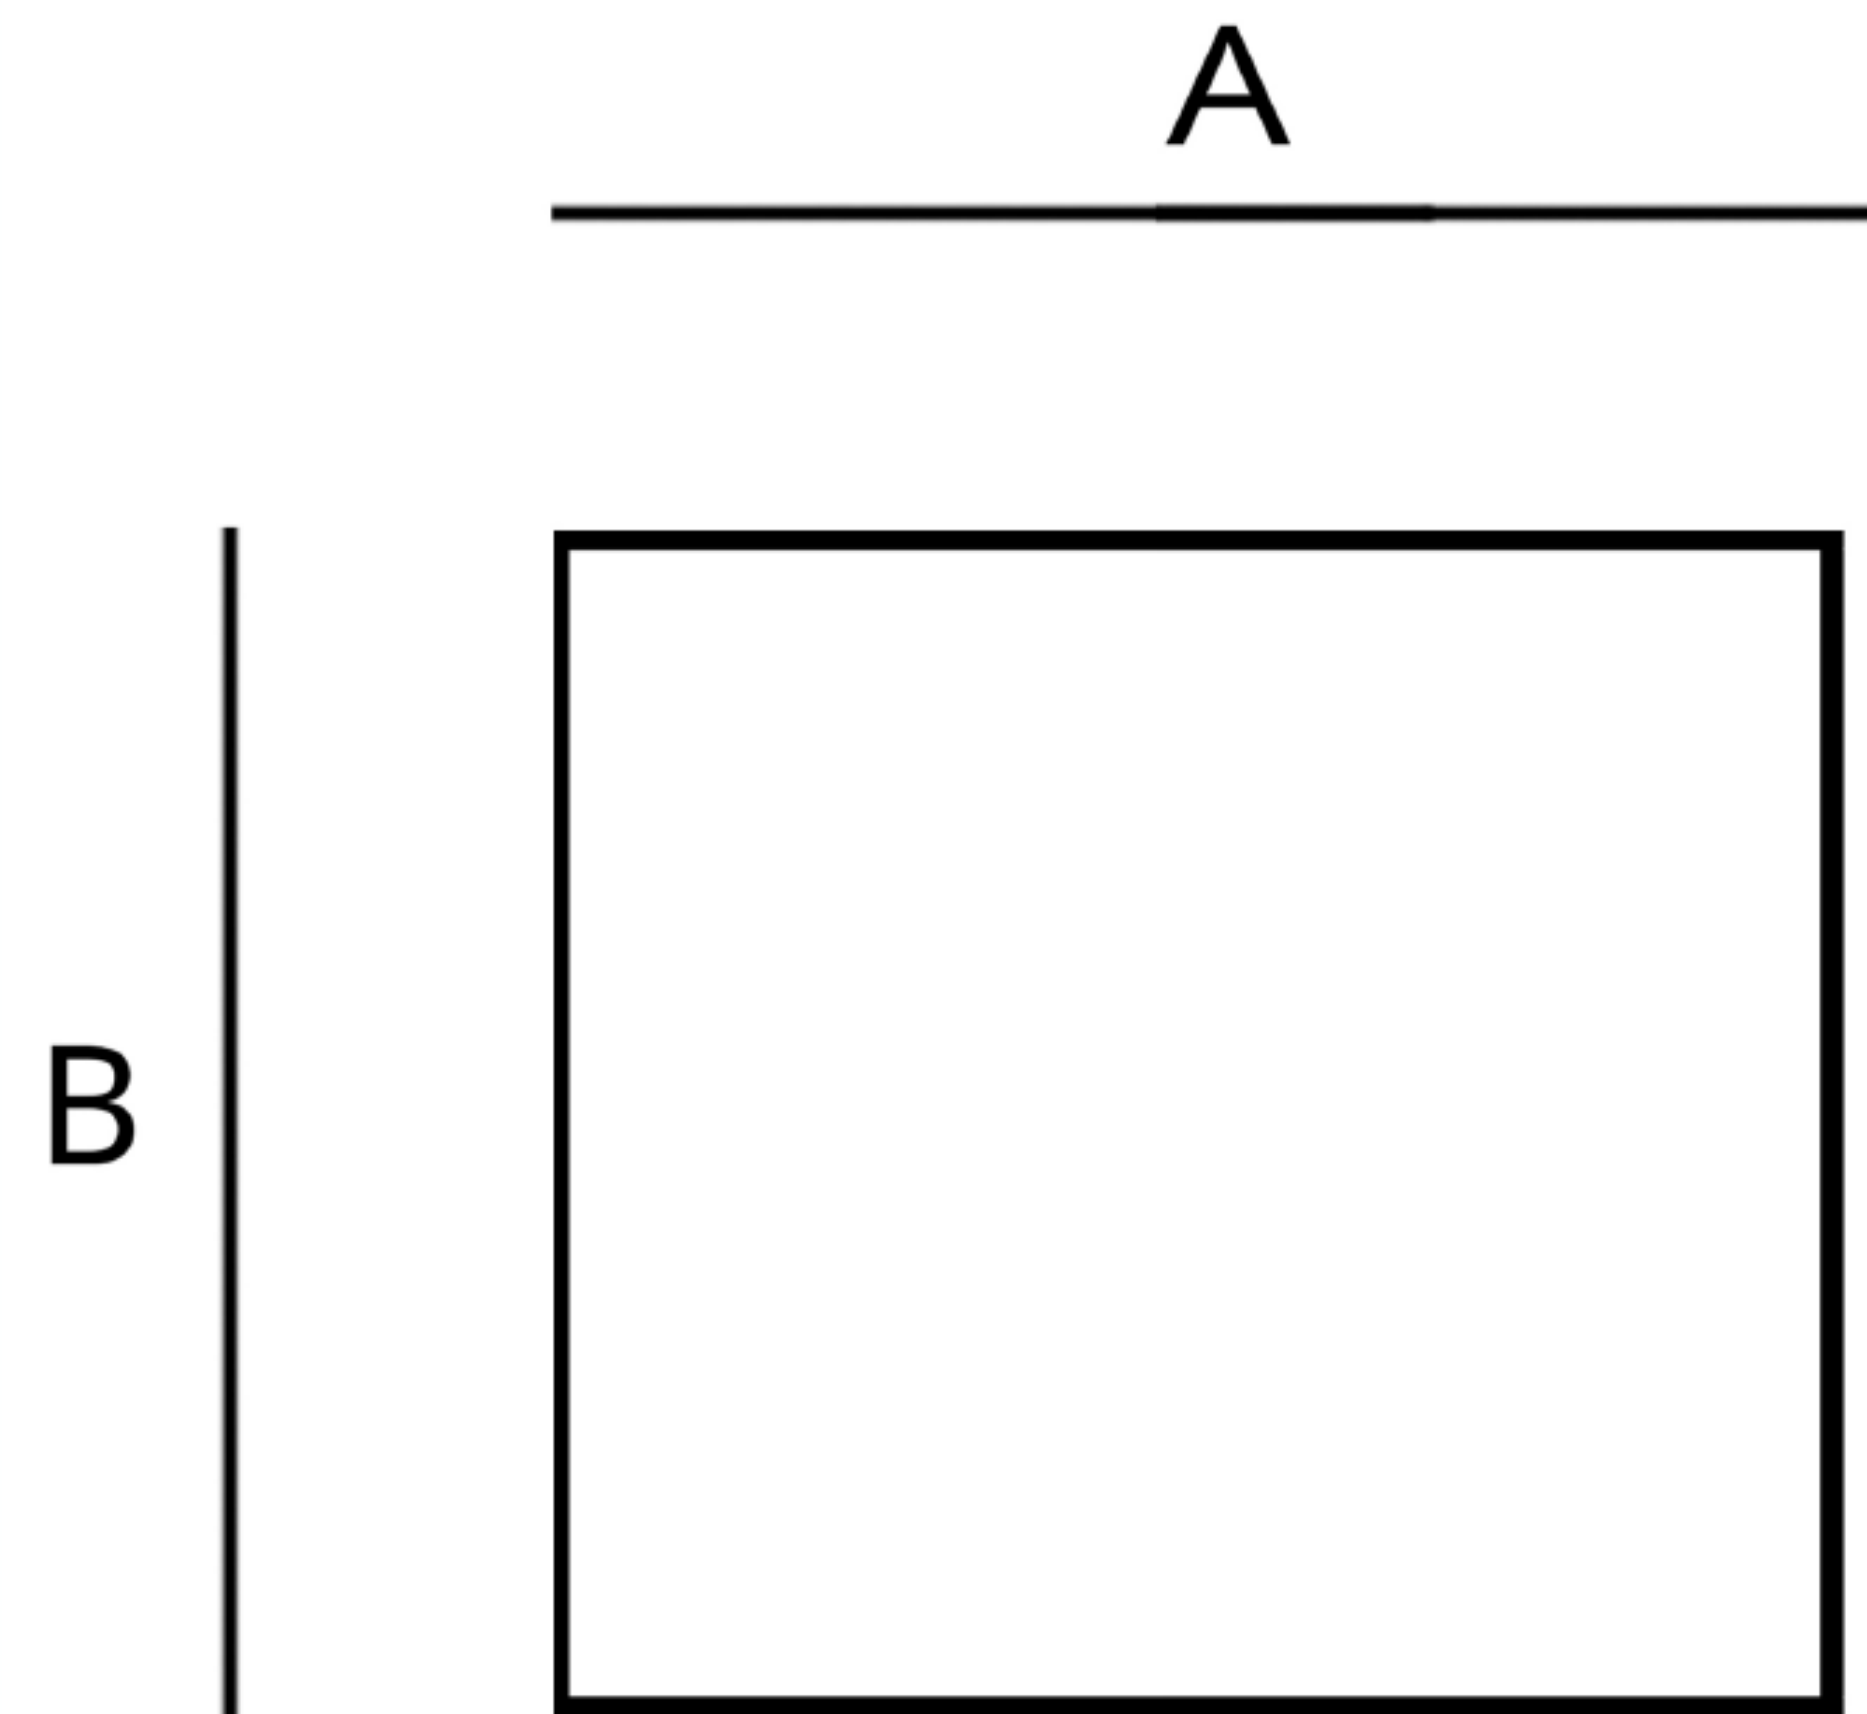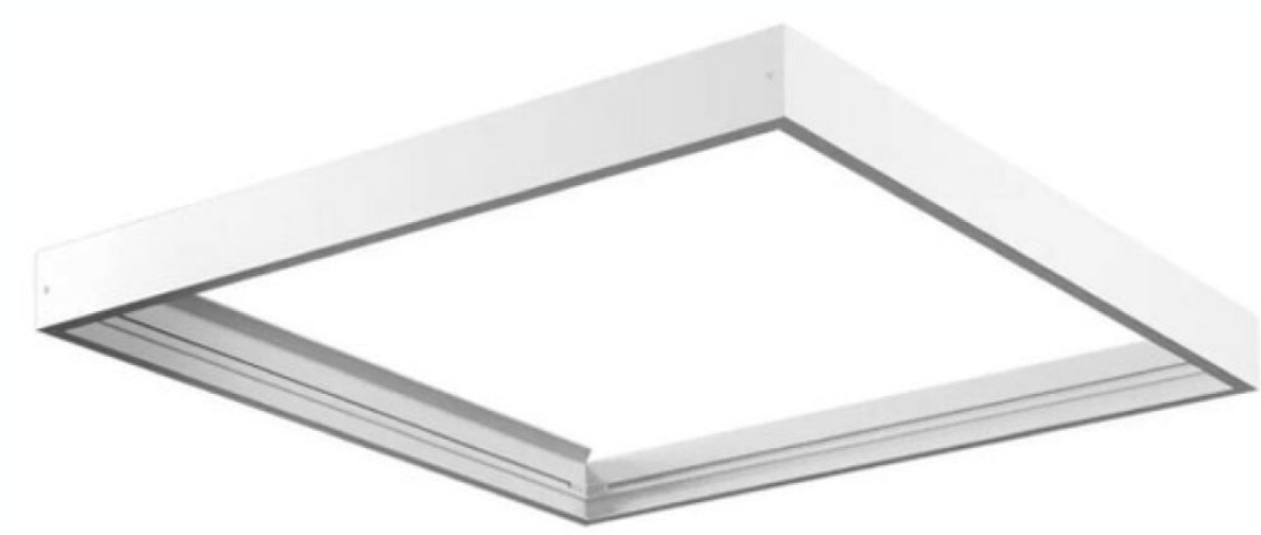

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

Mounting

Surface

POLAR CURVE

