

Panel 120x30

SLT-3016



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 110°

Class : III

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium

Mounting : Recessed mounted

Lens : Opal


Finish : White

Protection Class : IP 40


Mechanical Resistance : IK 06



OPTICS

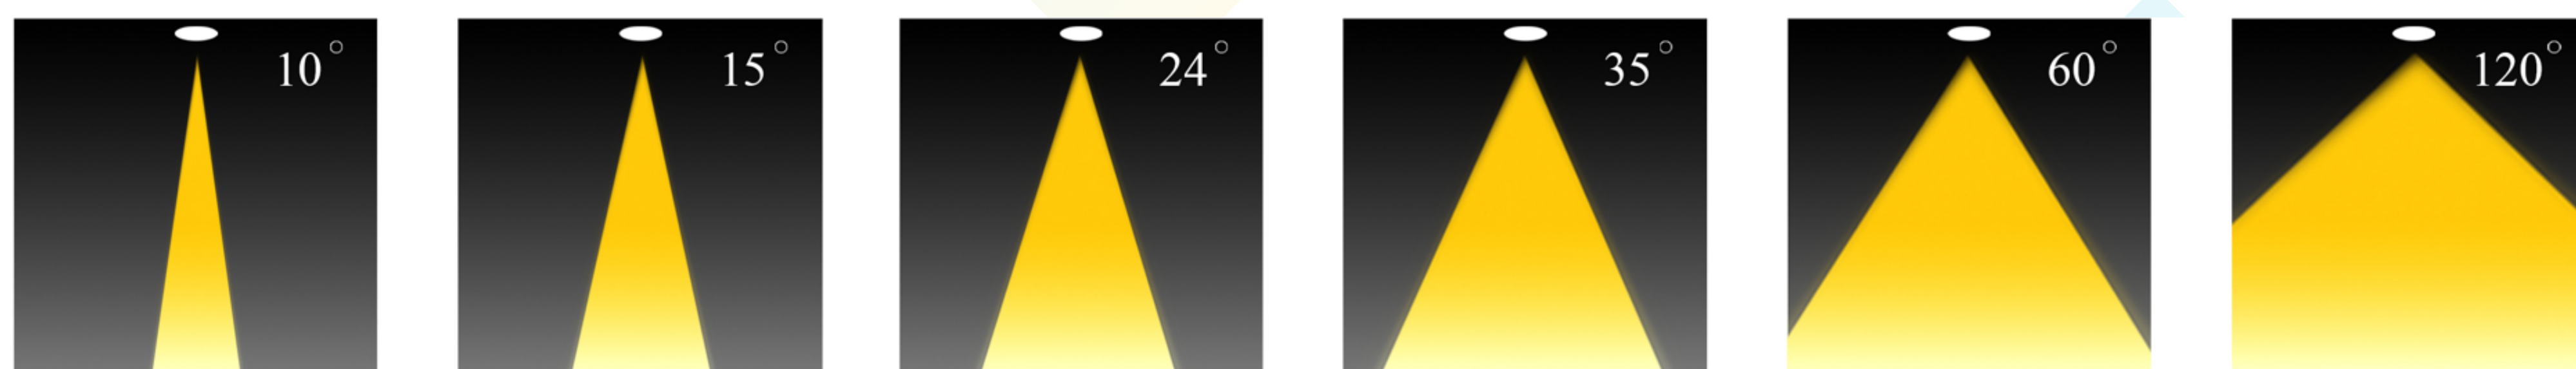

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A x B mm	Driver	LED Chip	Weight
30161658XXXOT040	40	100	6500	1200 x 300 mm	Tridonic	Osram	



CUSTOMISZE OPTIONS

3K	4K	6.5K	CRI >80	DALI	Mounting Surface
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80		

POLAR CURVE

