

Flood Light

SLT- 4005



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Mounting : Surface mounted


Lens : Glass

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

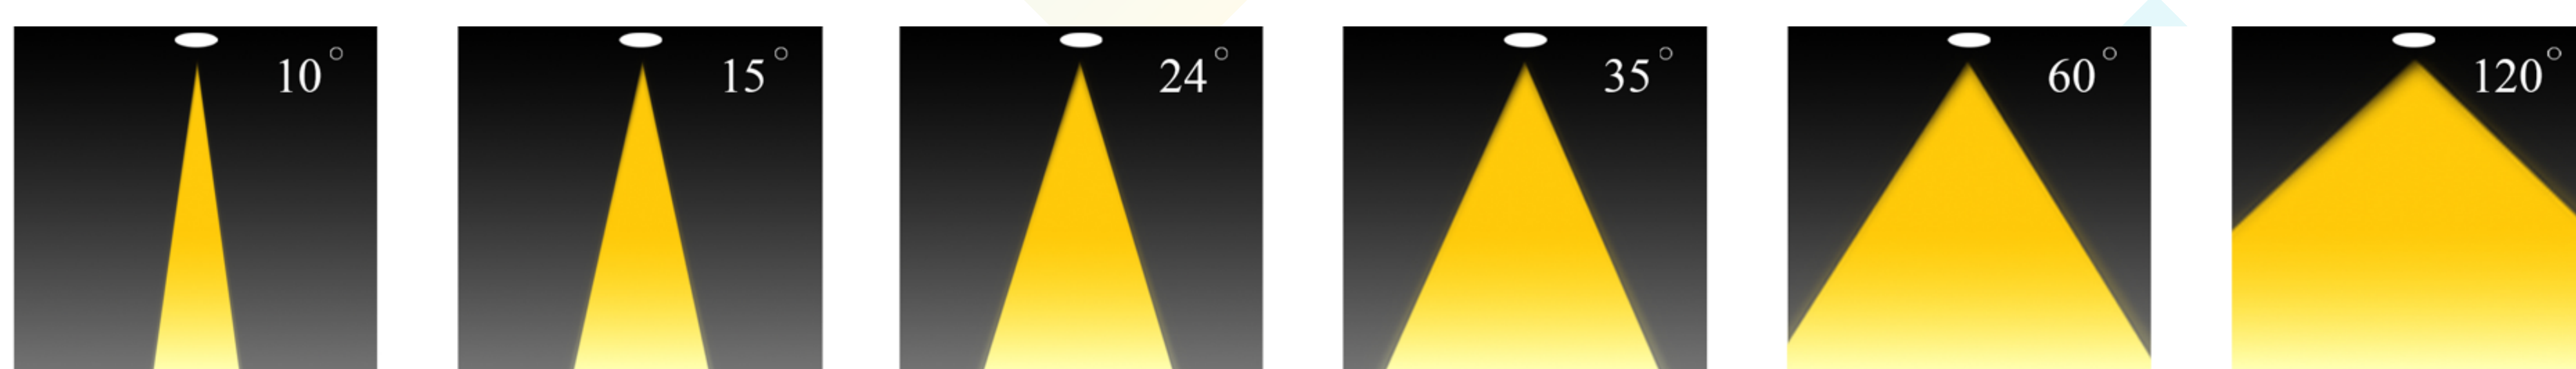

| Code | Power W | Efficacy Lm/W | Colour Temp. K | Dimensions AxB mm | Driver | LED Chip | Weight Kg |
|-----------------|--------------------------------|------------------|----------------------|----------------------|--------------------------------|----------|--------------|
| 1143XX8120LXXXX | 50 100 150 200 300 | 130 | 3000 4000 6500 | 503x384 mm | CE Philips Lifud Moso | Lumiled | 2.585 |

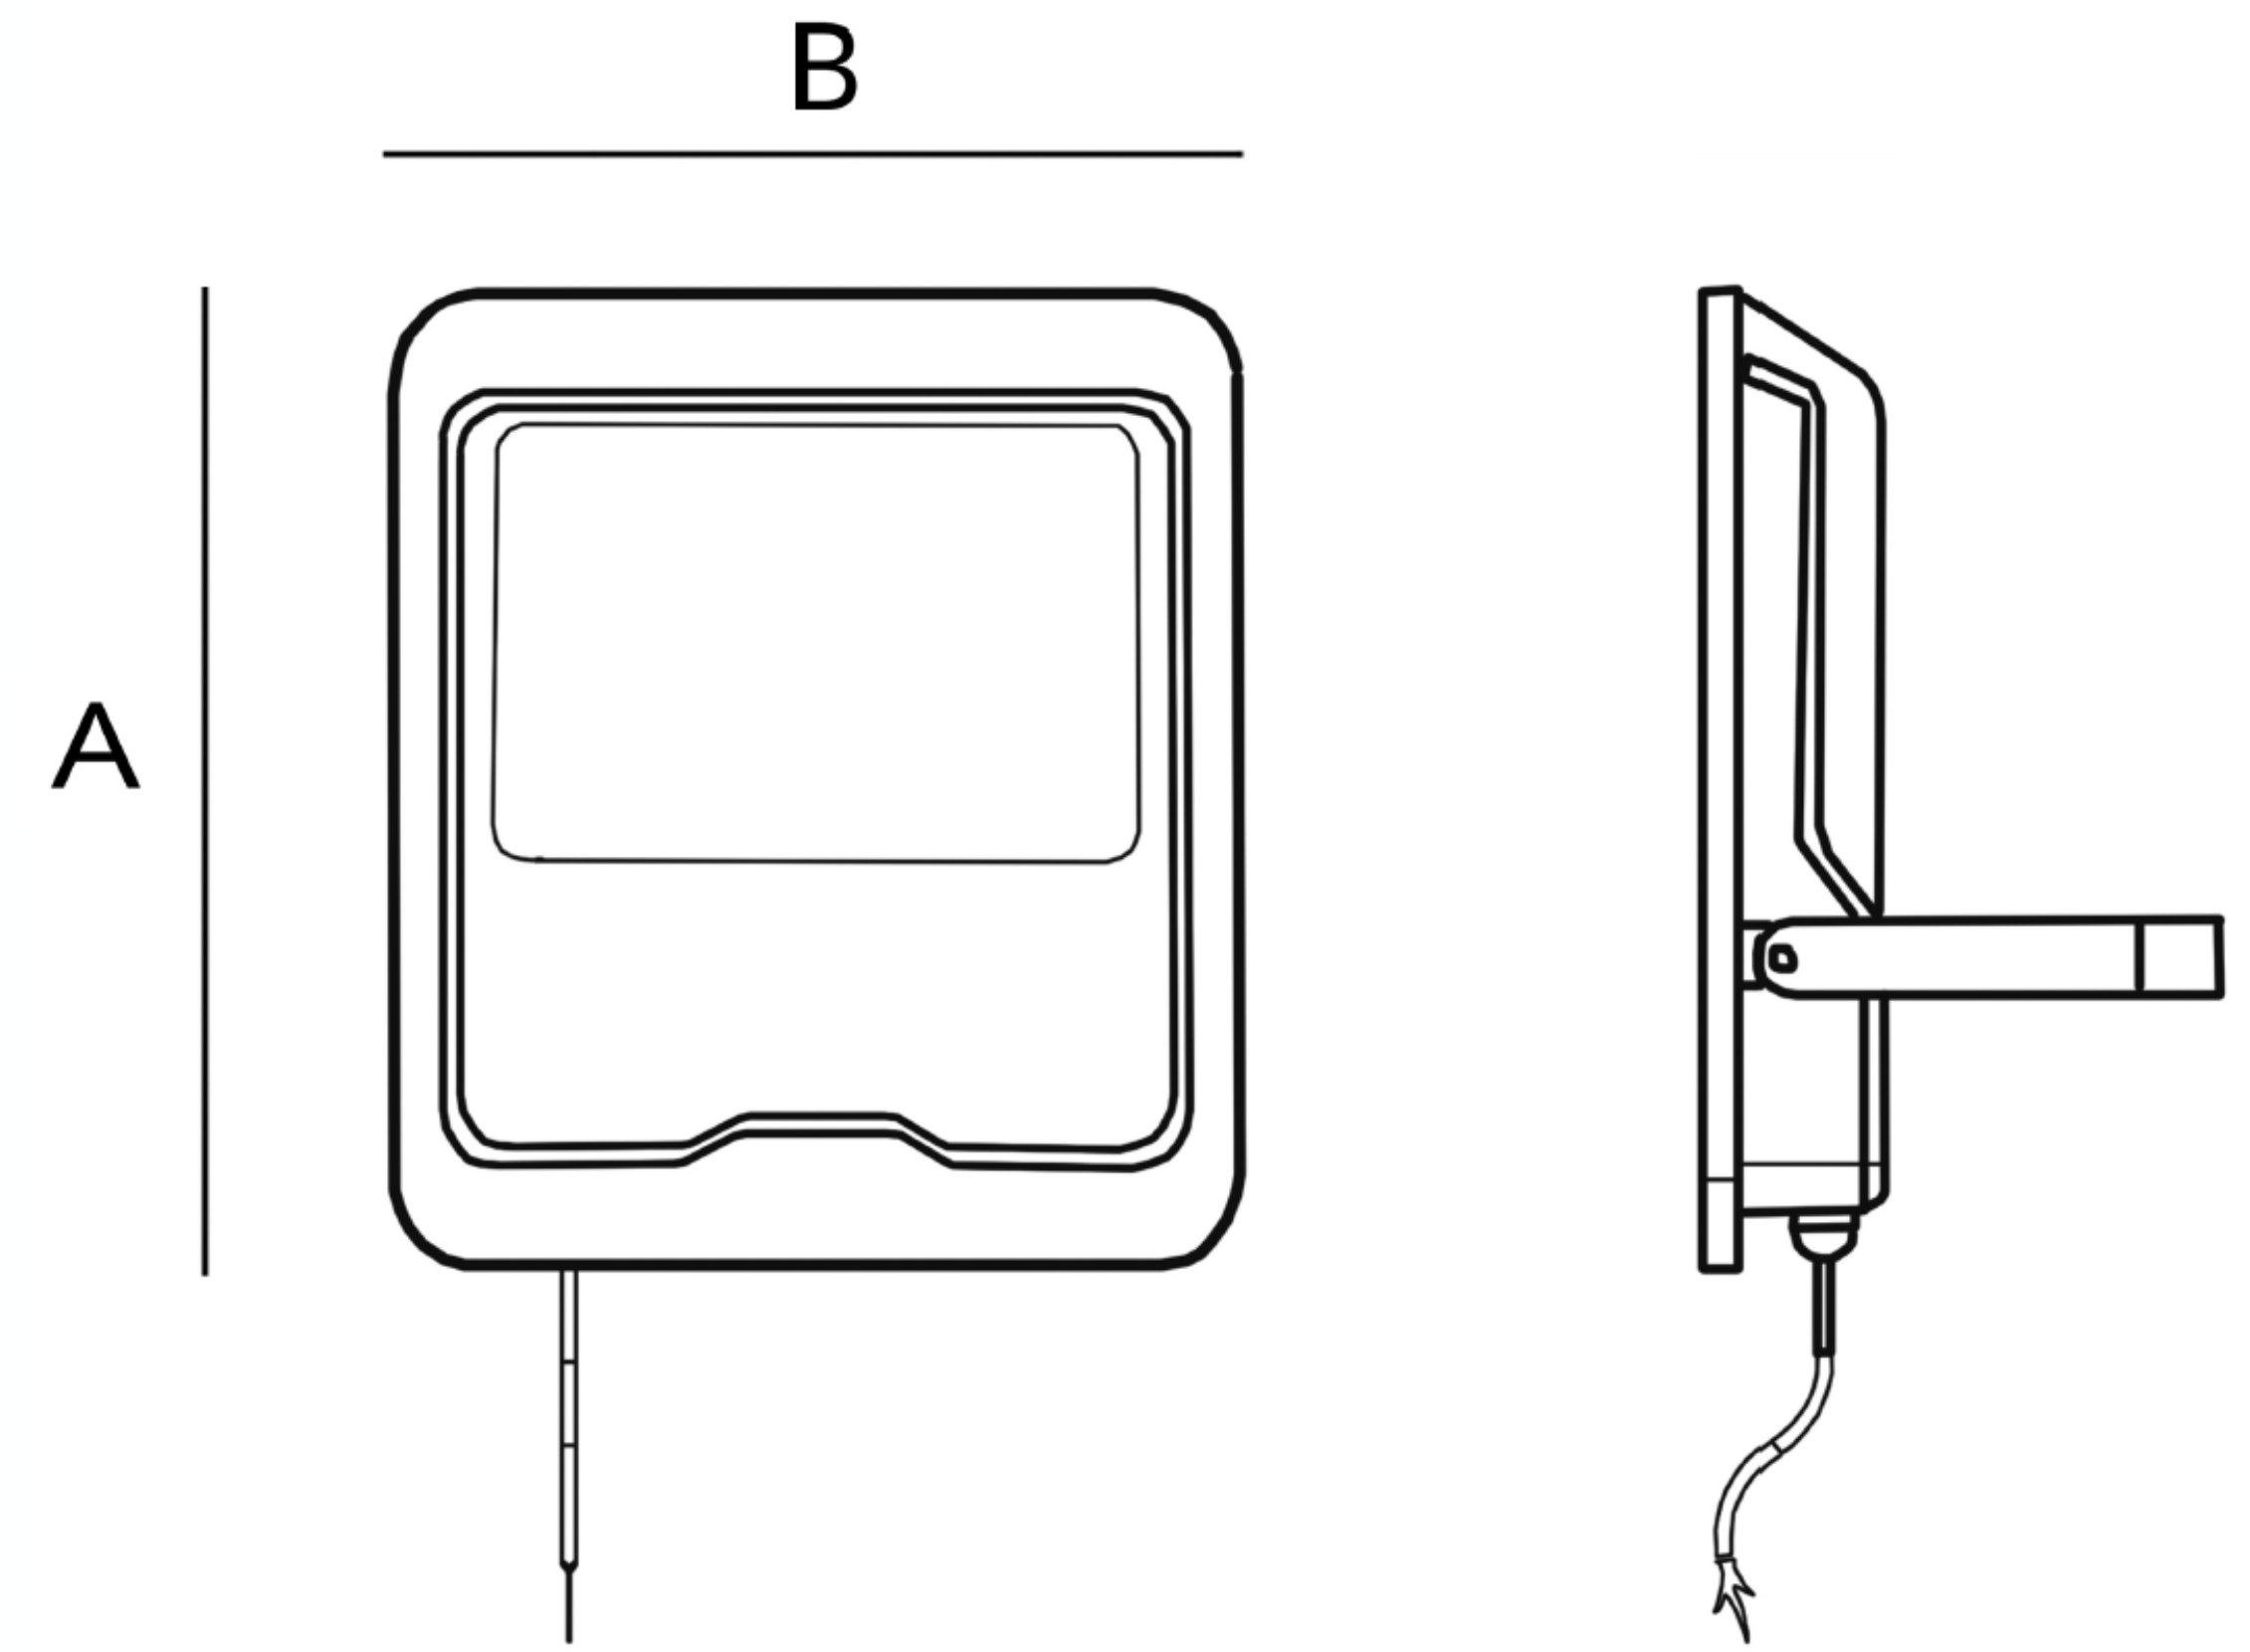

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

