

Flood Light

SLT-4042



PERFORMANCE DATA

Efficacy : 160 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 70

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Mounting : Surface mounted


Lens : Opal

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

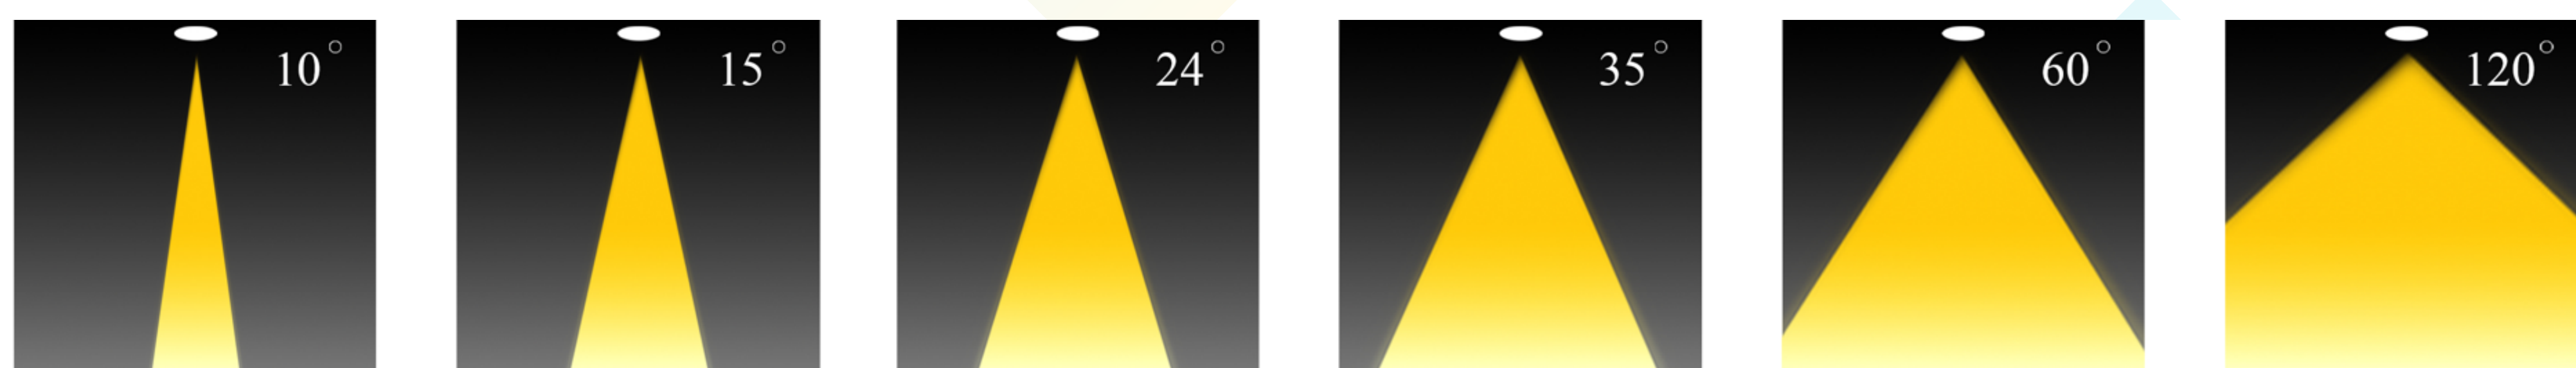

Code	Power W	Efficacy Lm/W	Colour Temp. M	Dimensions AxBxC mm	Driver	LED Chip	Weight
404236570120XPXXX	300 400 500 600	160	4000 6500	537x474x60 mm 537x474x60 mm 537x570x60 mm 537x570x60 mm	Philips	Lumiled Philips	

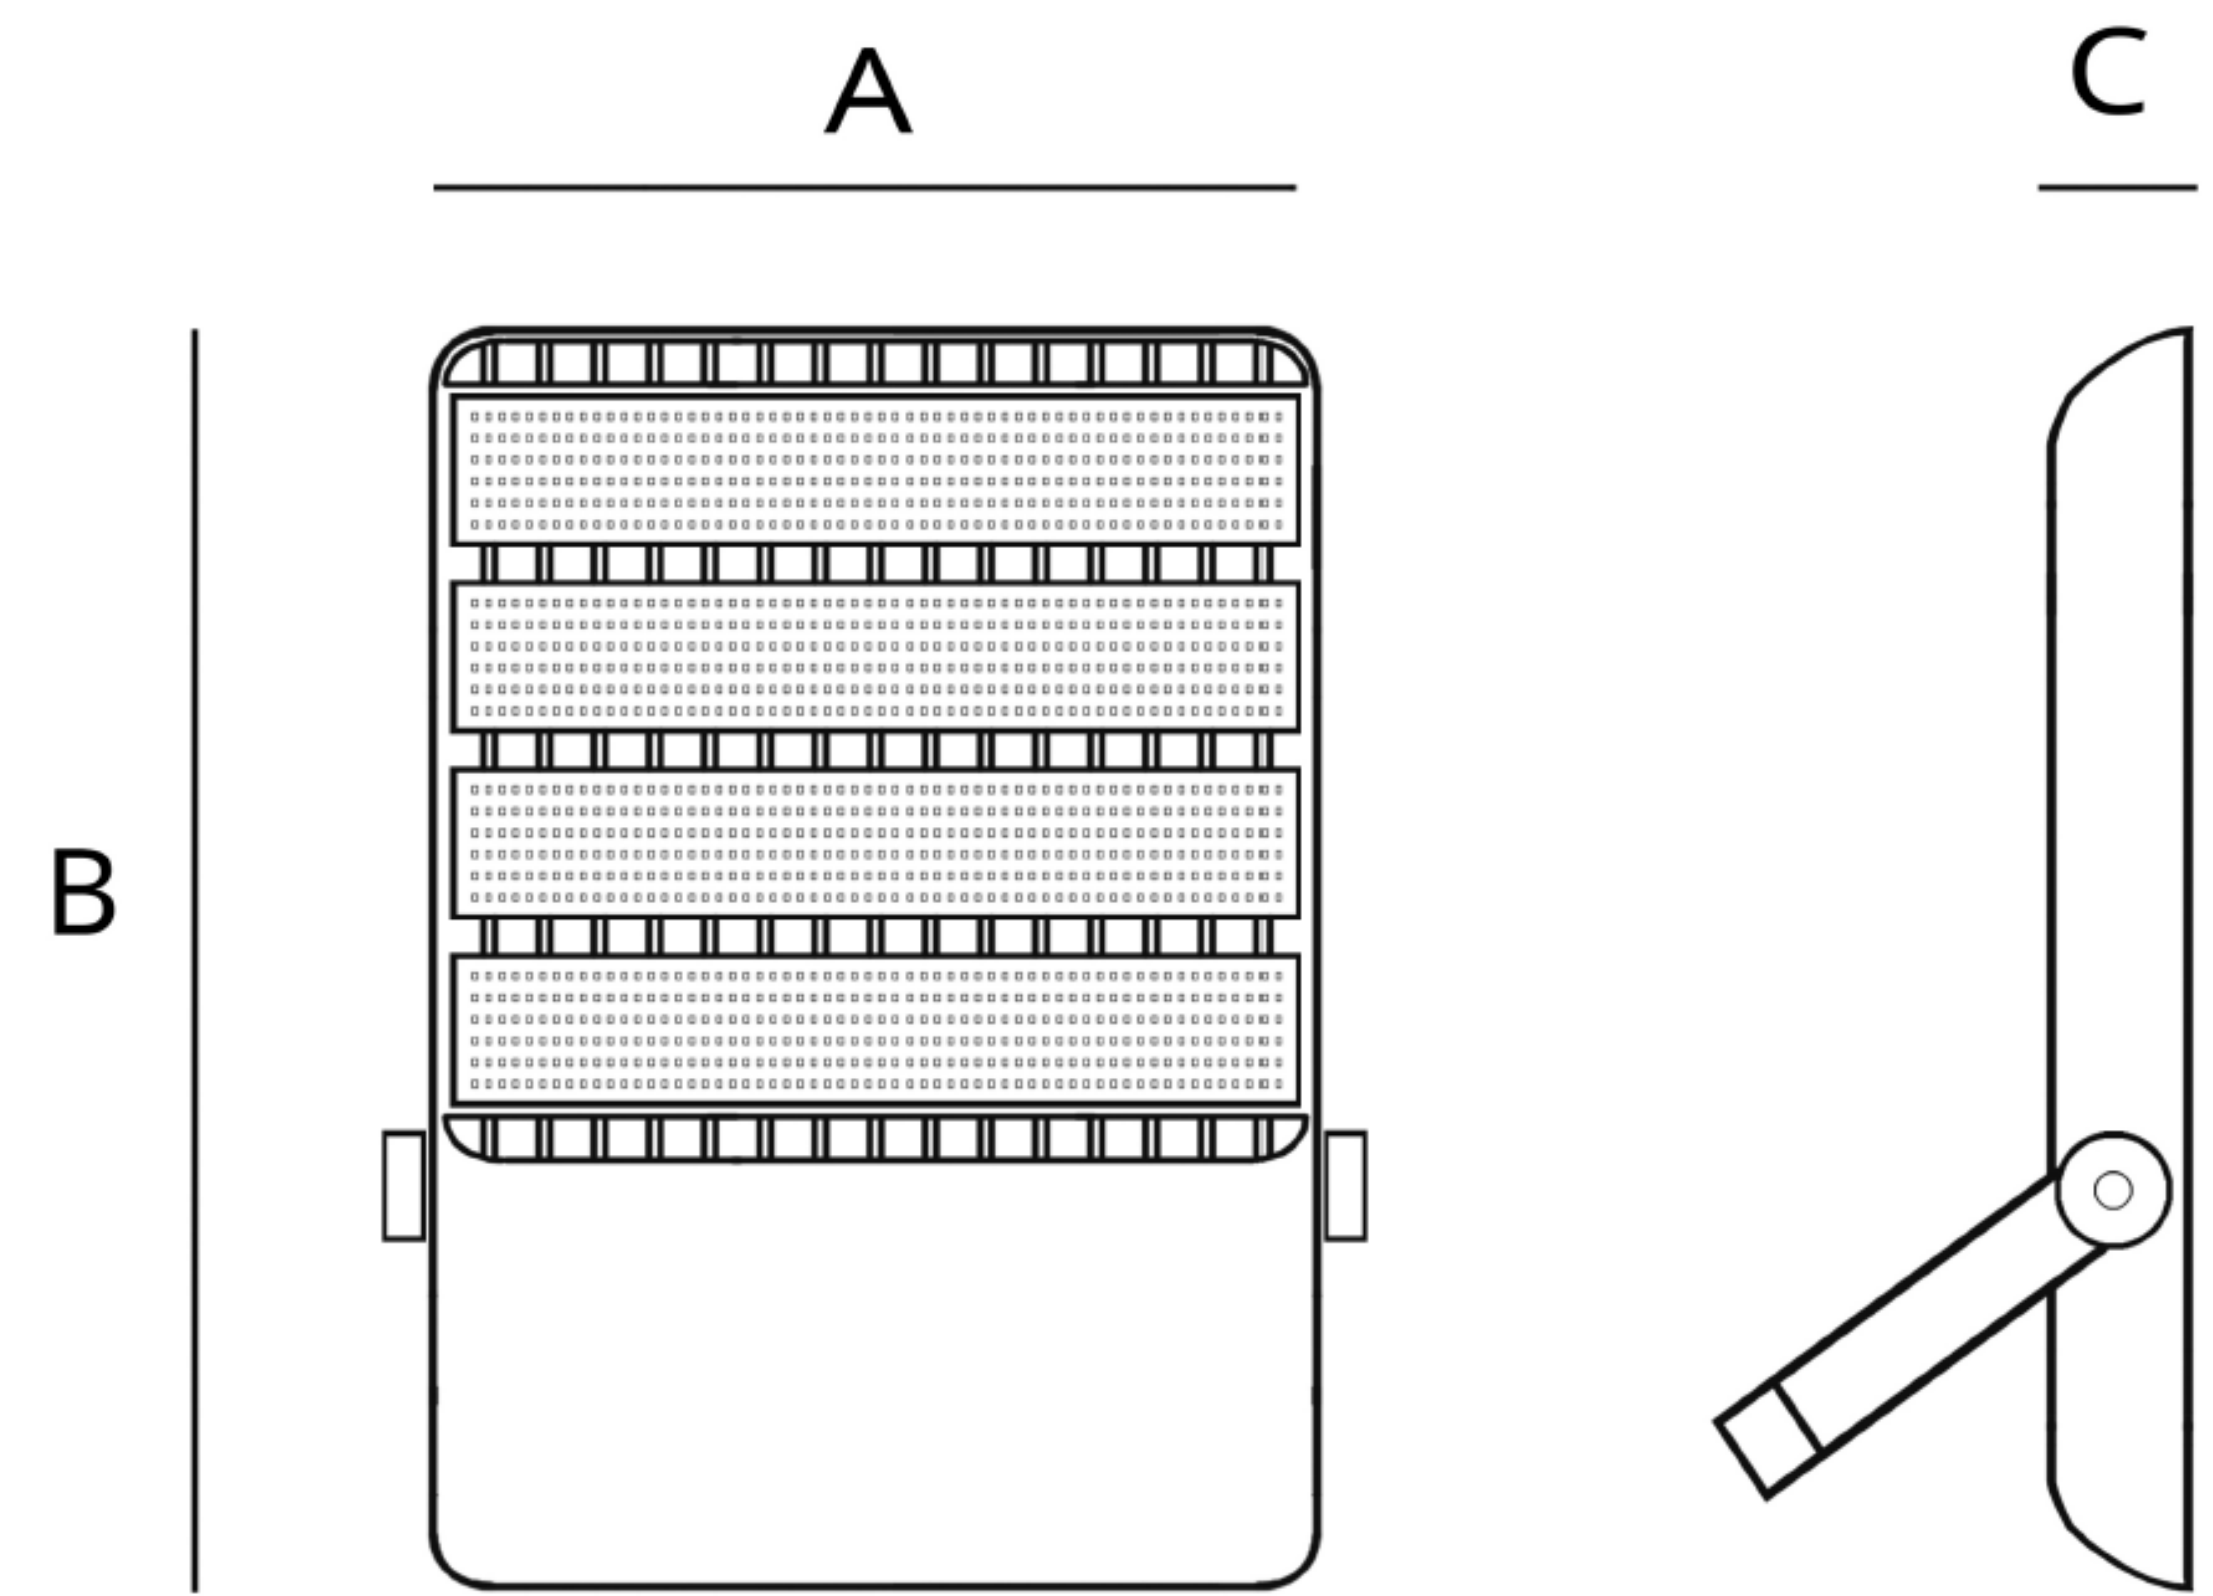

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

