

Highbay

SLT - 5009



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 90 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Mounting : Suspended

Lens : PC


Finish : Black

Protection Class : IP 65


Mechanical Resistance : IK 08



OPTICS

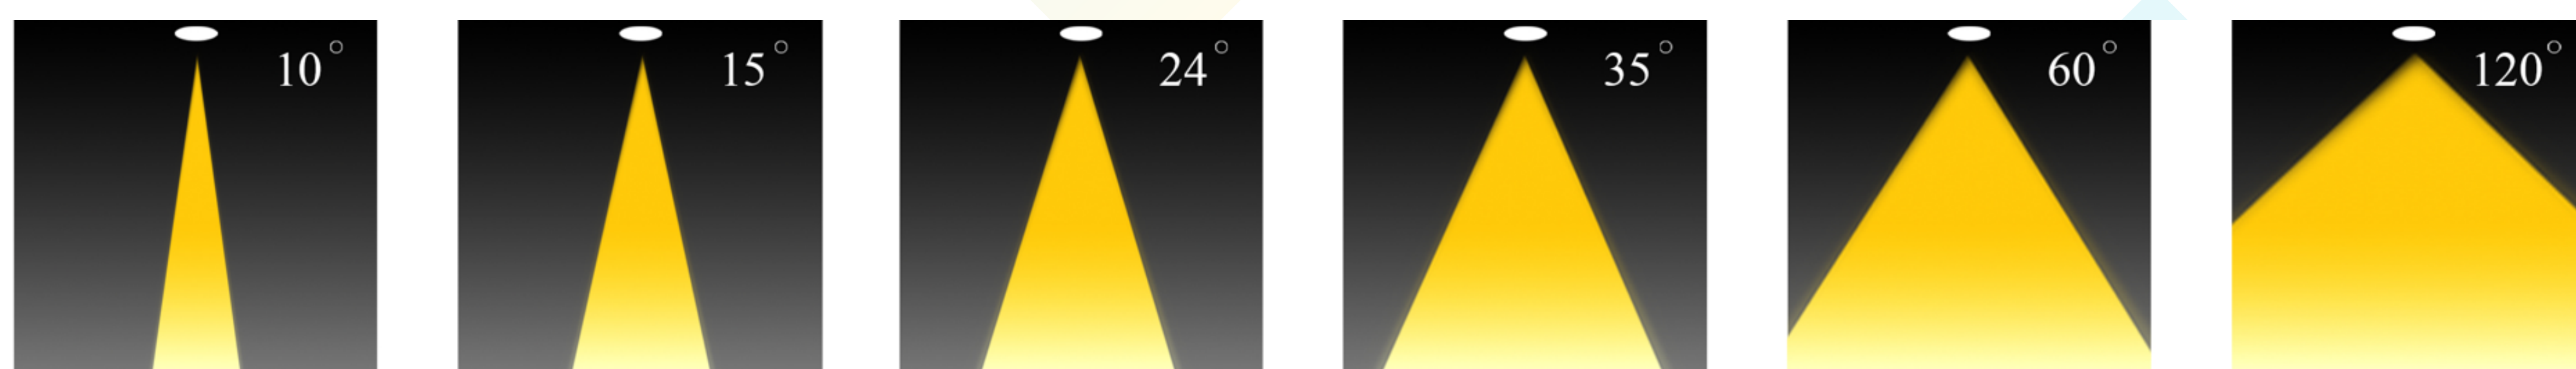

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
1082308120LLXXX	100 120 150 200 250	140	3000 4000 6500	297x105 mm	CE Philips Lifud Done	Lumileds	2.720

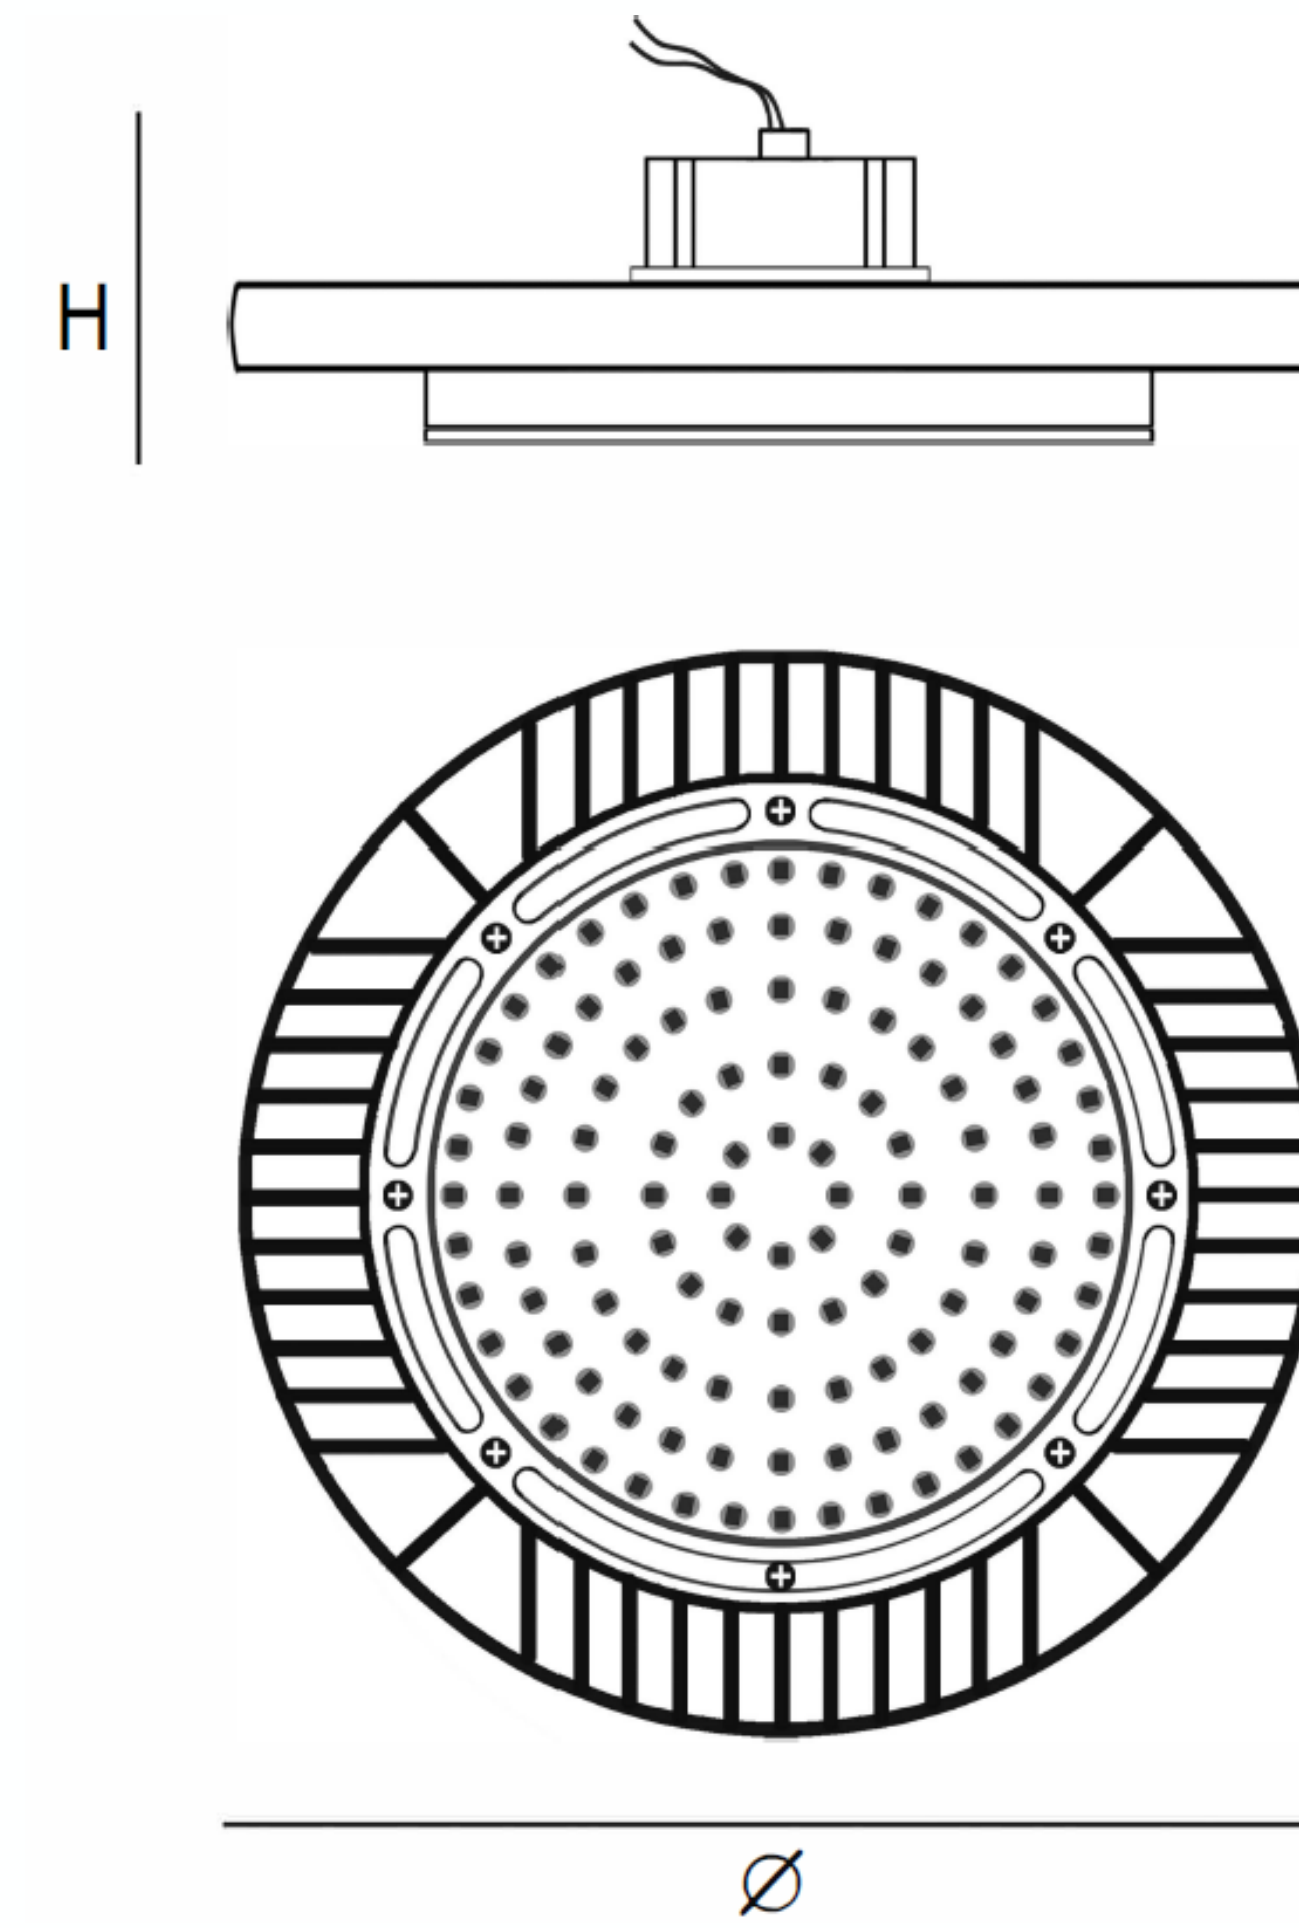

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

