

Highbay

SLT- 5013 - Mega With Arm



PERFORMANCE DATA

Efficacy : 140 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Frame : Metal

Mounting : Suspended


Lens : Glass

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

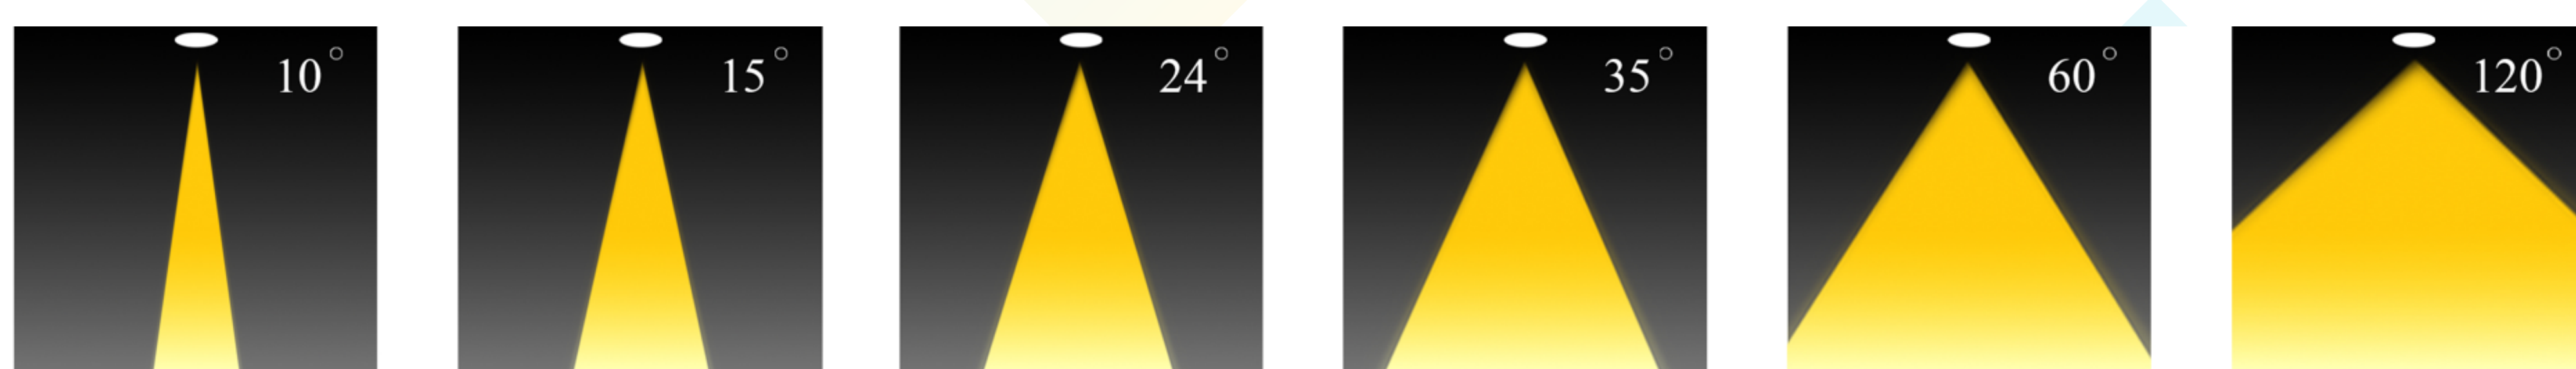

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
50132XX8120LXXXX	100 150 200 240	140	3000 4000 6500	354x144 mm	Lifud Philips	Lumileds	5.080

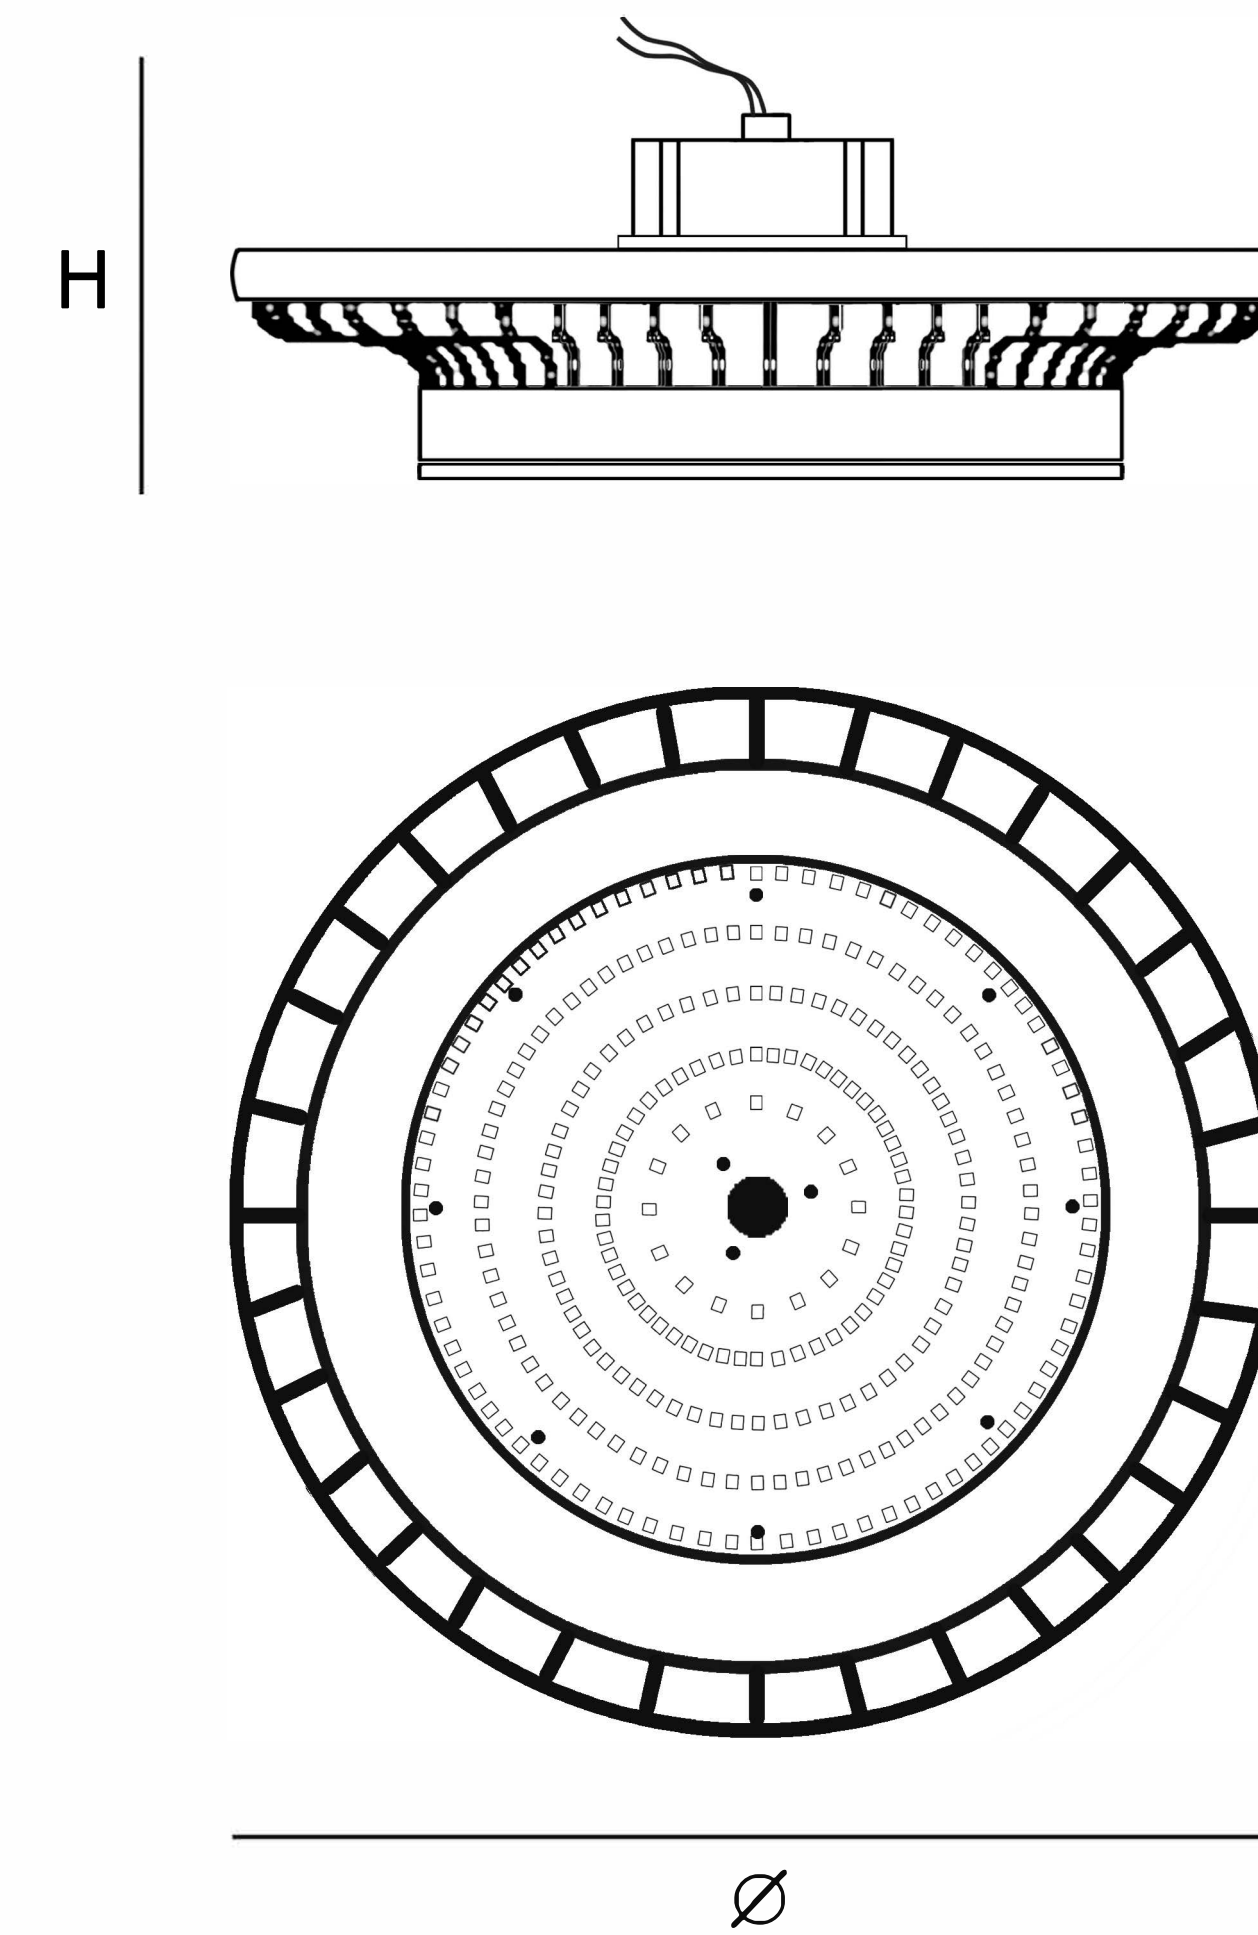

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

