

# Adjustable Surface Downlight

SLT-5554



## PERFORMANCE DATA

**Efficacy :** 130 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 24°

**Class :** II

## MECHANICAL SPECIFICATIONS

**Material :** Die Cast Aluminium

**Mounting :** Adjustable Surface mounted


**Lens :** Acrylic

**Finish :** White



**Protection Class :** IP 44

**Mechanical Resistance :** IK 08

## OPTICS

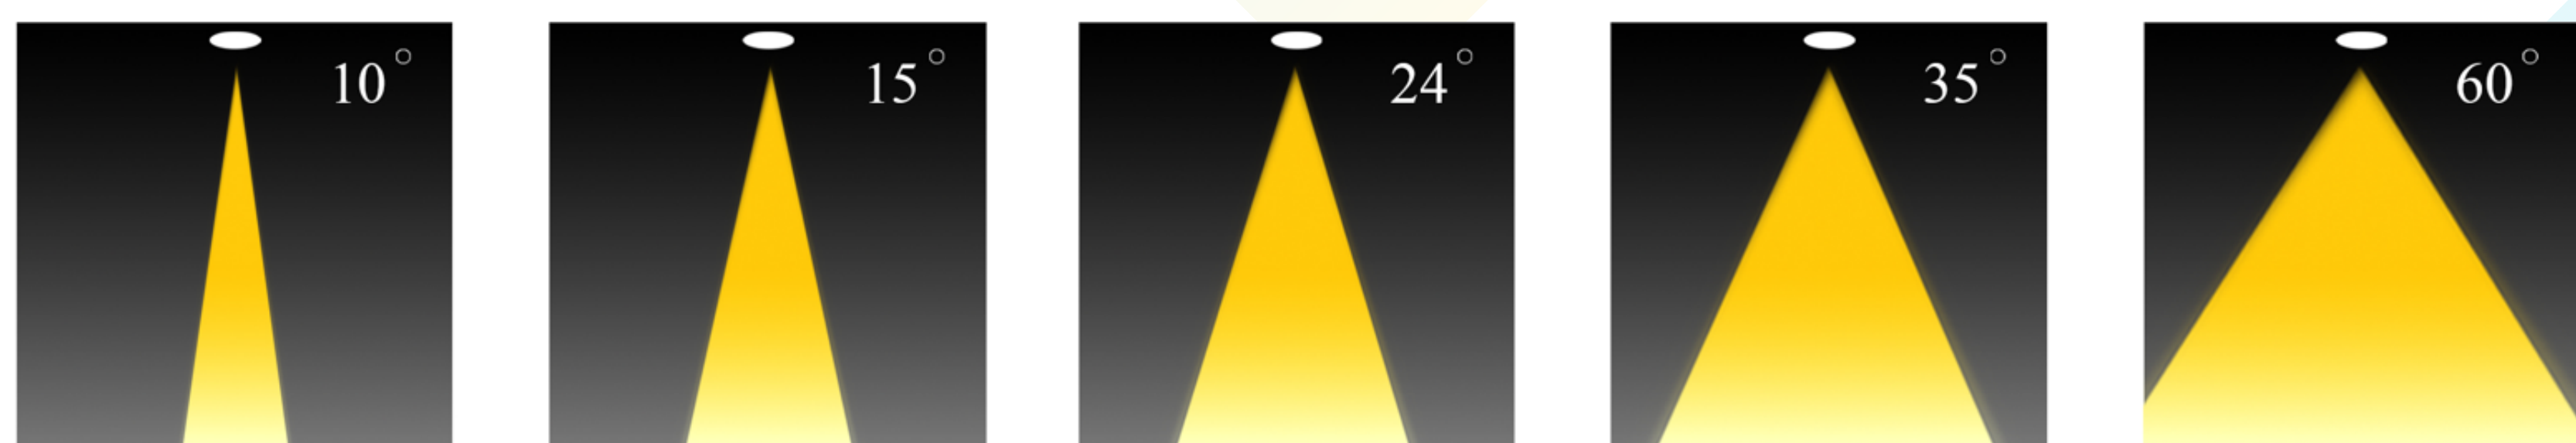

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø×Hmm	Driver	LED Chip	Weight
5541XX8024OTXXX	10 14	130	3000 4000 6500	72×108 mm	Tridonic	Osram	0.350

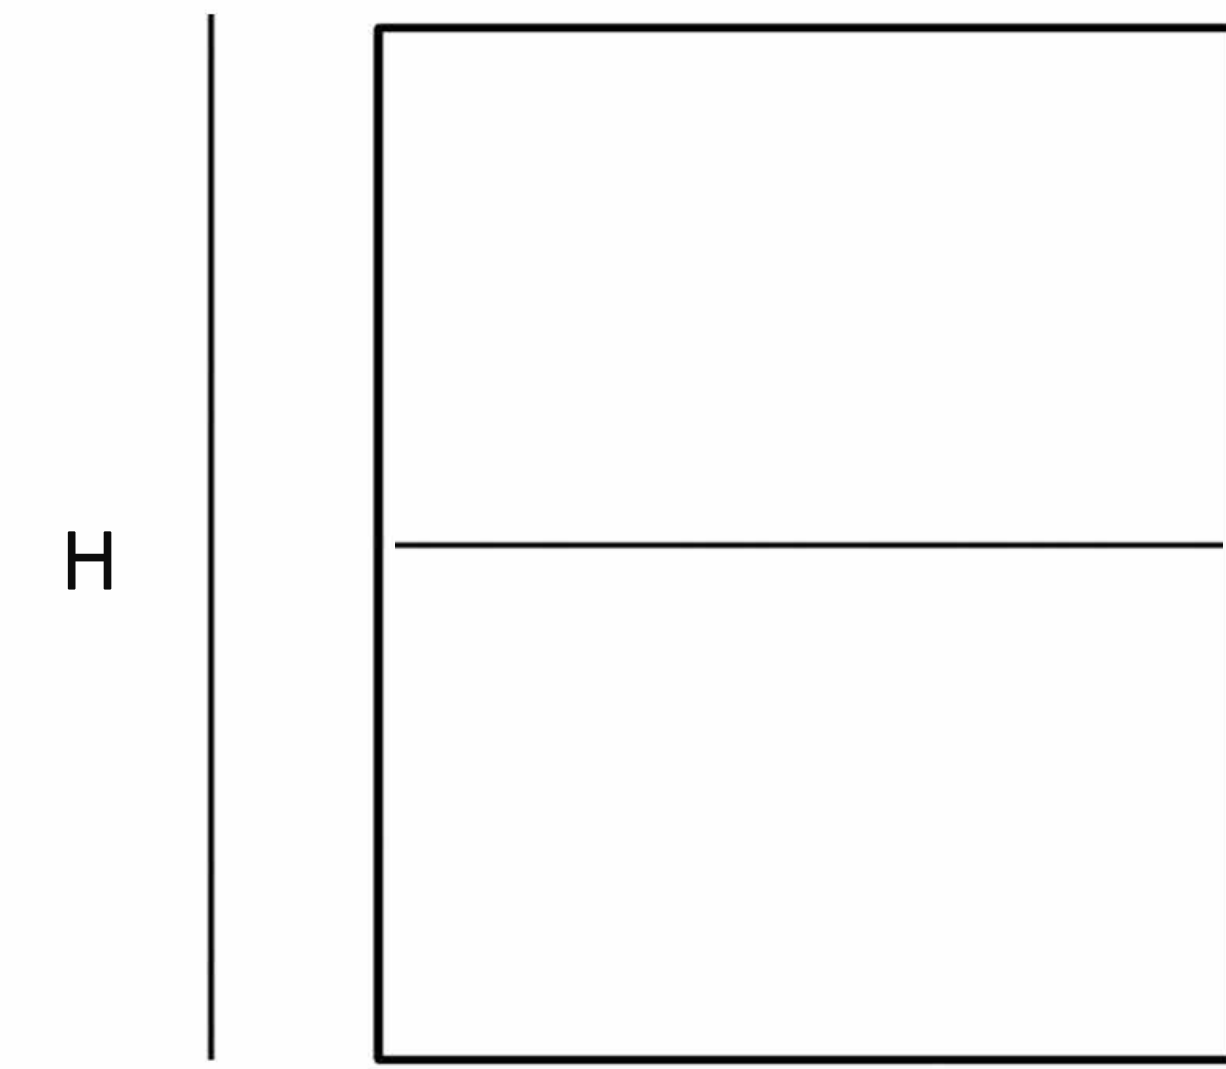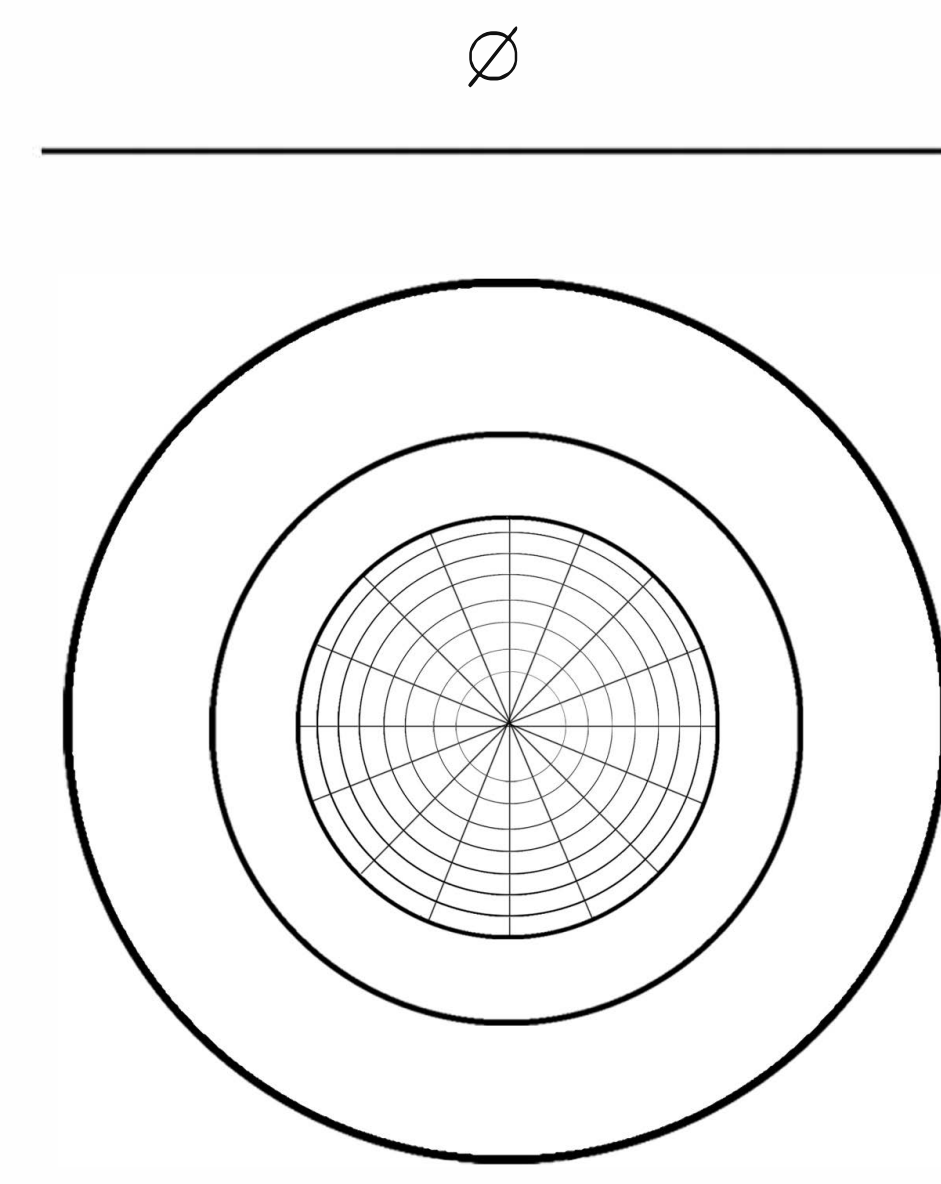

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

