

Surface Downlight

SLT-5555



PERFORMANCE DATA

Efficacy : 120 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 35°

Class : II

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium

Mounting : Surface mounted



Lens : Glass

Finish : White


Protection Class : IP 54

Mechanical Resistance : IK 08

OPTICS

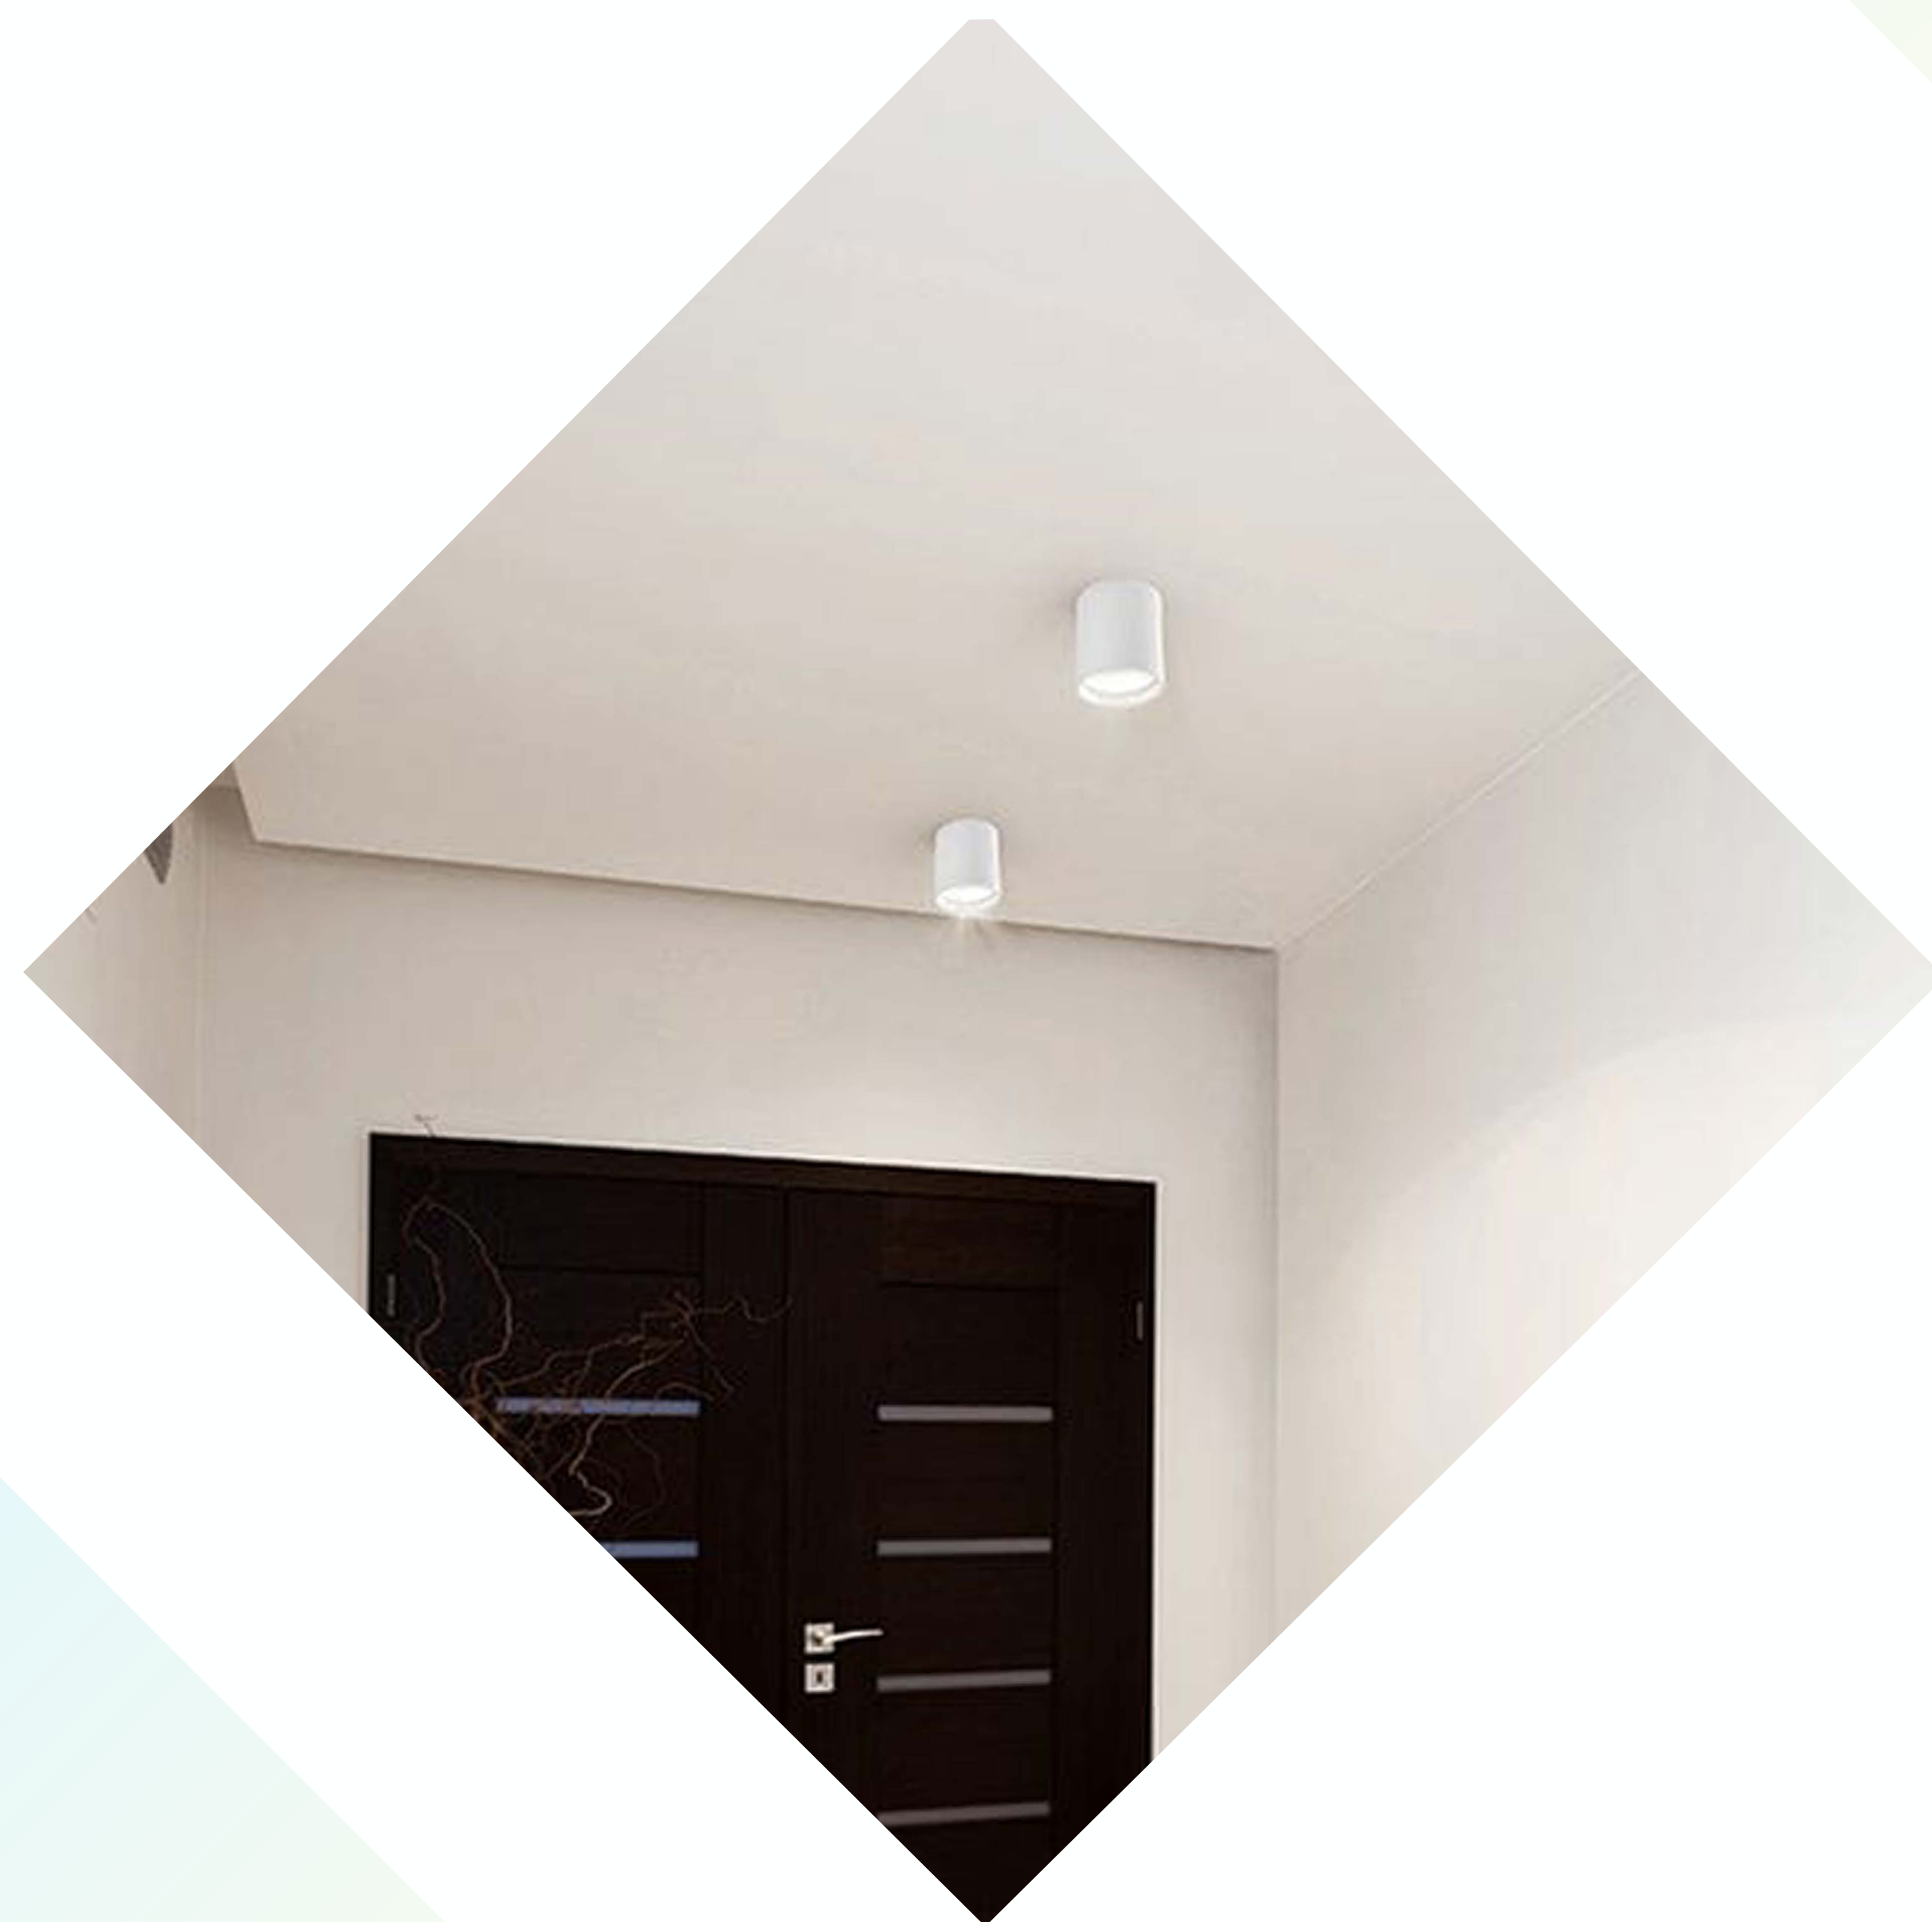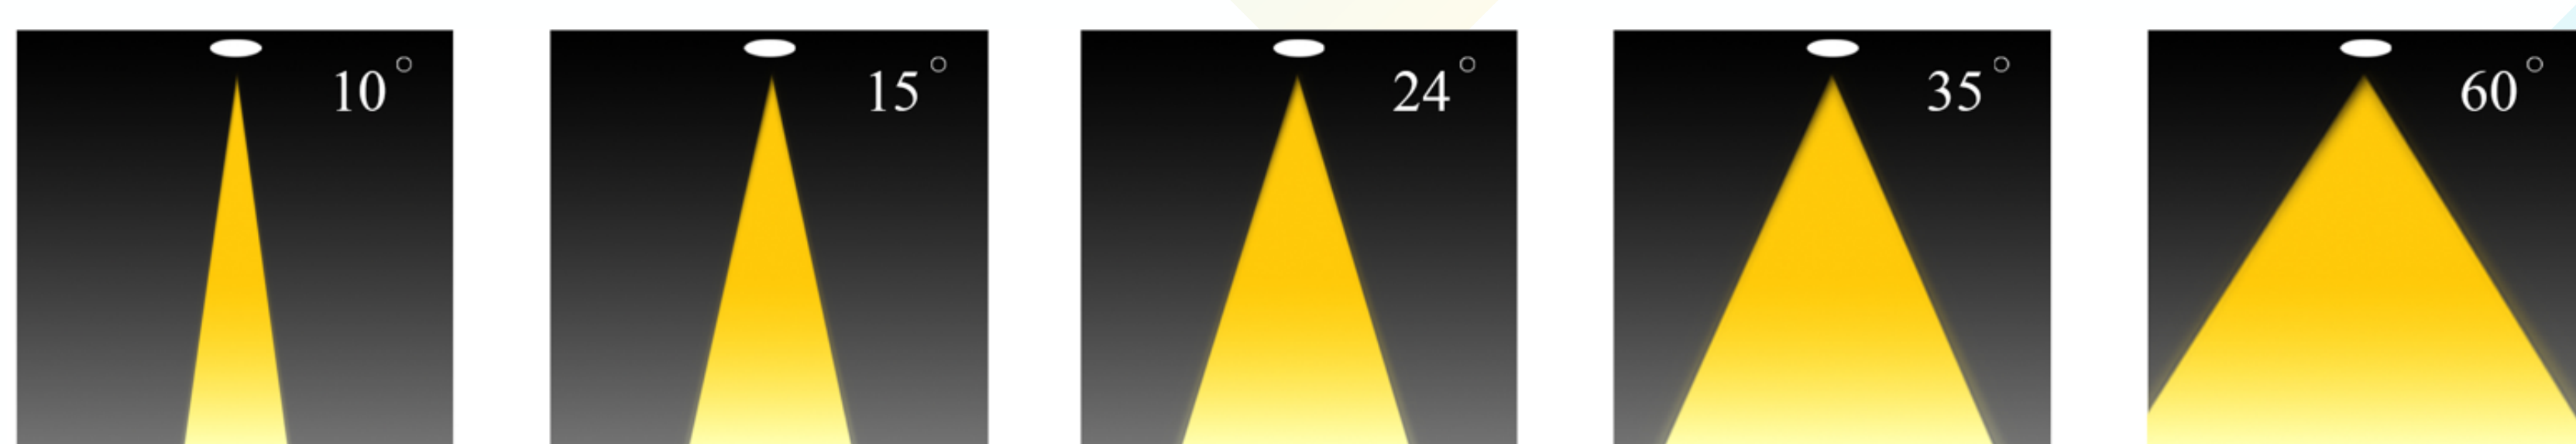

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ mm	Driver	LED Chip	Weight
5551XX8XXXCXXXX	24 30	120	3000 4000 6500	195 mm	Tridonic Lifud	Cree	

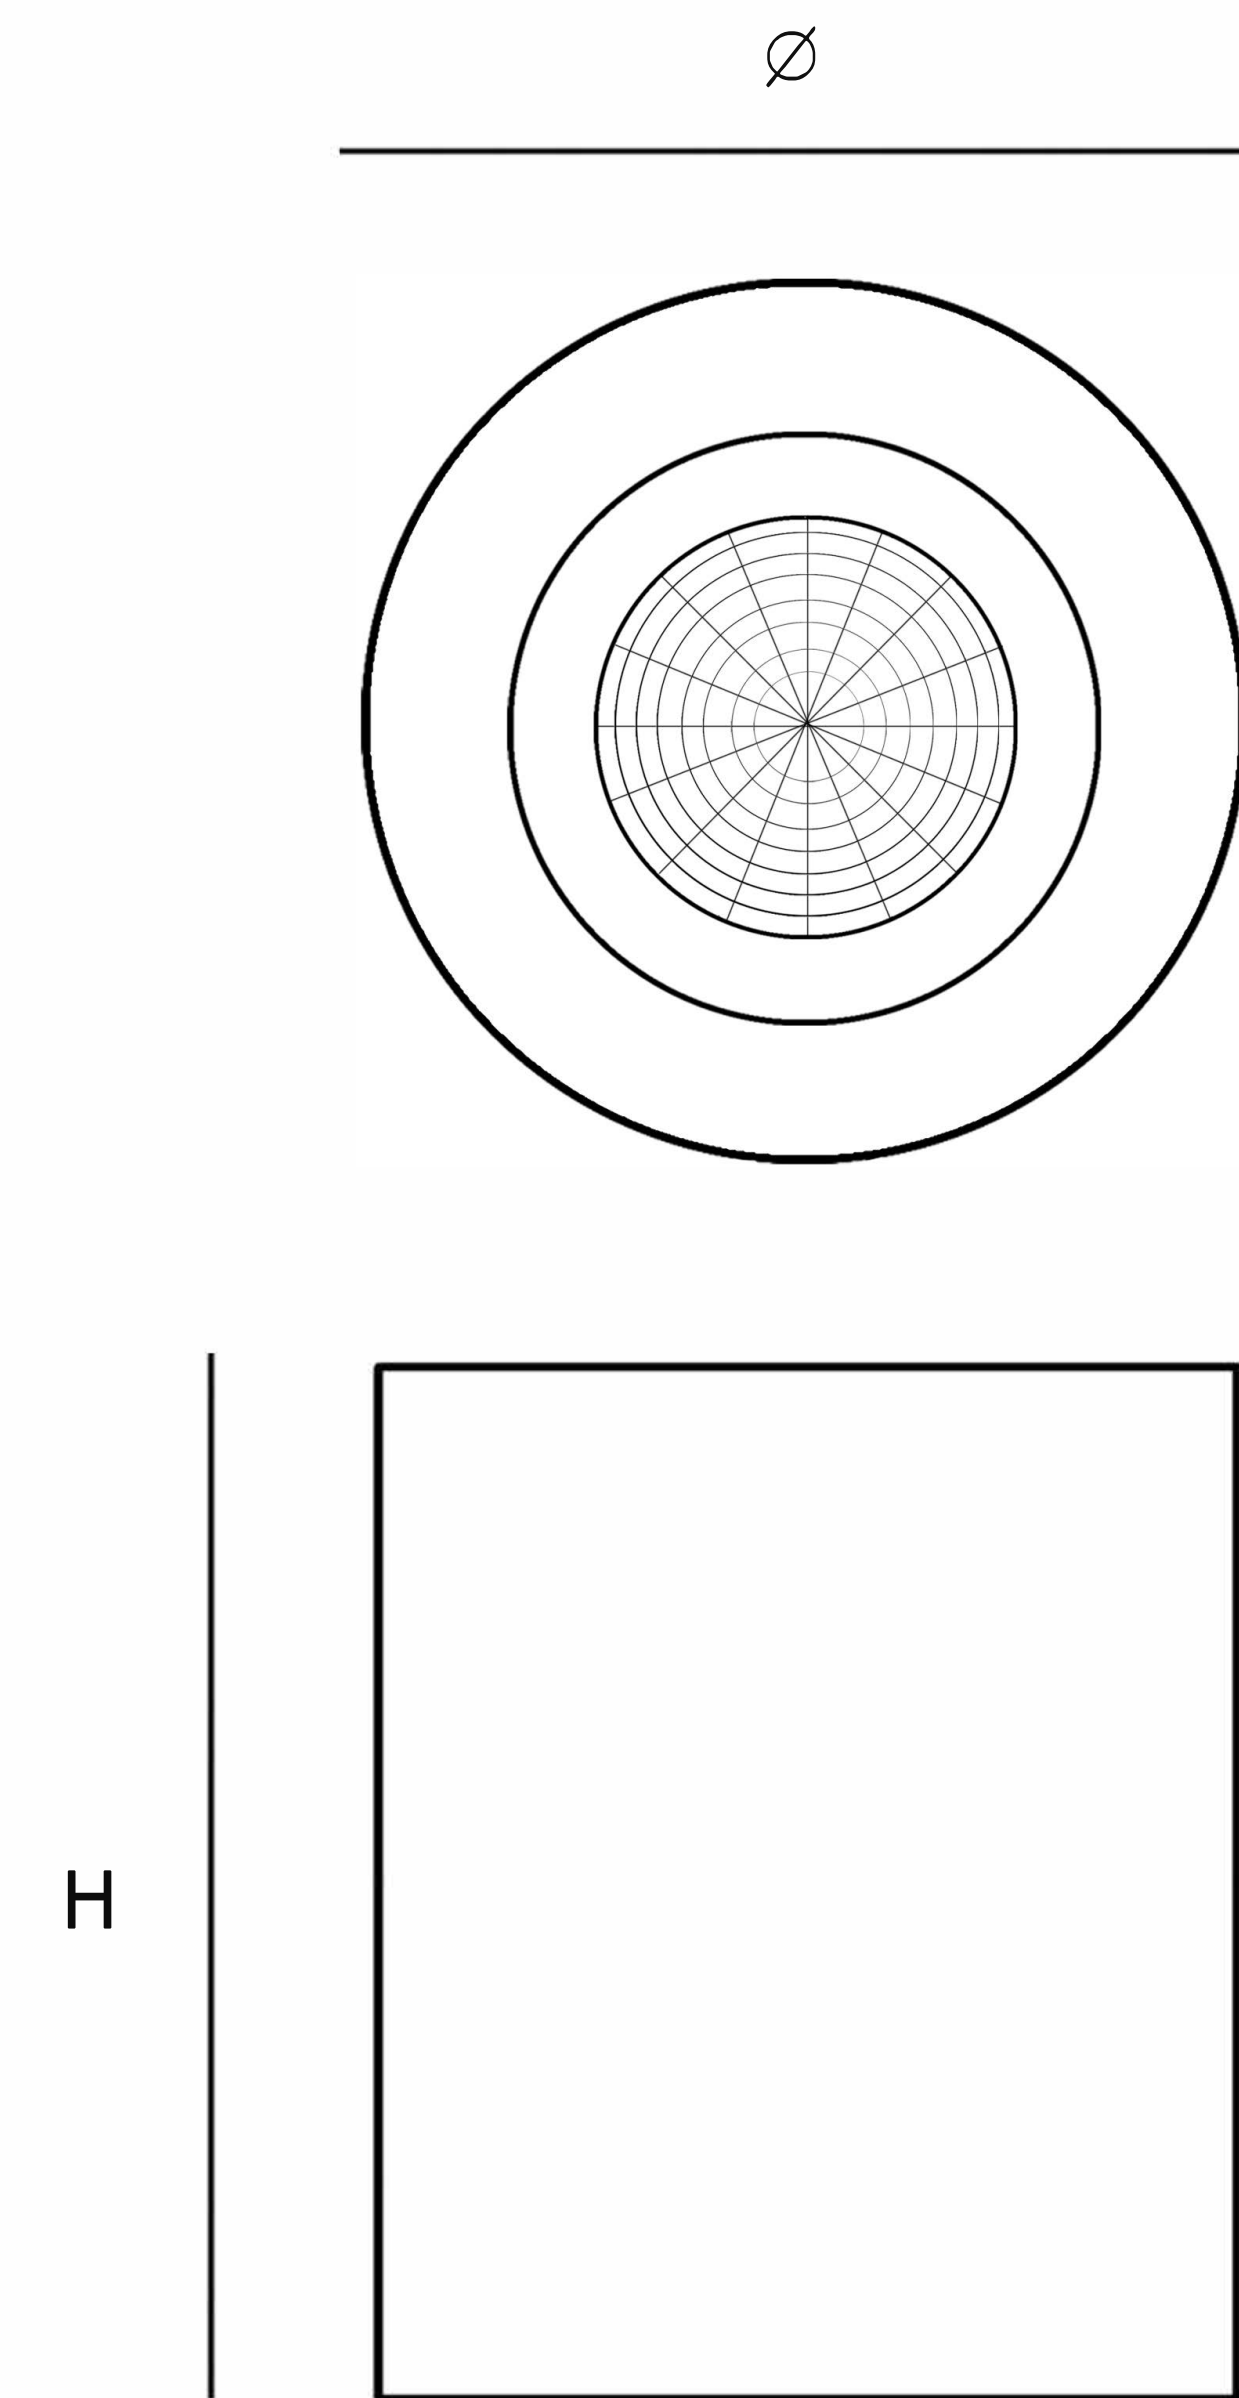

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

