

# Downlight

SLT-5555



## PERFORMANCE DATA

**Efficacy :** 90 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K-4000K-6500K

**Life Time :** 50000 hrs

**OPTIC :**

**Class :** II

## MECHANICAL SPECIFICATIONS

**Material :** Die Cast Aluminium"

**Mounting :** Surface mounted"



**Lens :** Glass

**Finish :** White



**Protection Class :** IP 54"

**Mechanical Resistance :** IK 08

## OPTICS

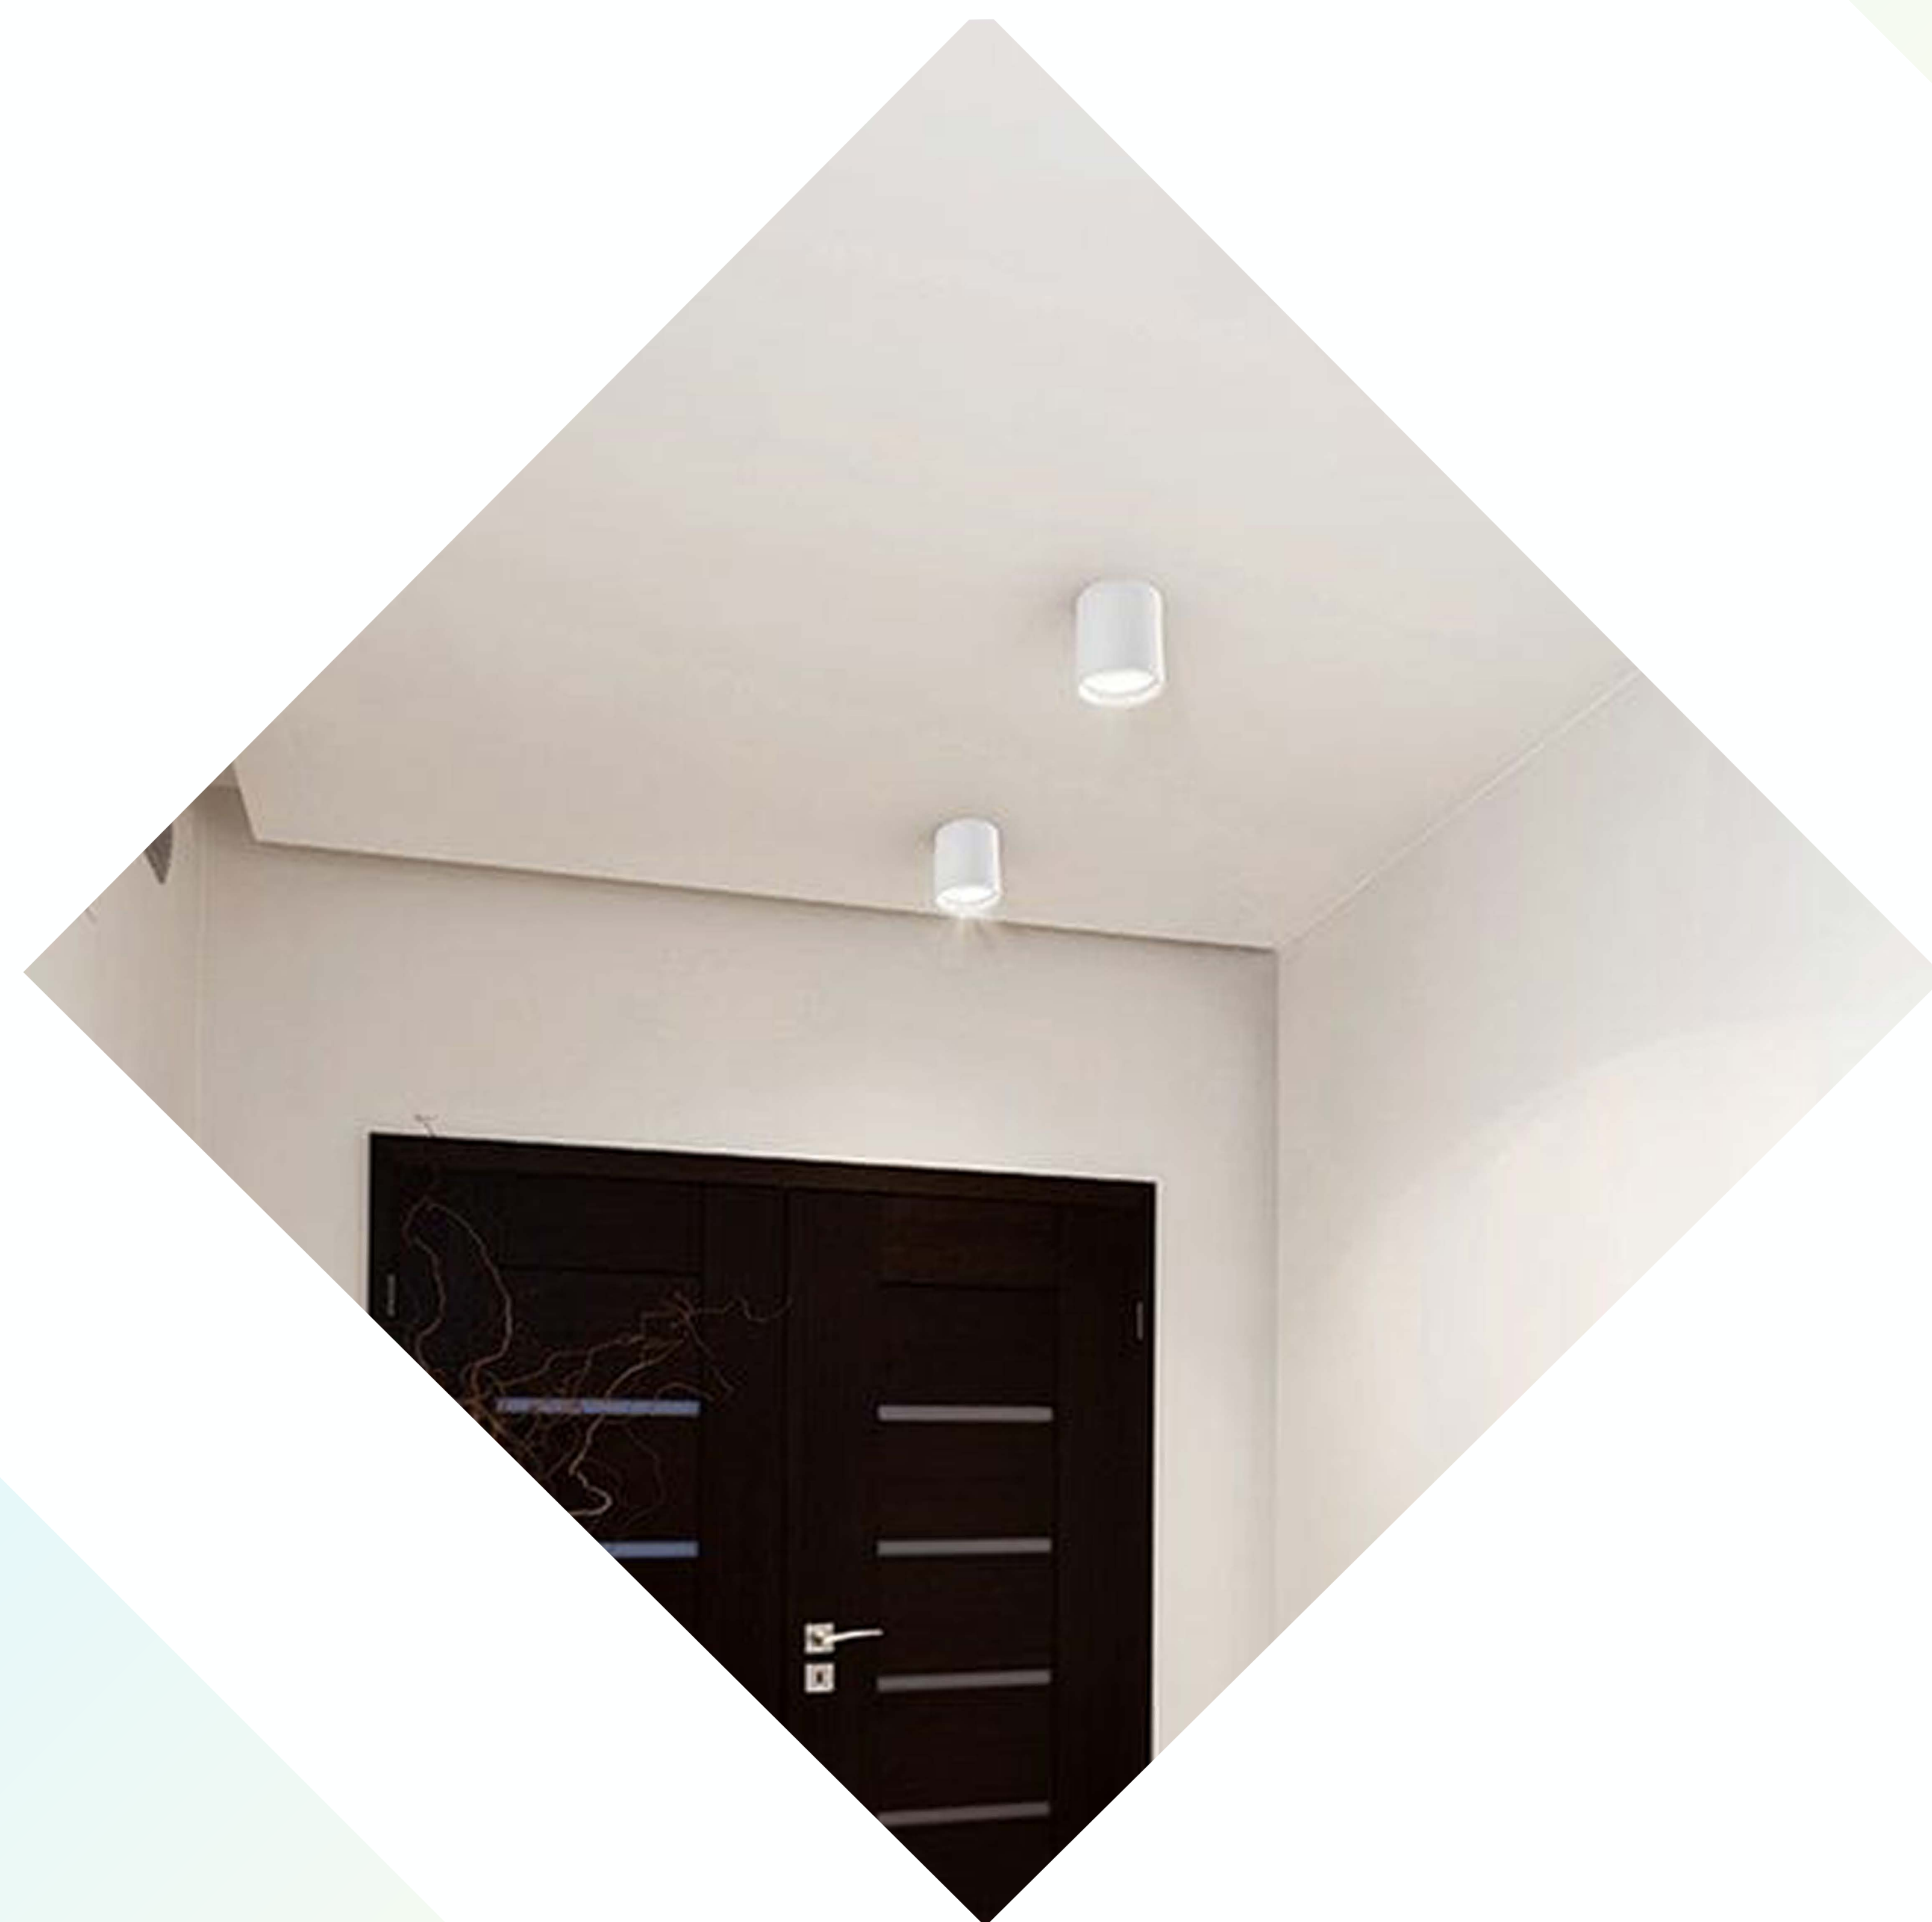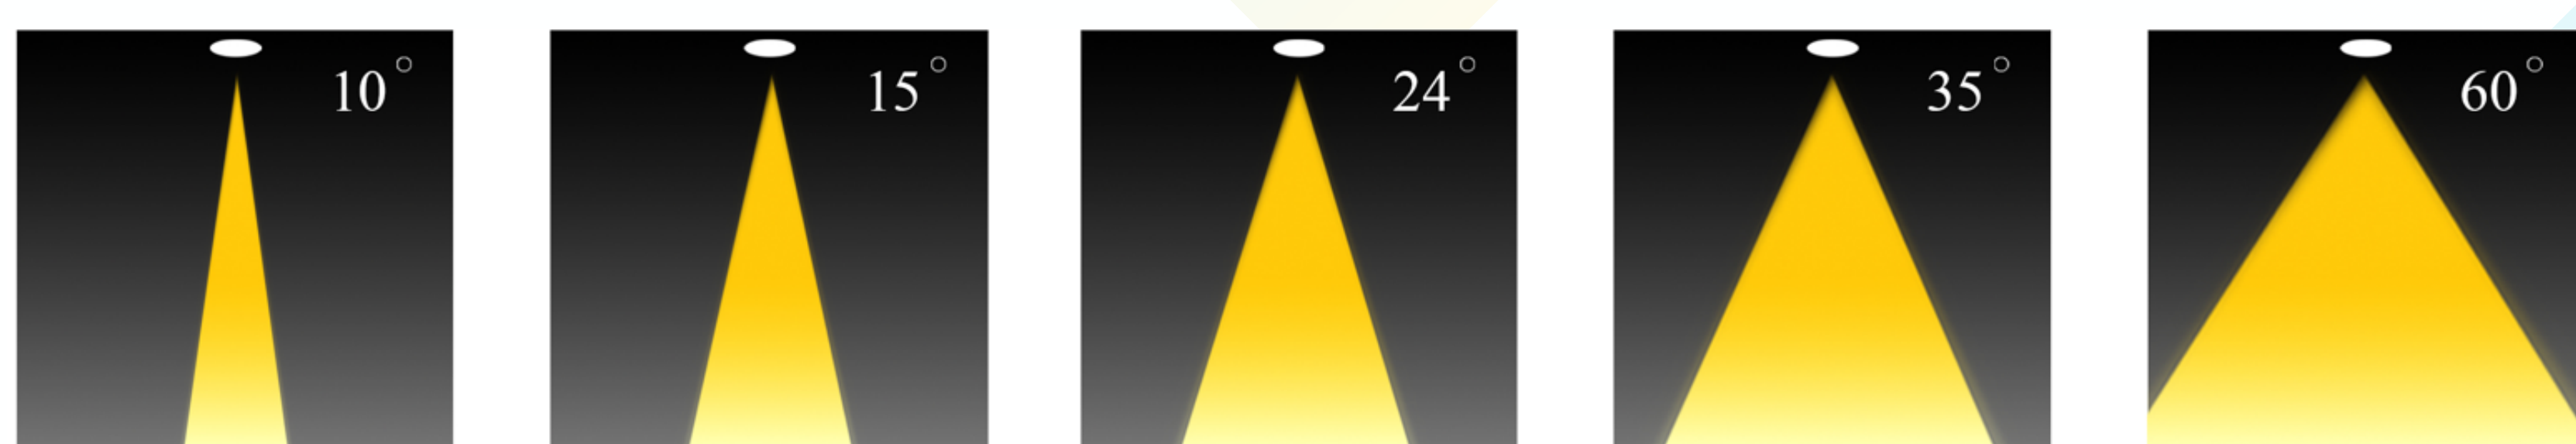

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ mm	Driver	LED Chip	Weight
5551XX8XXXCXXXX	24 30	90	3000 4000 6500	195 mm	Tridonic Lifud	Cree	

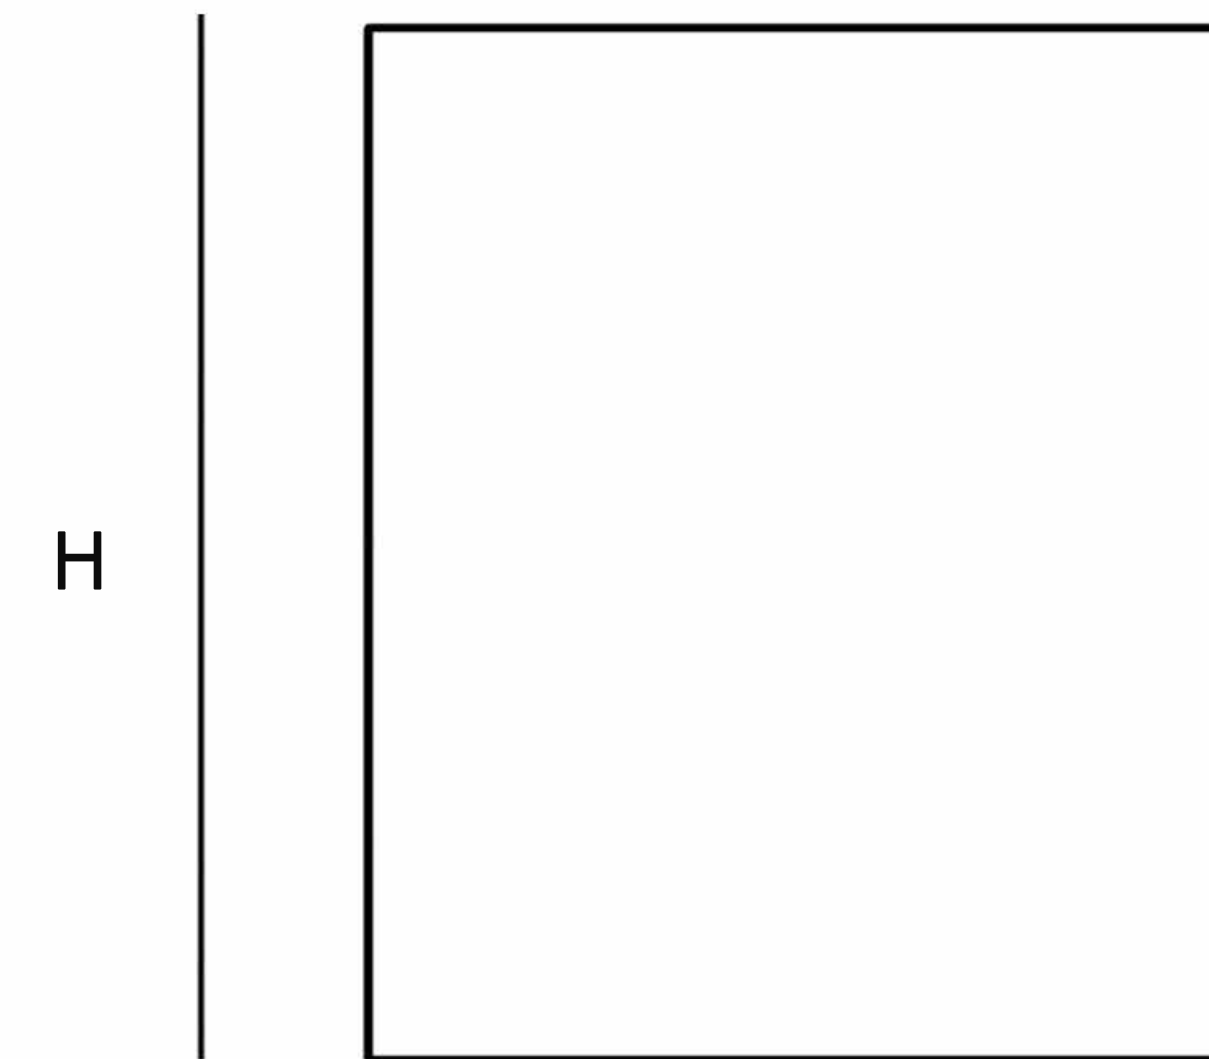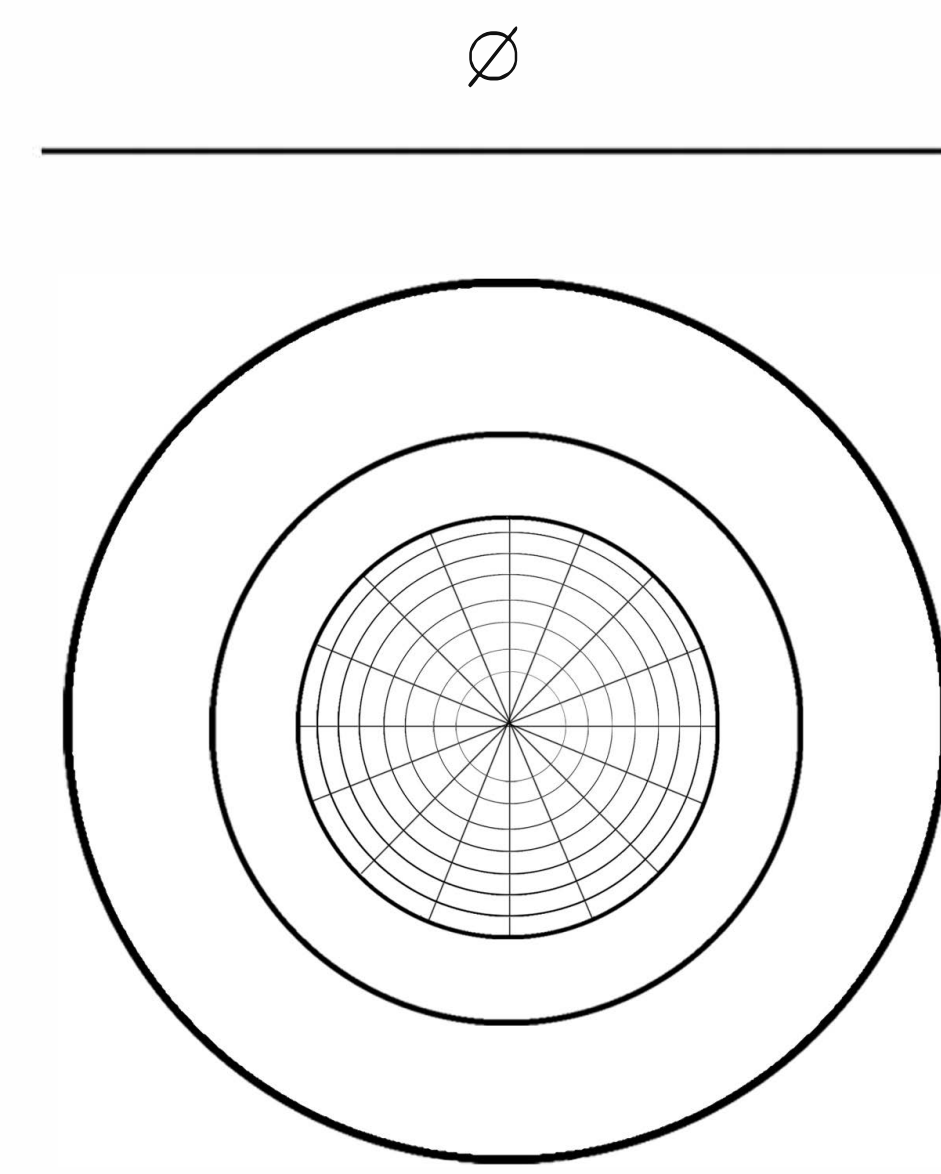

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

