

# Surface Downlight

SLT-5556



## PERFORMANCE DATA

**Efficacy :** 120 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 24°

**Class :** II

## MECHANICAL SPECIFICATIONS

**Material :** Die Cast Aluminium

**Mounting :** Surface mounted



**Lens :** Glass

**Finish :** White

**Protection Class :** IP 54



**Mechanical Resistance :** IK 08

## OPTICS

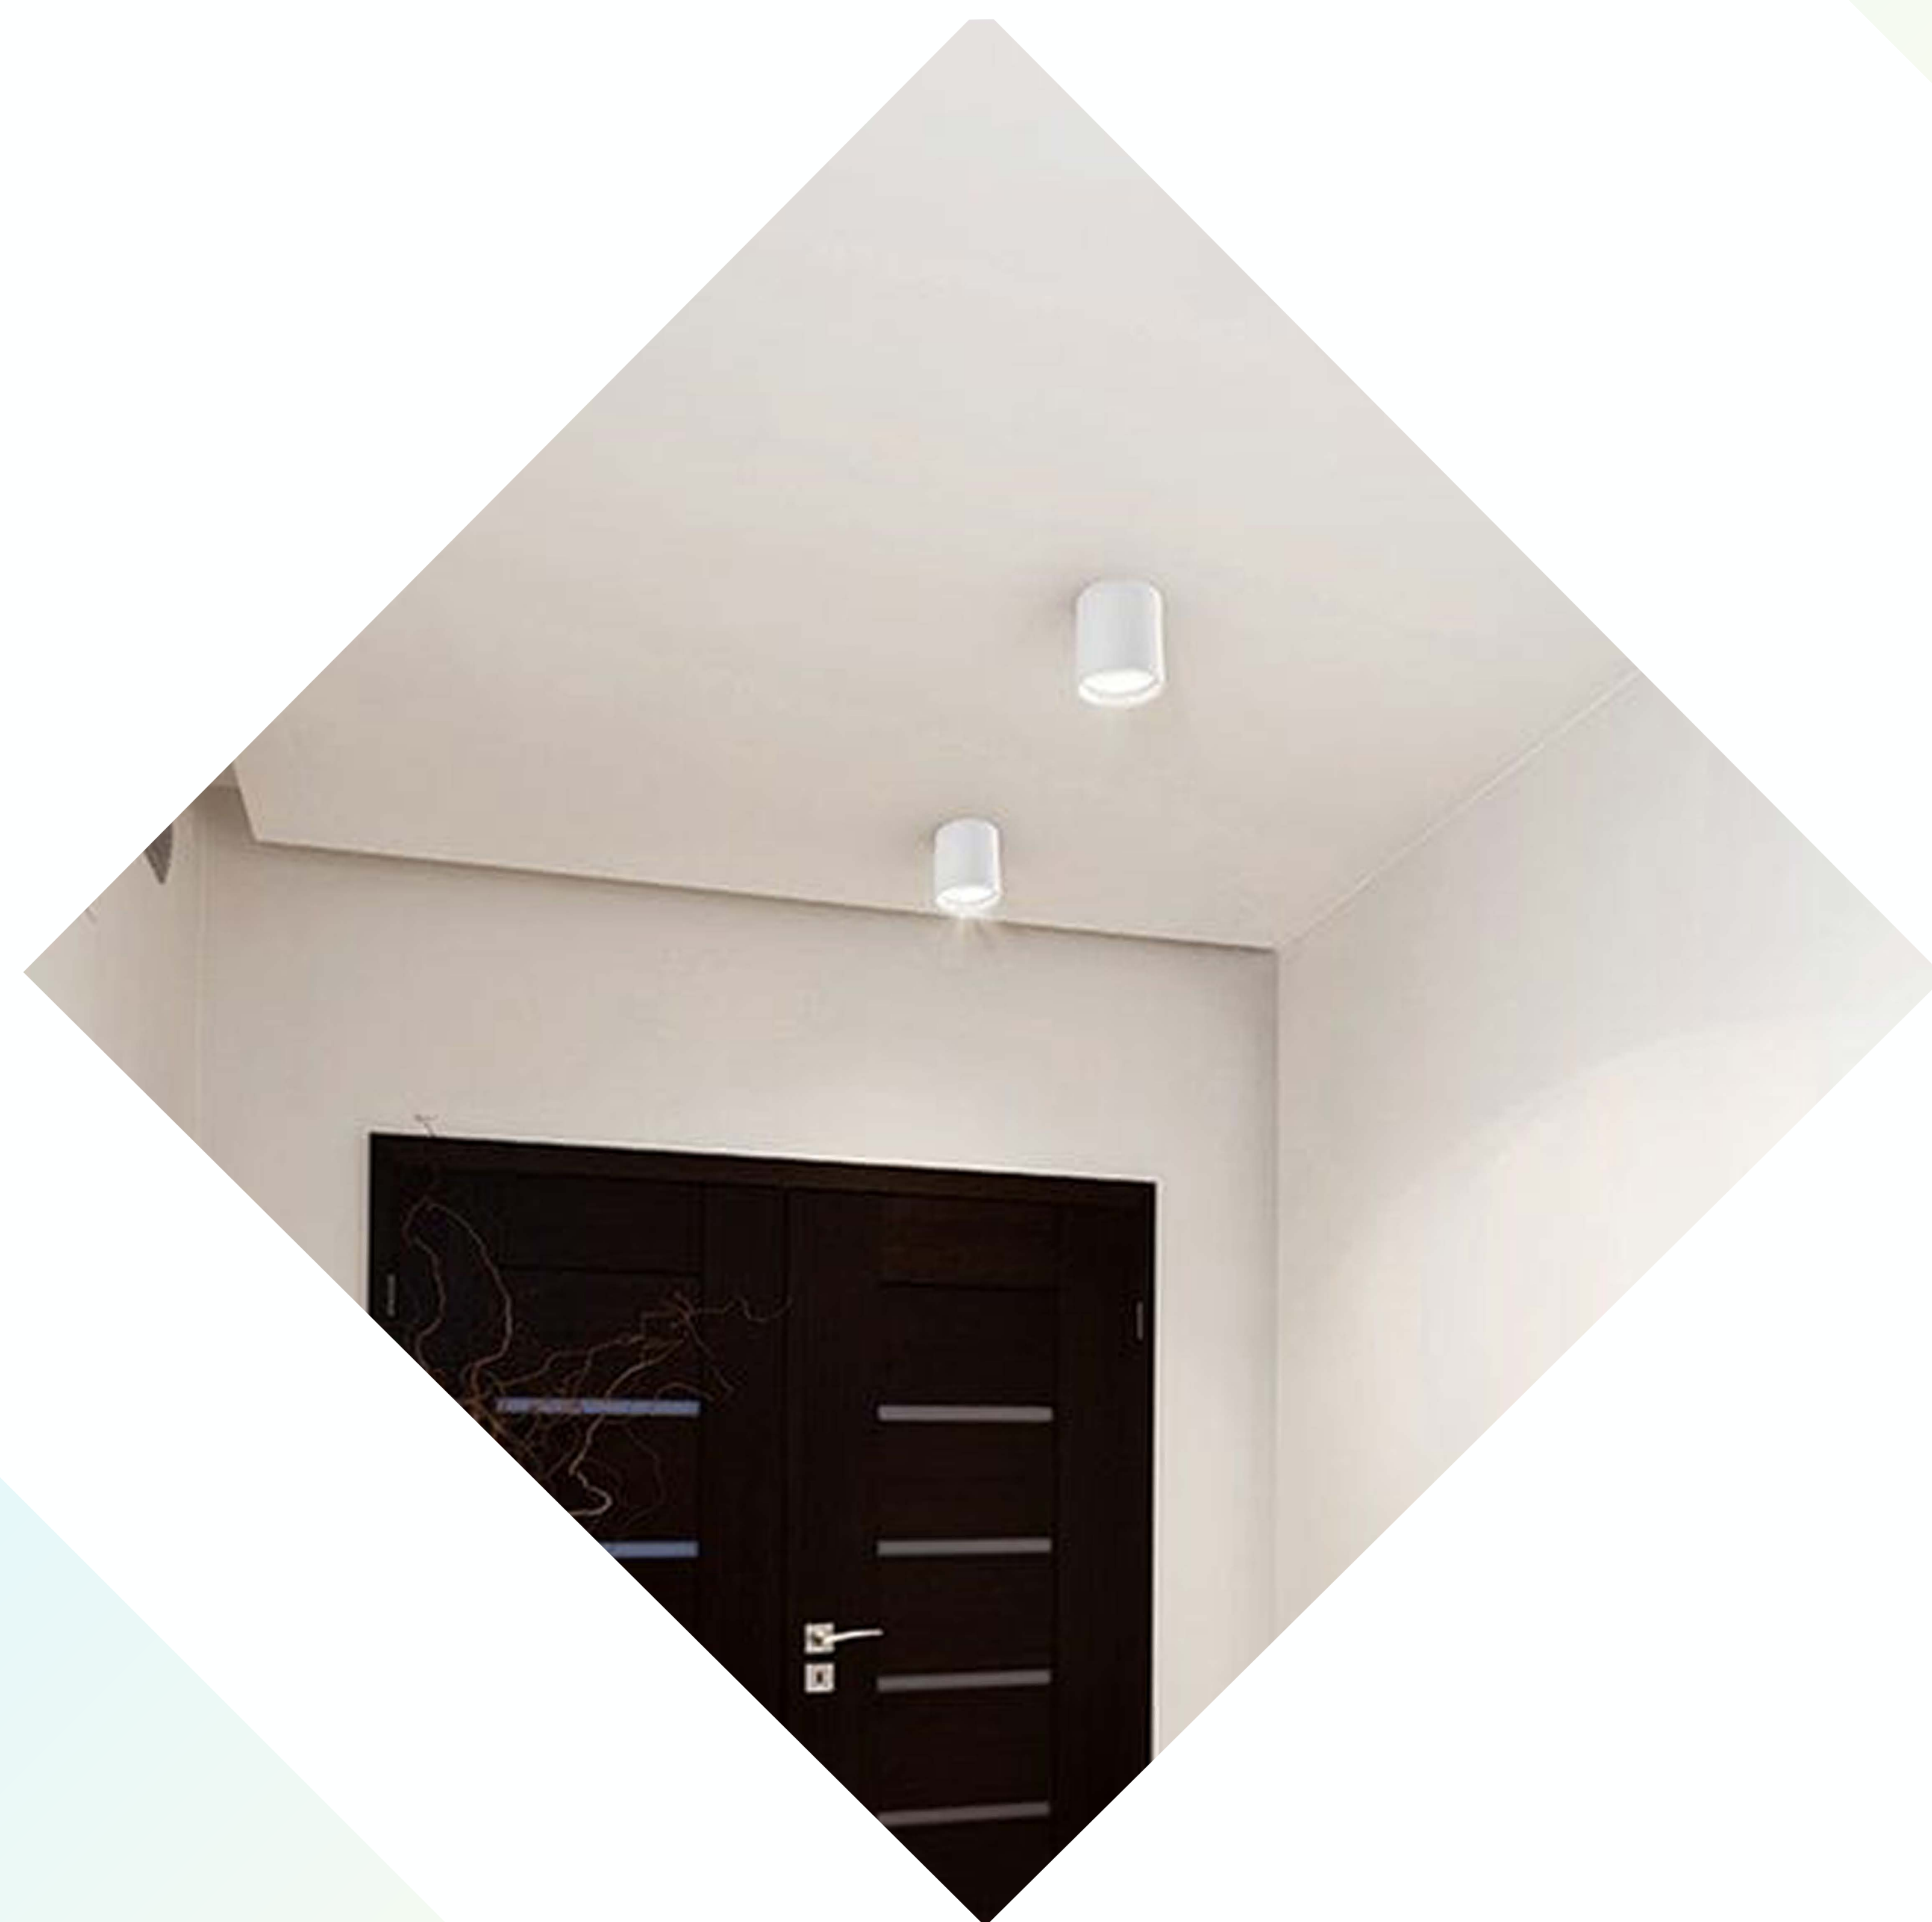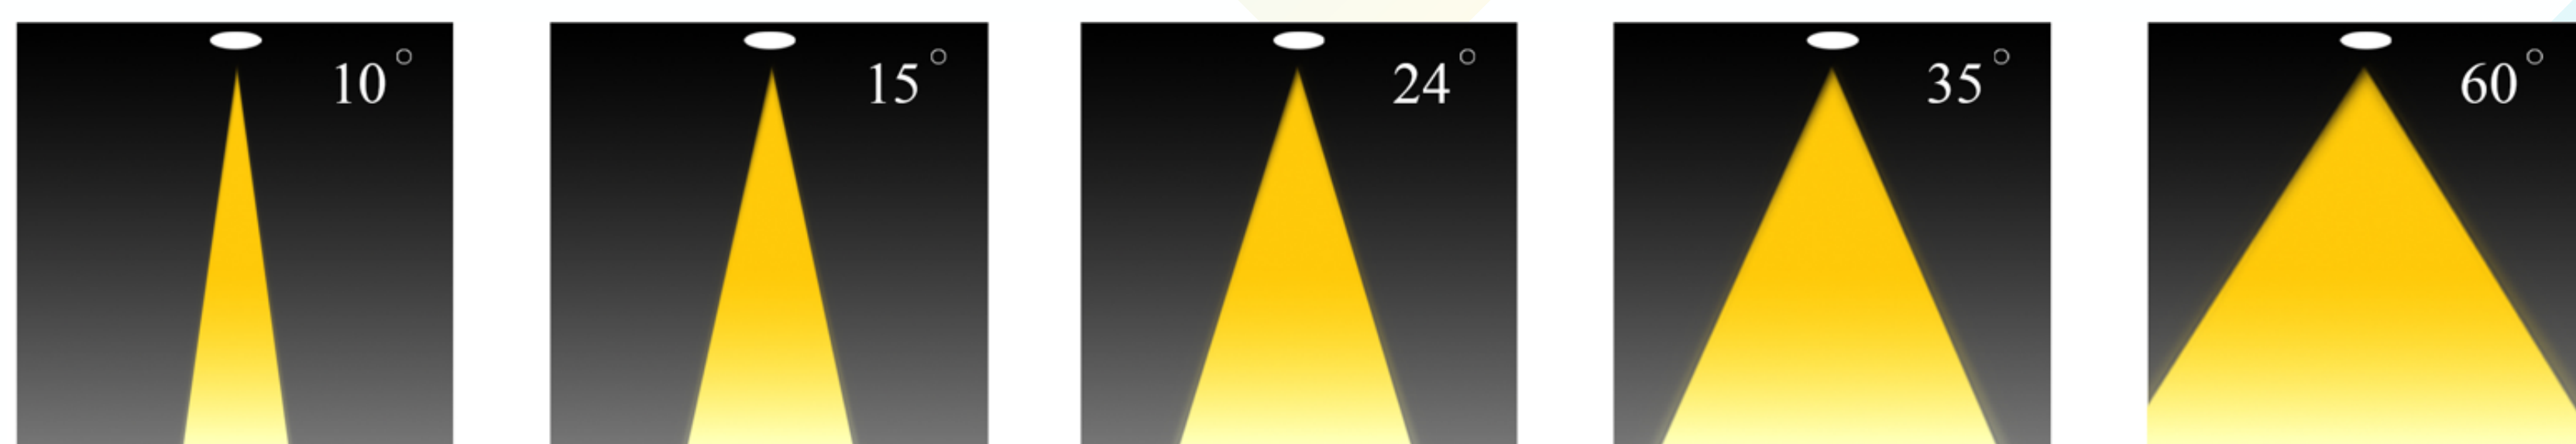



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø mm	Driver	LED Chip	Weight
5561XX8XXXCTXXX	10	120	3000	130 mm	Tridonic Lifud CE	Cree	
	14		4000				
	15		6500				

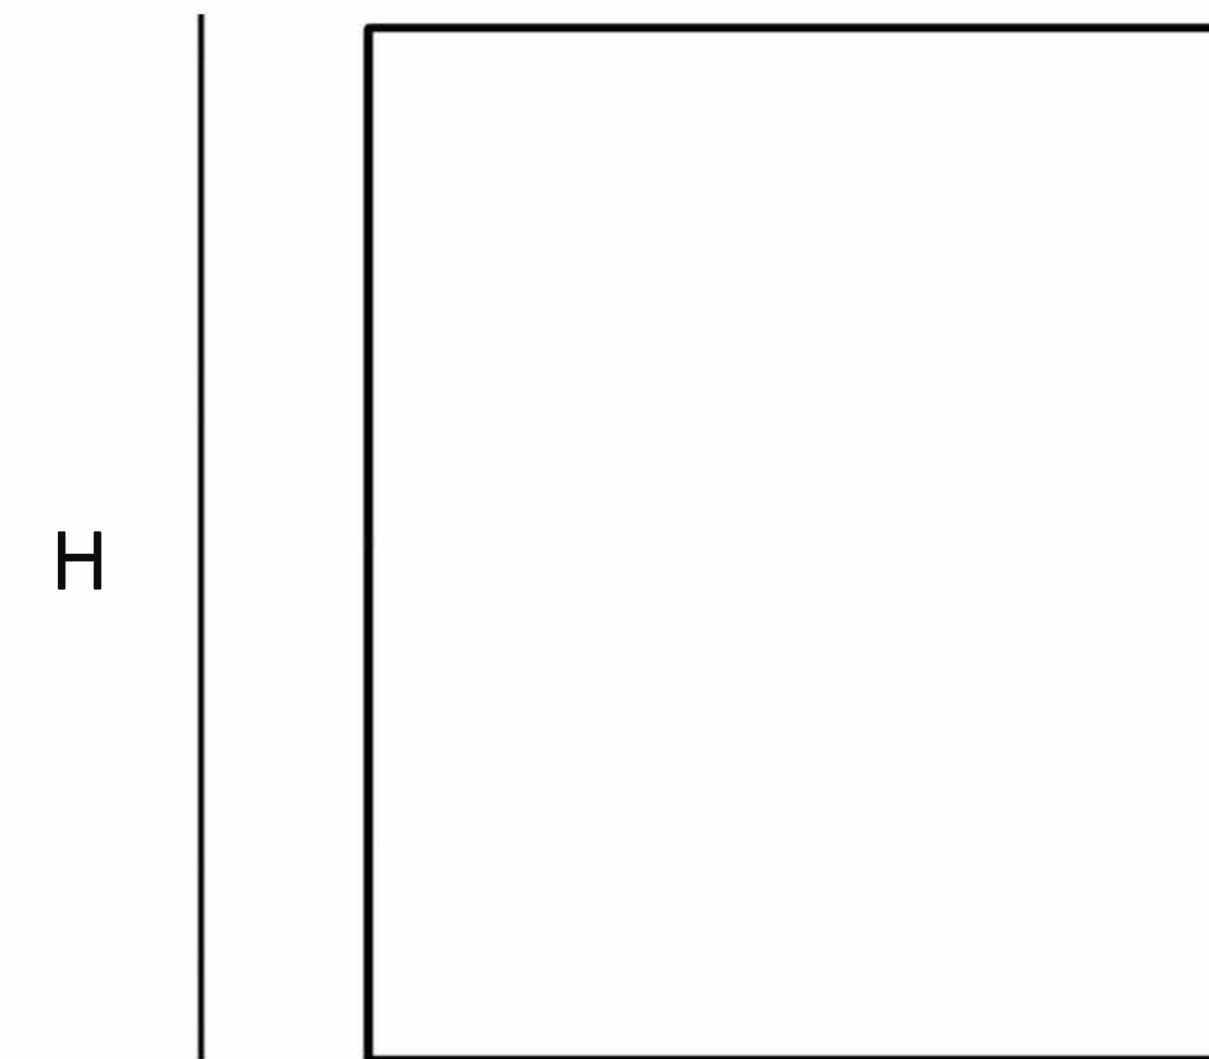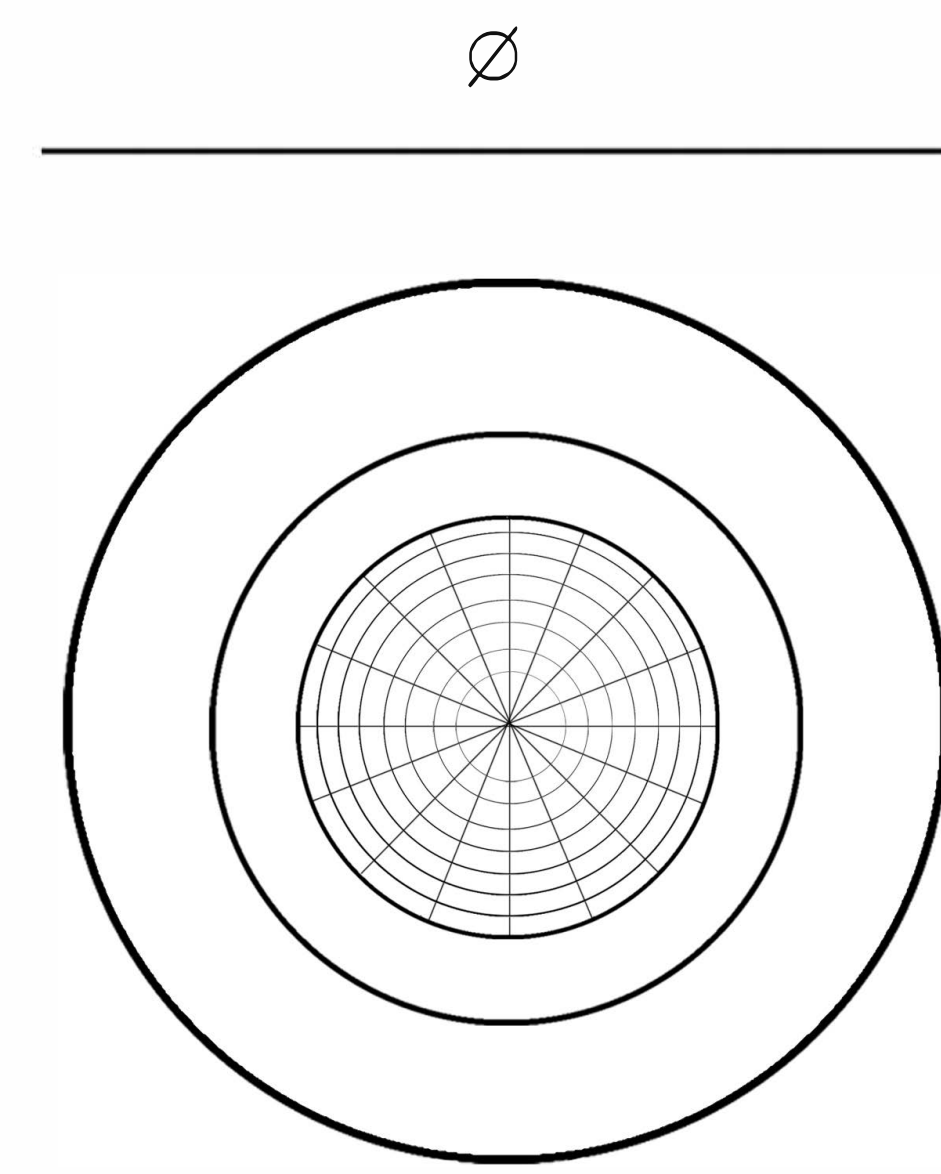

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

