

Downlight

SLT-5601



PERFORMANCE DATA

Efficacy : 125 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 38°

Class : I

CutOut : 75 mm

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium

Mounting : Recessed mounted


Lens : Glass

Finish : Black & White



Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

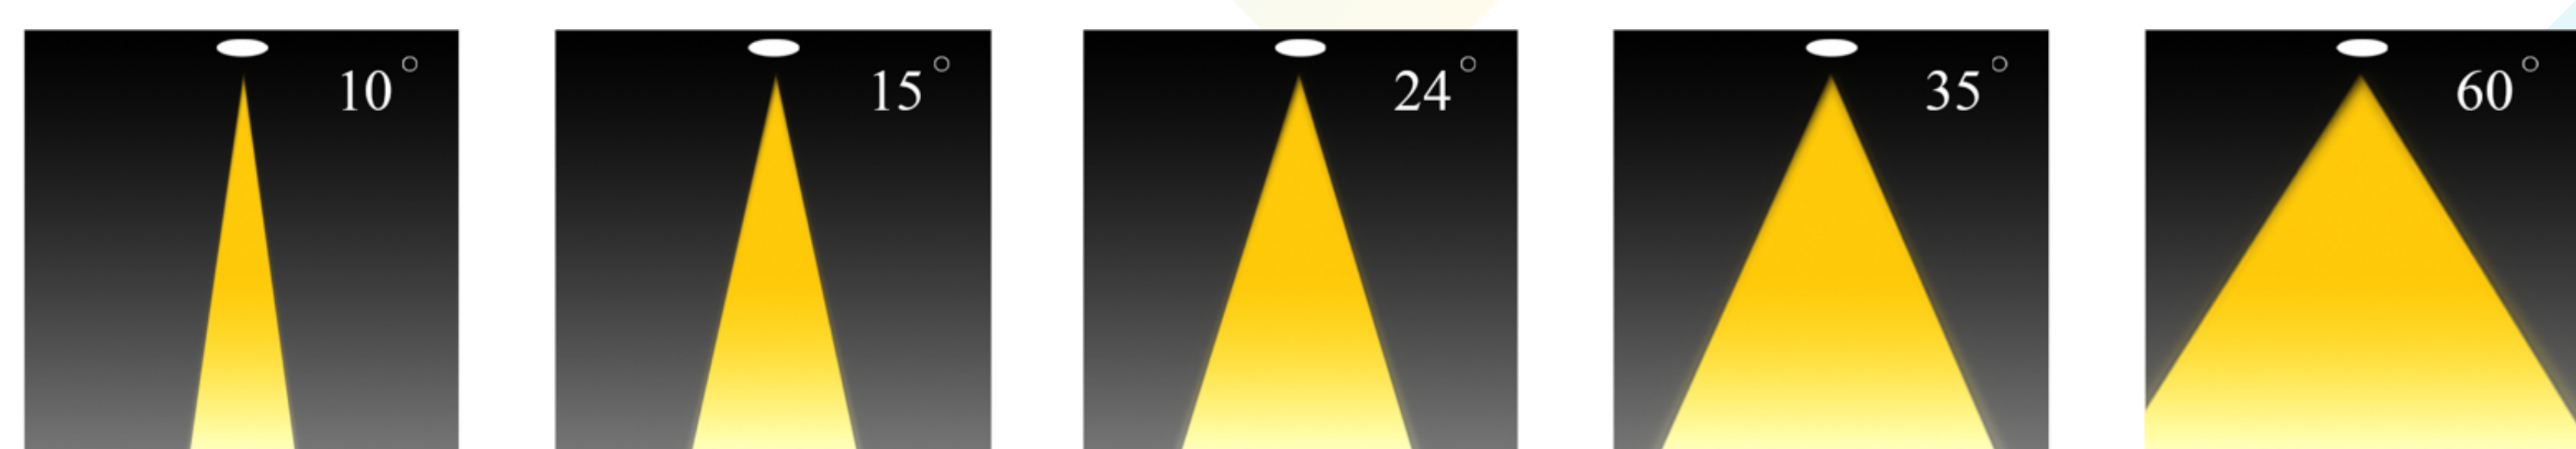

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅×B mm	Driver	LED Chip	Weight Kg
6501XX8038XXXXX	10 12 15 20 25	125	3000 4000 6000	184×60 mm	Tridonic Philips Lifud	Philips Cree VS	0.500

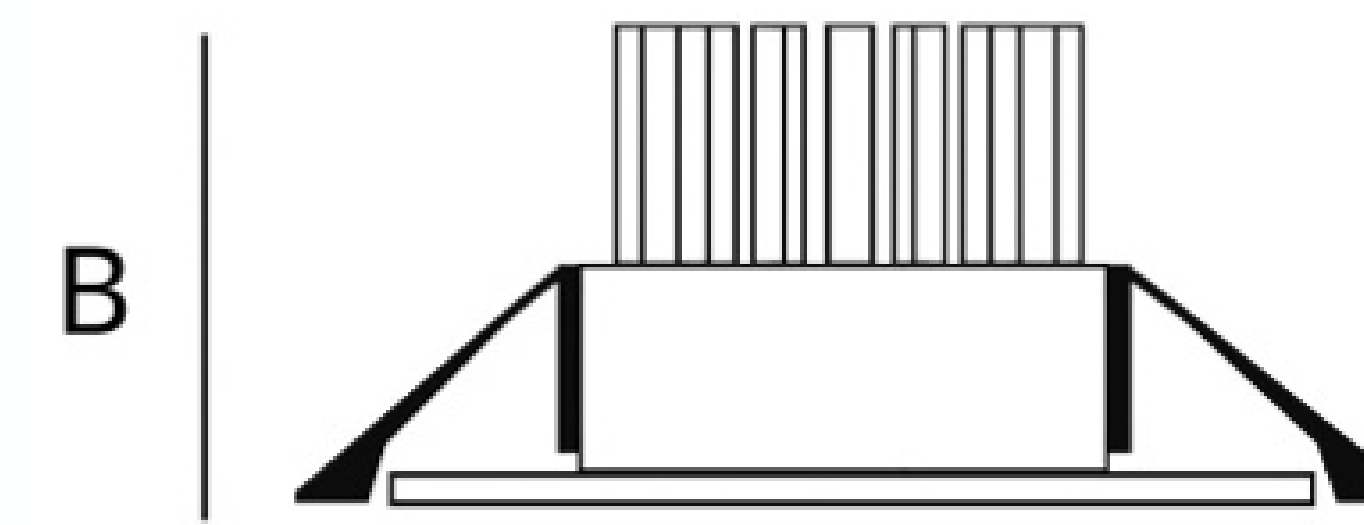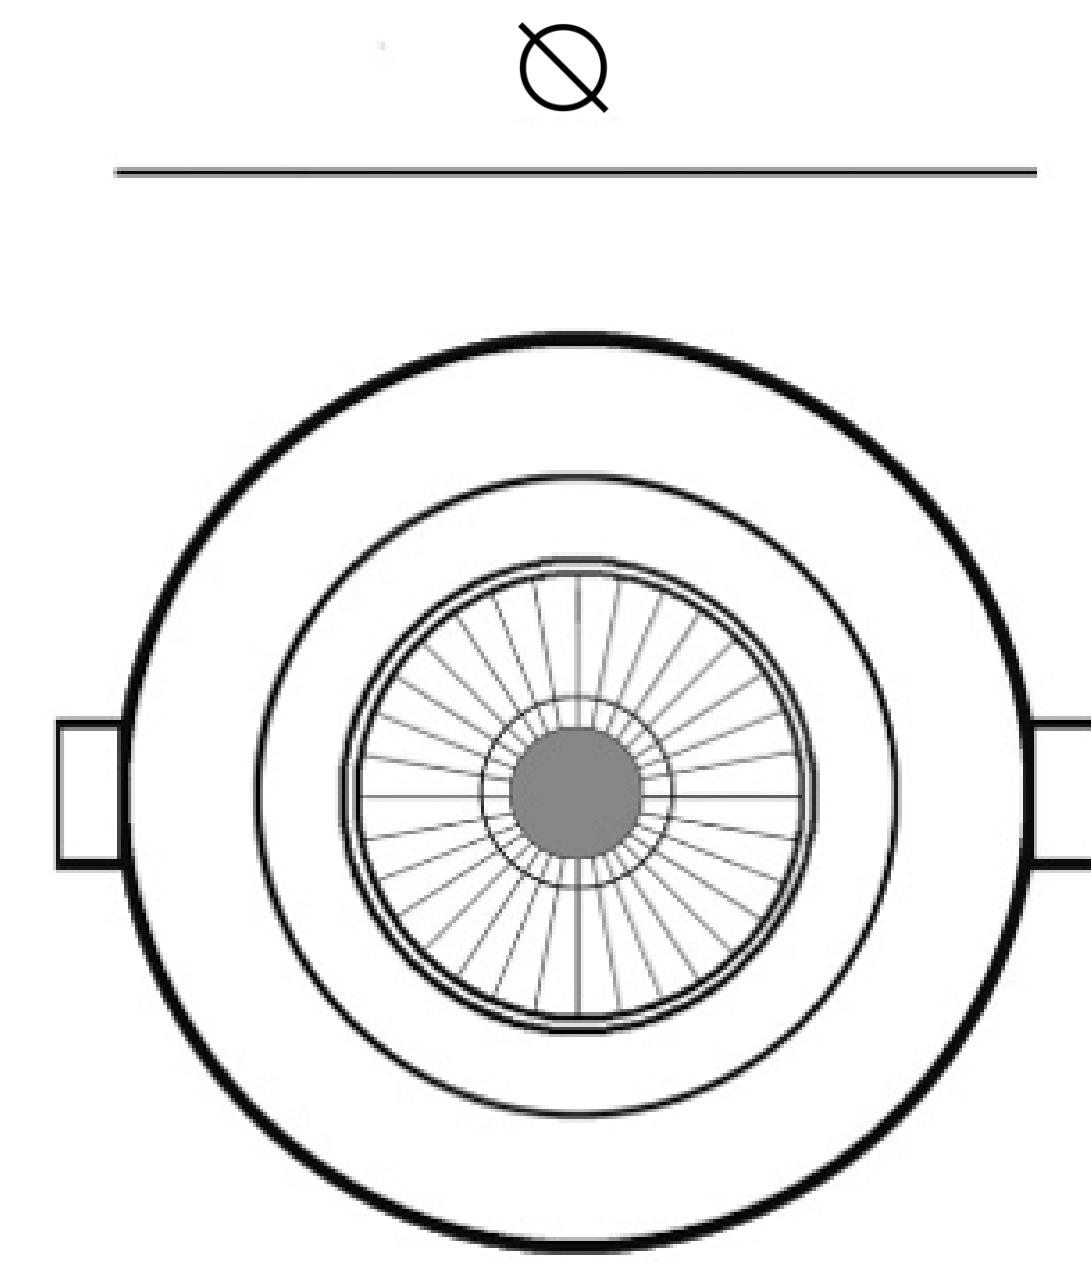

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

