


# Pole Light

SLT-6601

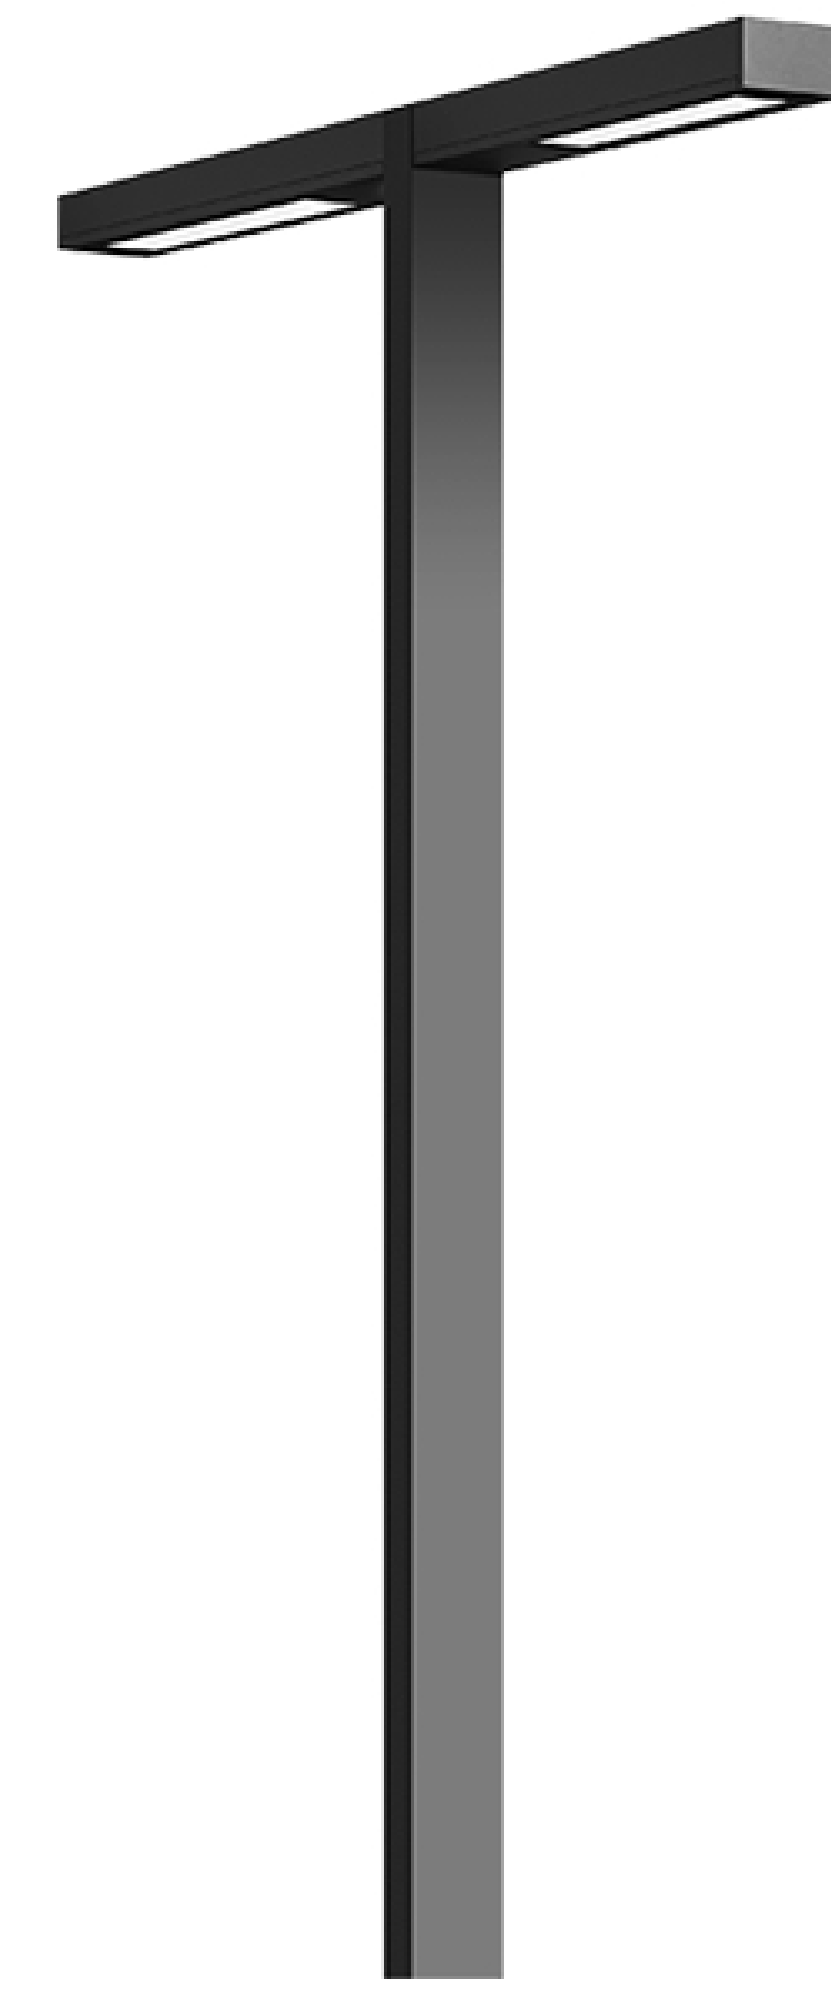

## PERFORMANCE DATA

**Efficacy :** 110 Lm/W

**Input Voltage :** 220 V

**Frequency :** 50 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K-4000K

**Life Time :** 50.000 hrs

**Optic :** 120 °

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminum

**Mounting :** Pole Mounted


**Lens :** Glass

**Finish :** Gray



**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

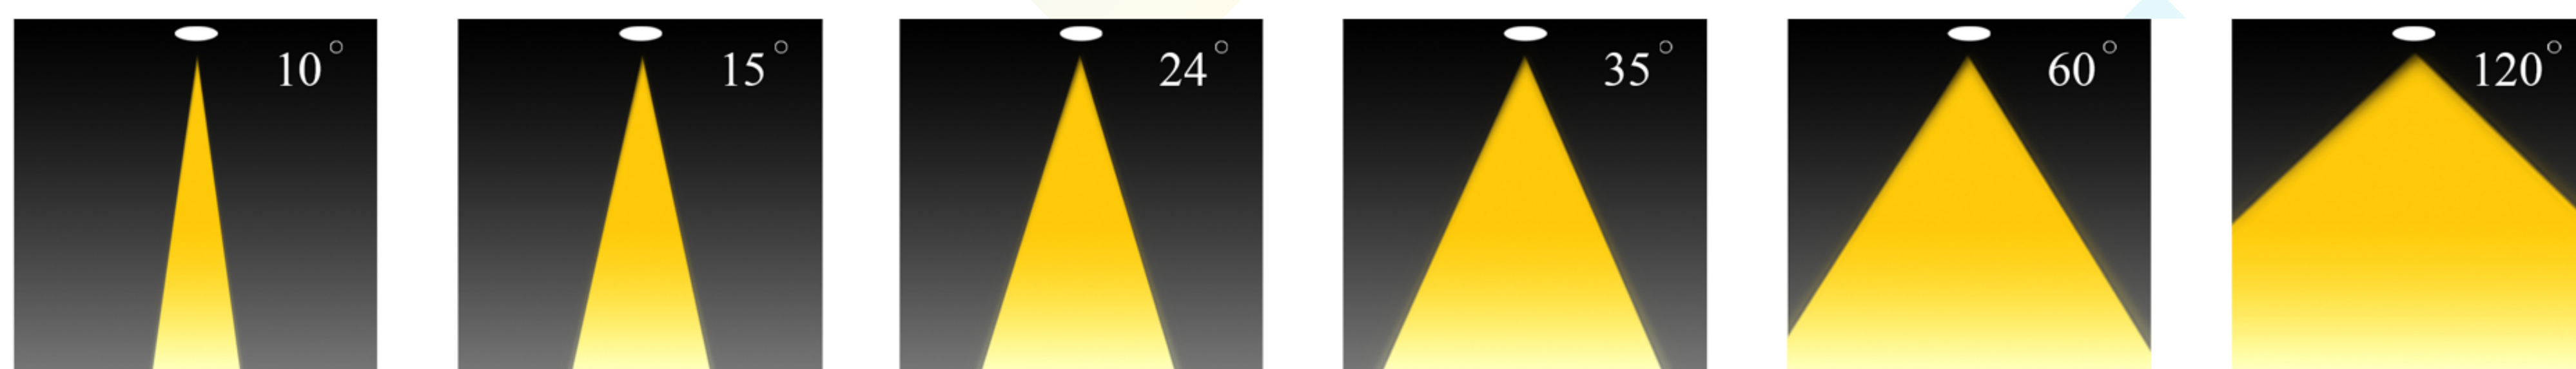

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions H mm	Driver	LED Chip
606XXX8120XXXXXXXXXX	2*40 2*50 2*60	110	3000 4000	3000 3500 6000	Eaglerise Meanwell Philips	Cree Bridgelux

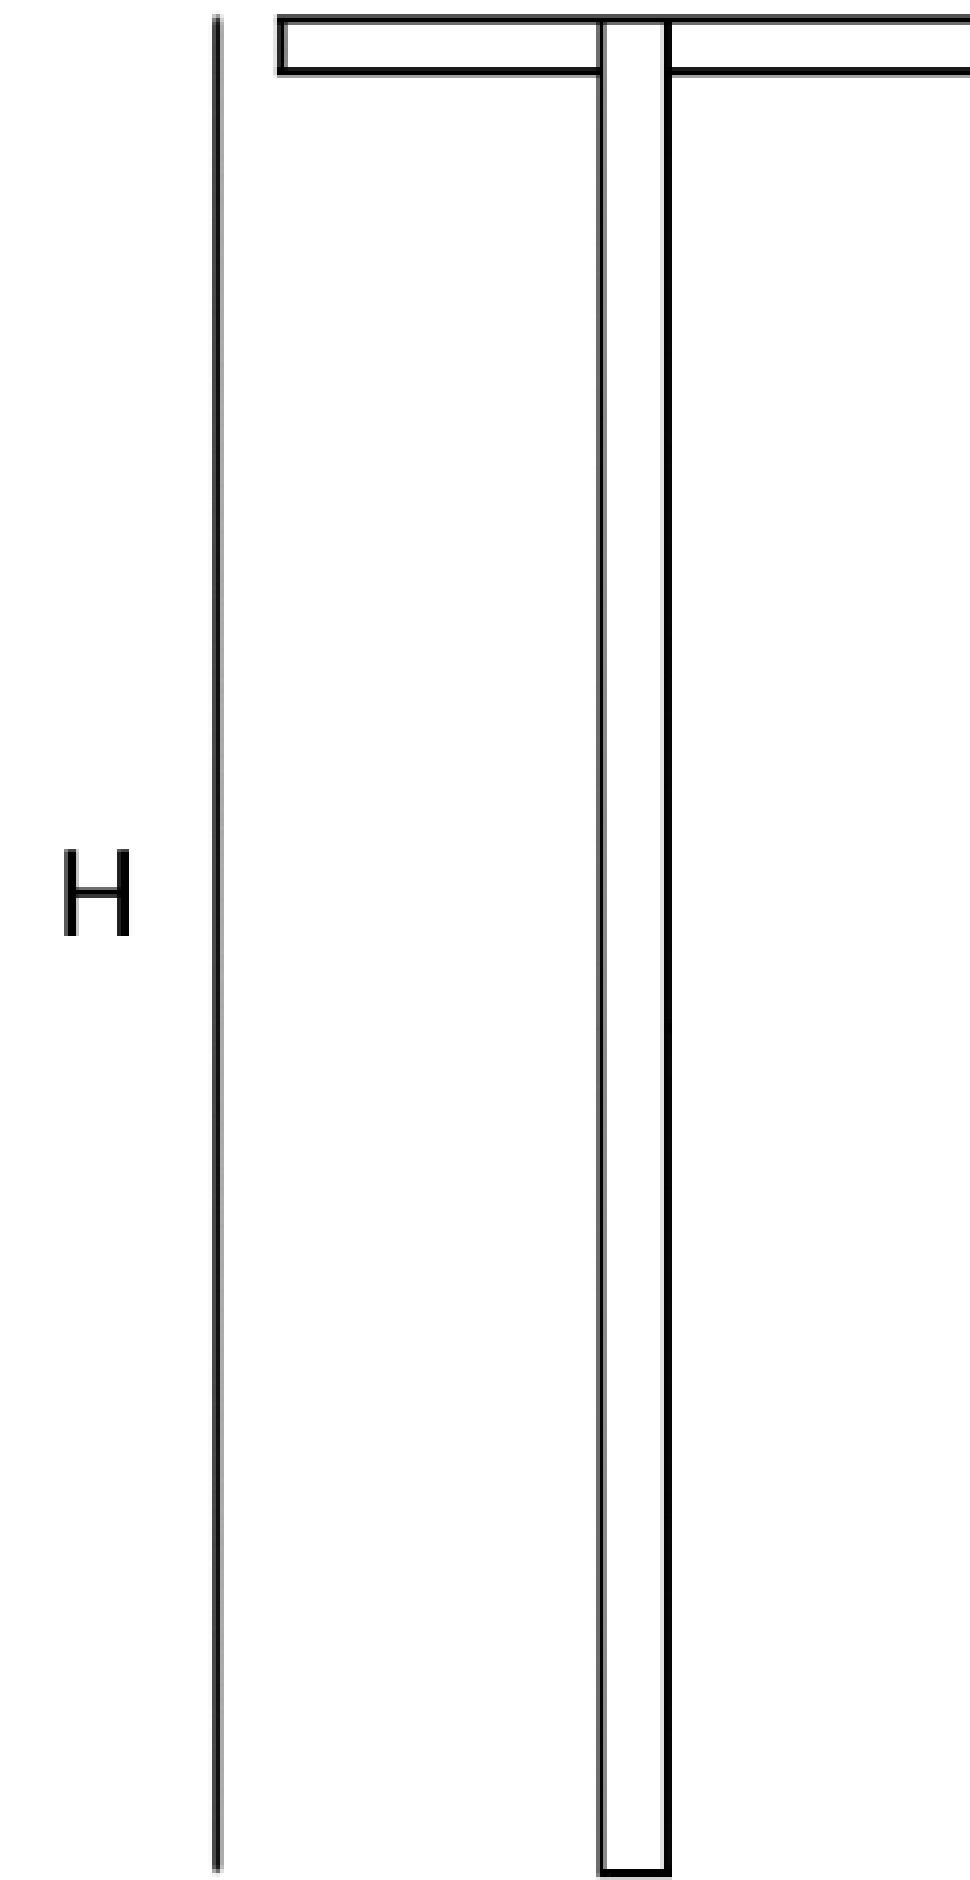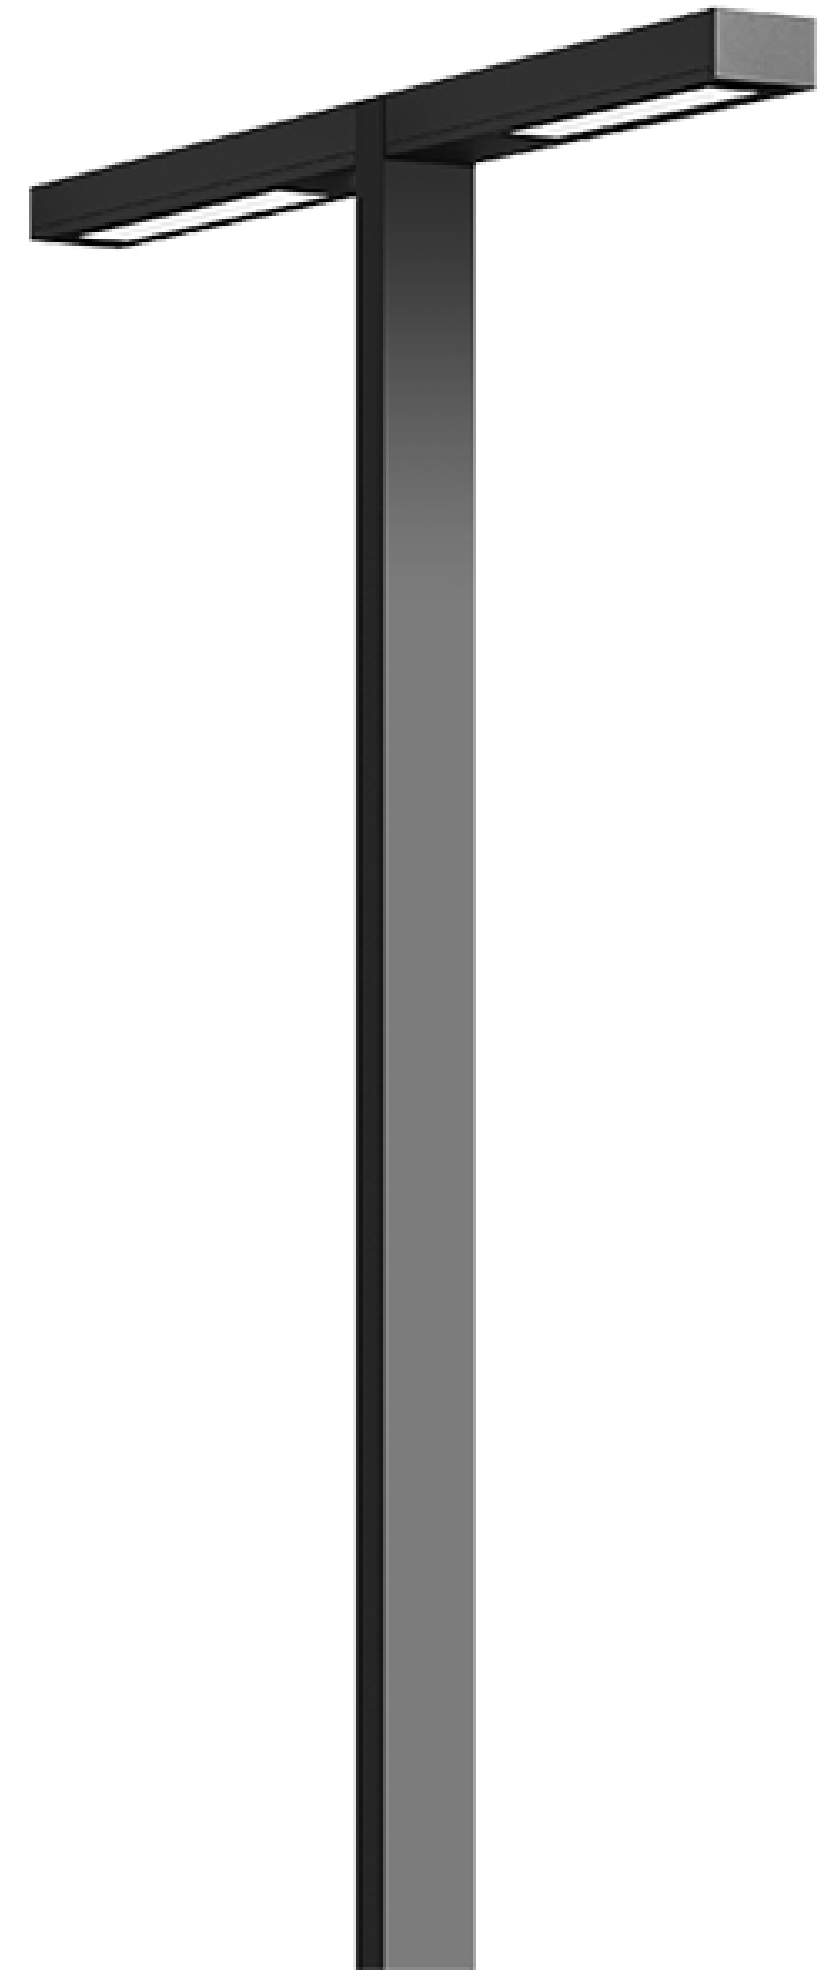

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

