

Pole Light

SLT-6606



PERFORMANCE DATA

Efficacy : 120 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Class : I

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium - Galvanized steel body

Mounting : Pole Mounted



Lens : Opal

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

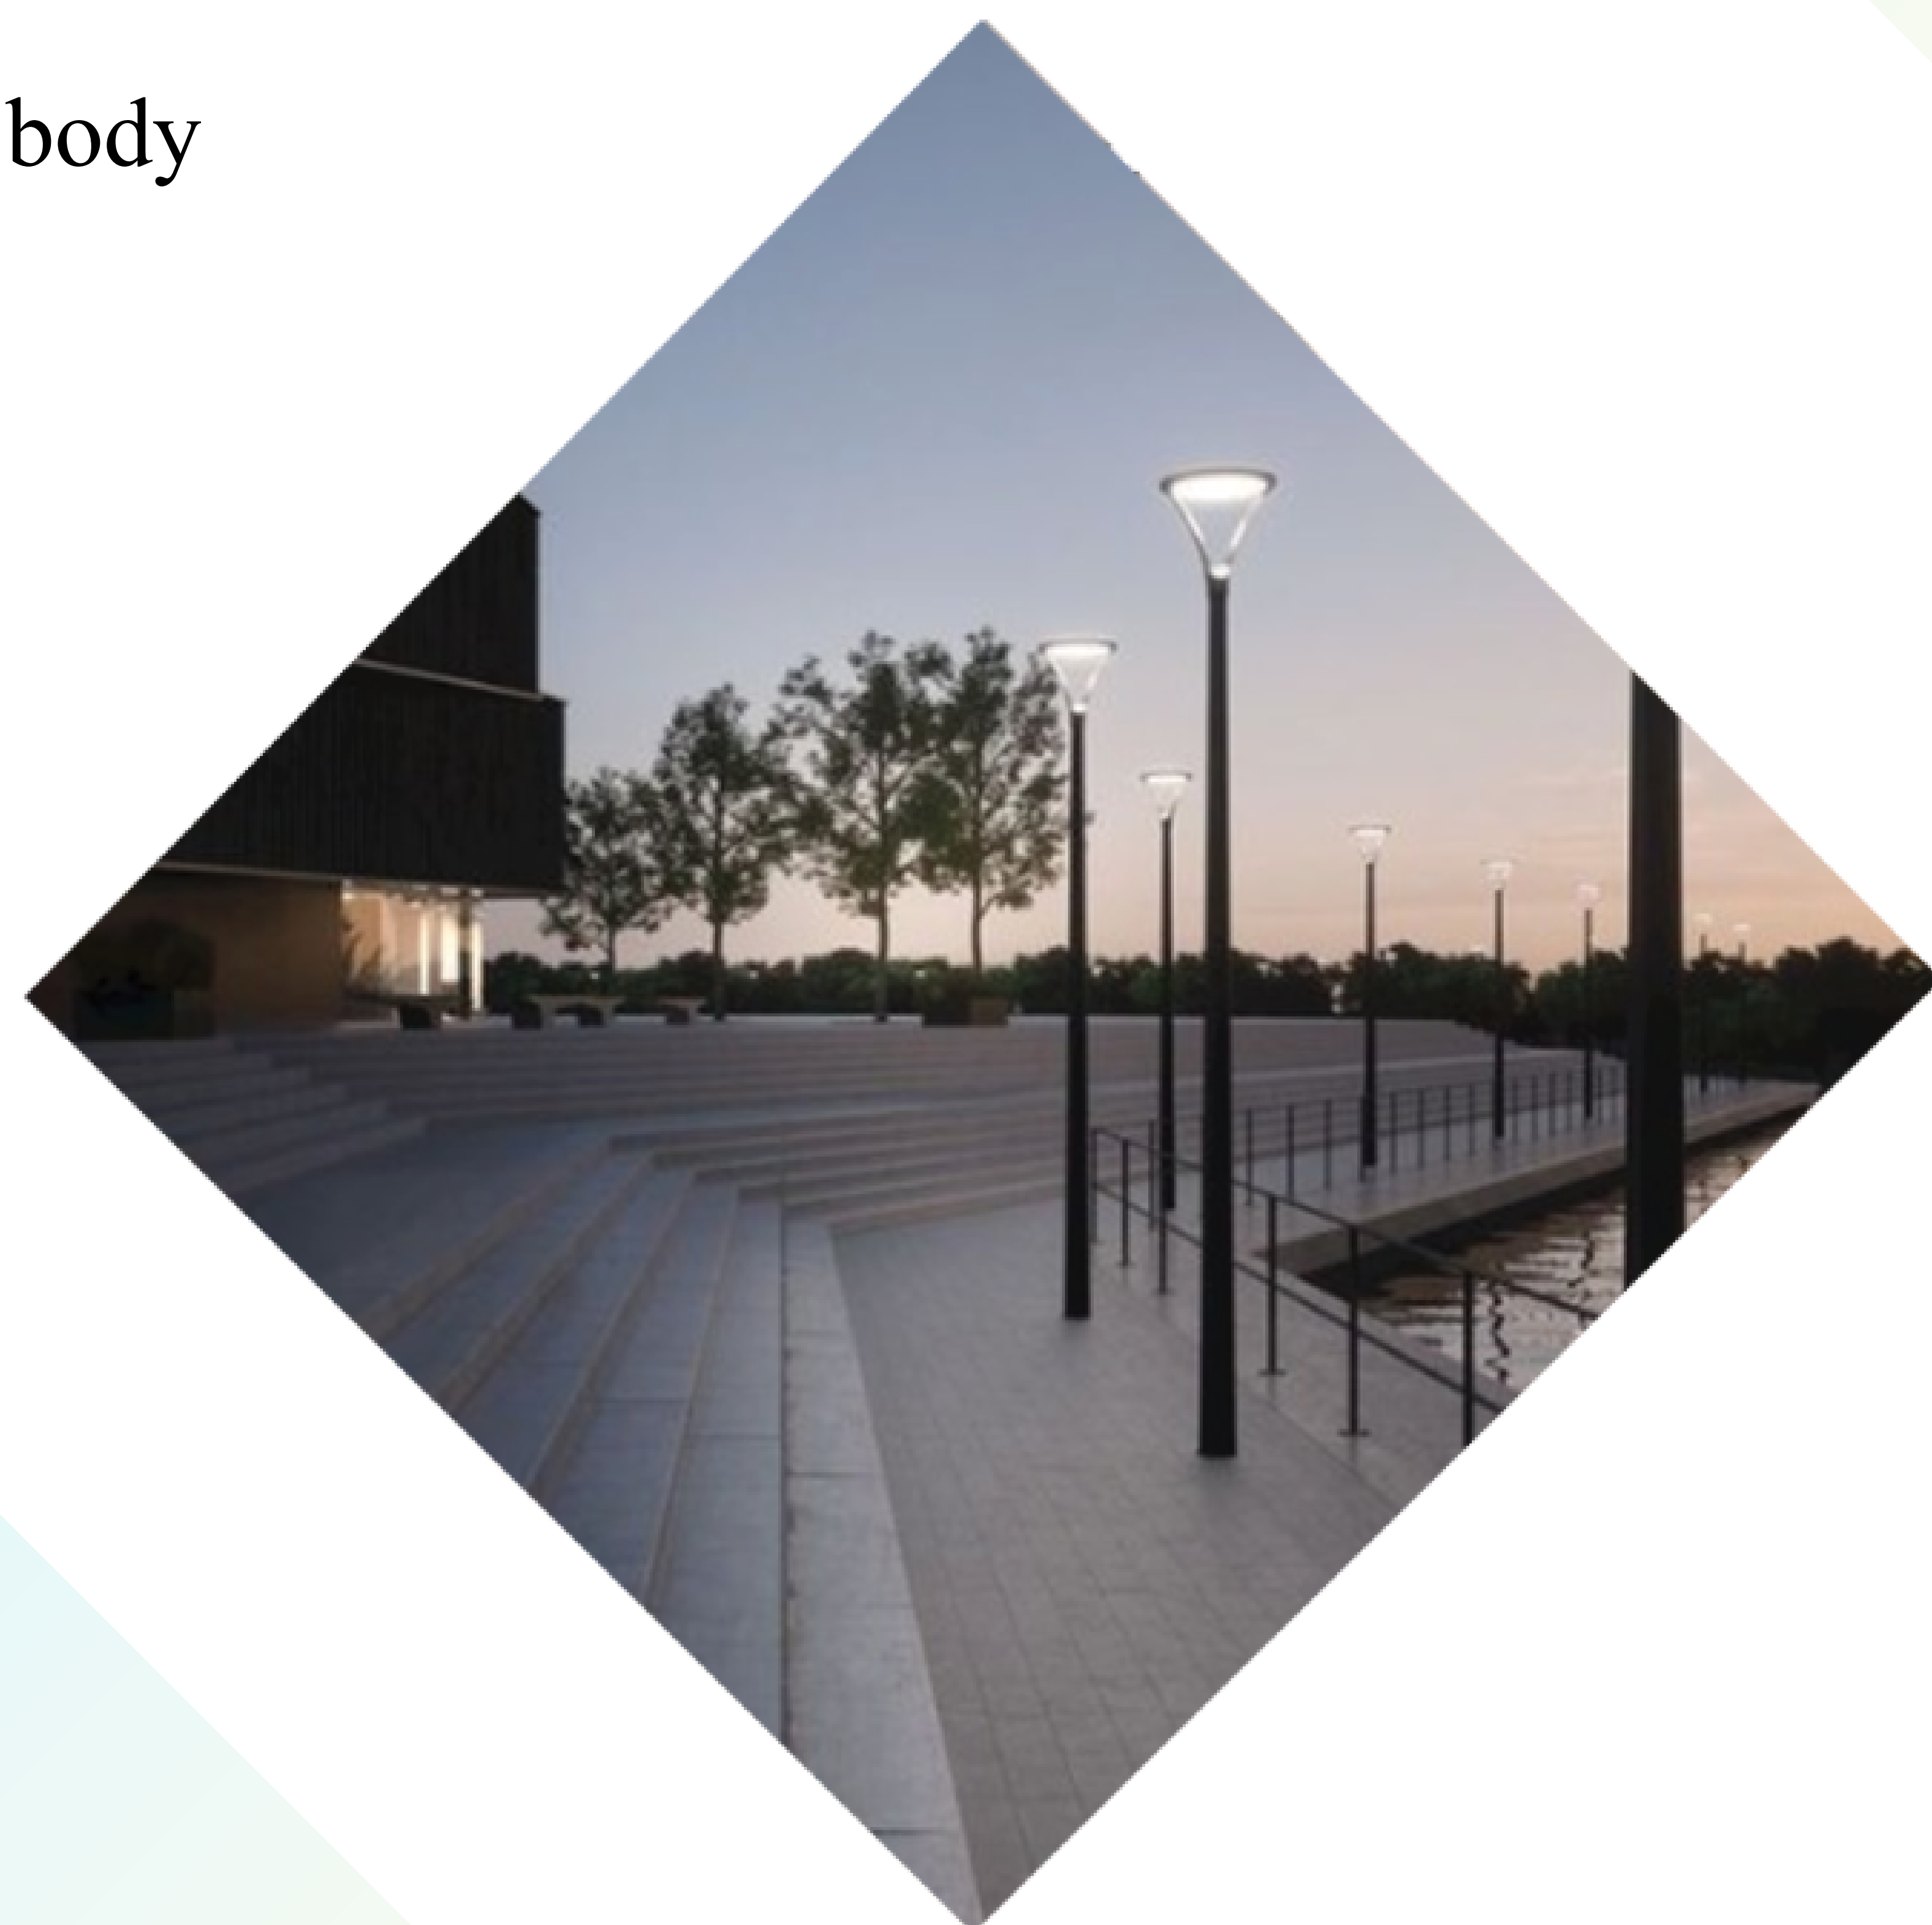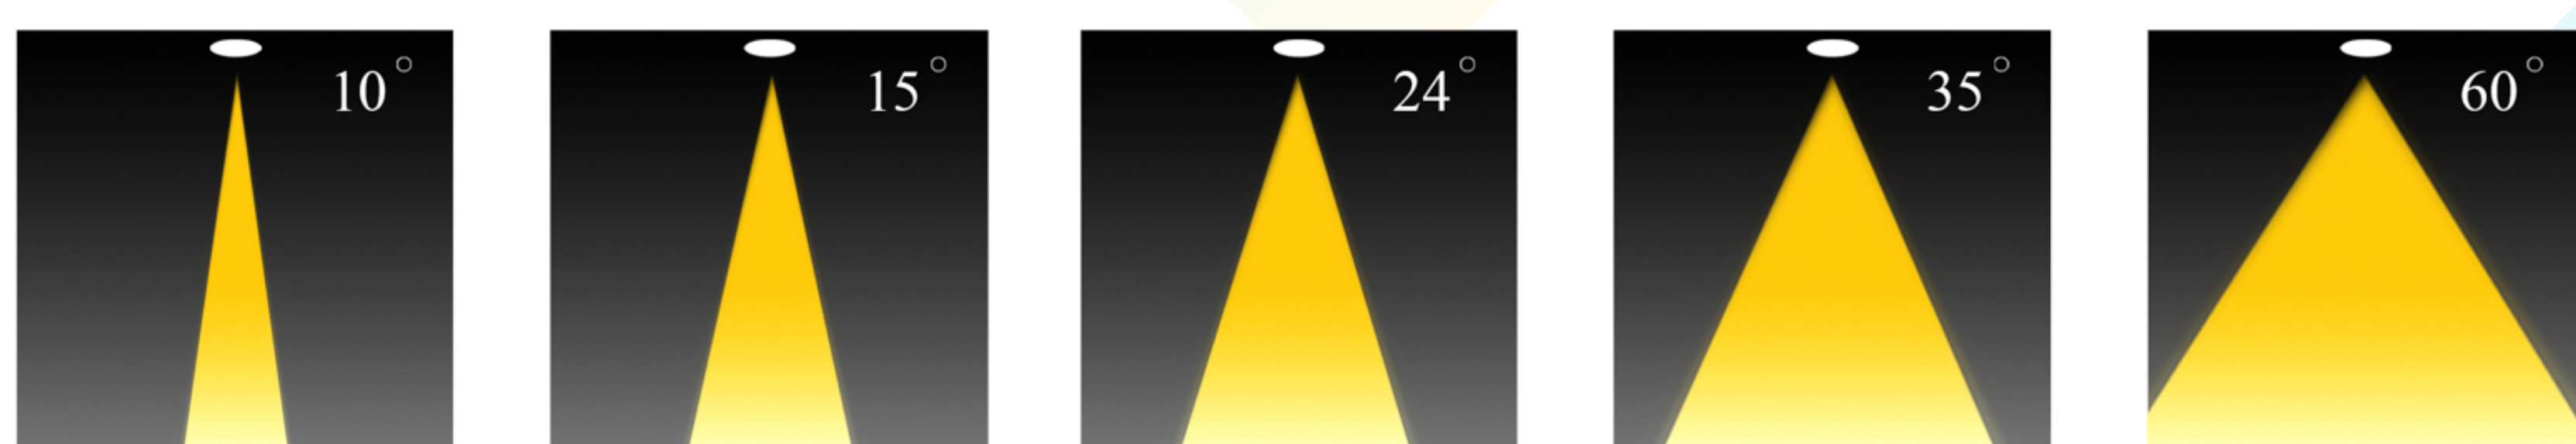

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø xH mm	Driver	LED Chip
6606330XXXXCMXXX	30 35 40 45 50	120	3000	516x5000 mm	Meanwell	Cree

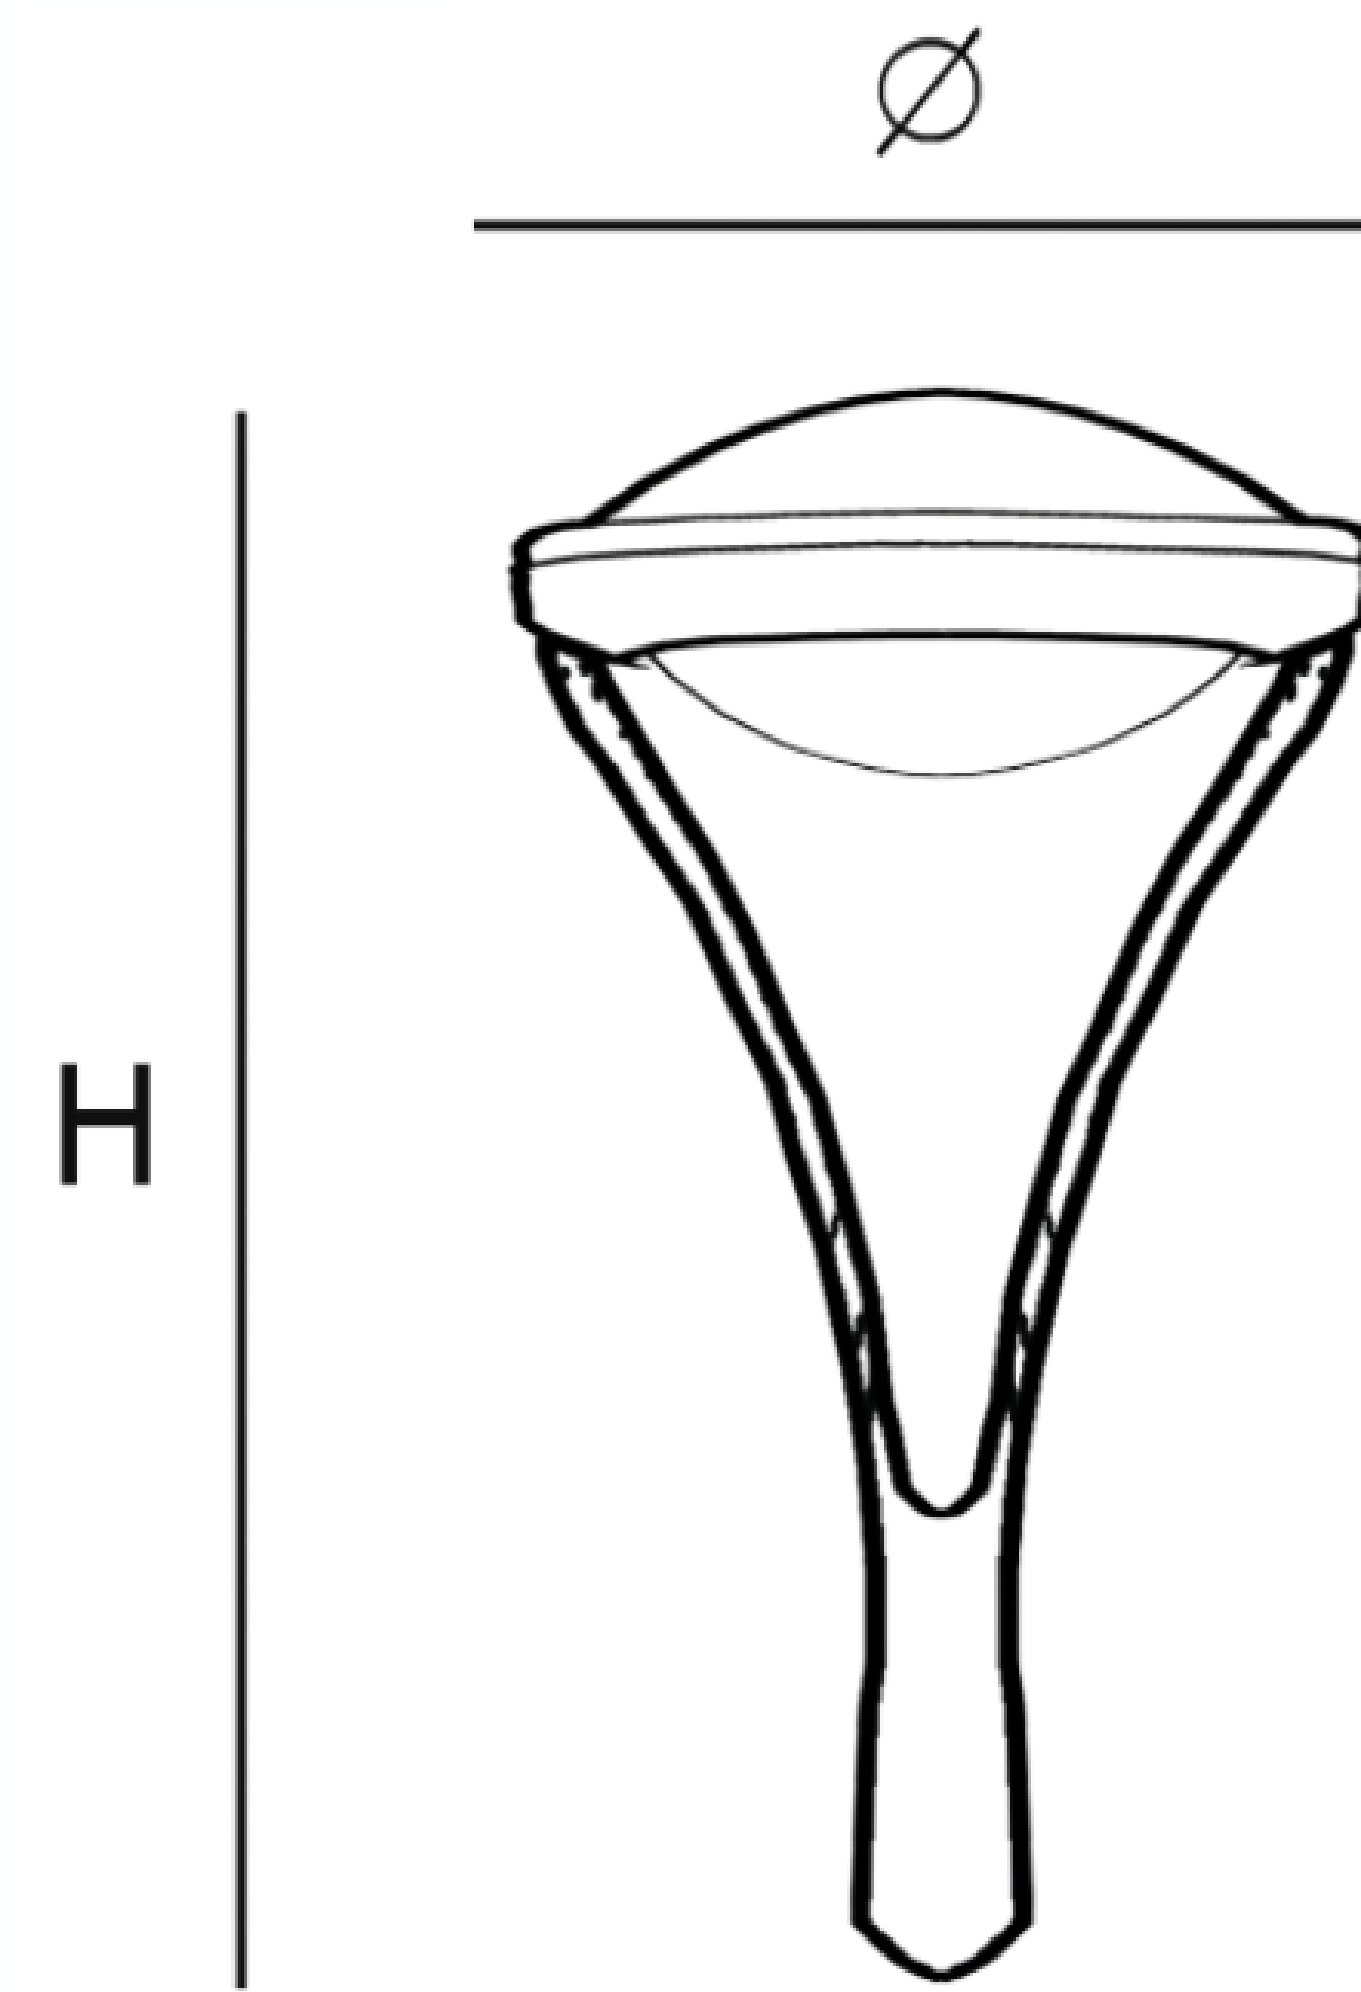

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

