

Pole Light

SLT-6608



PERFORMANCE DATA

Efficacy : 120 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Class : I

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium - Galvanized steel body

Mounting : Pole Mounted


Lens : Opal

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

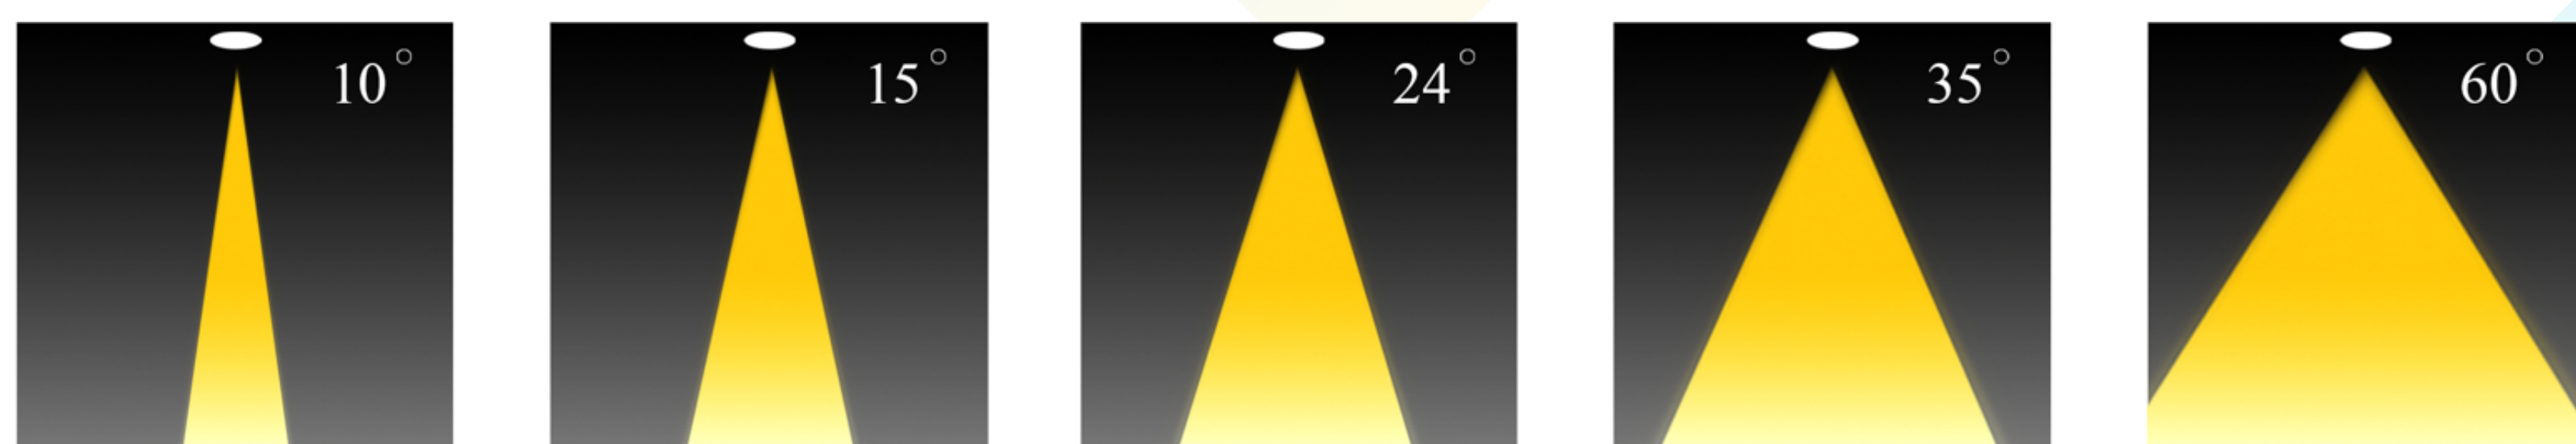

| Code | Power W | Efficacy Lm/W | Colour Temp. K | Dimensions ∅ xH mm | Driver | LED Chip |
|------------------|----------------------------|------------------|-------------------|-----------------------|----------|----------|
| 6608330XXXXCMXXX | 30 35 40 45 50 | 120 | 3000 | | Meanwell | Cree |

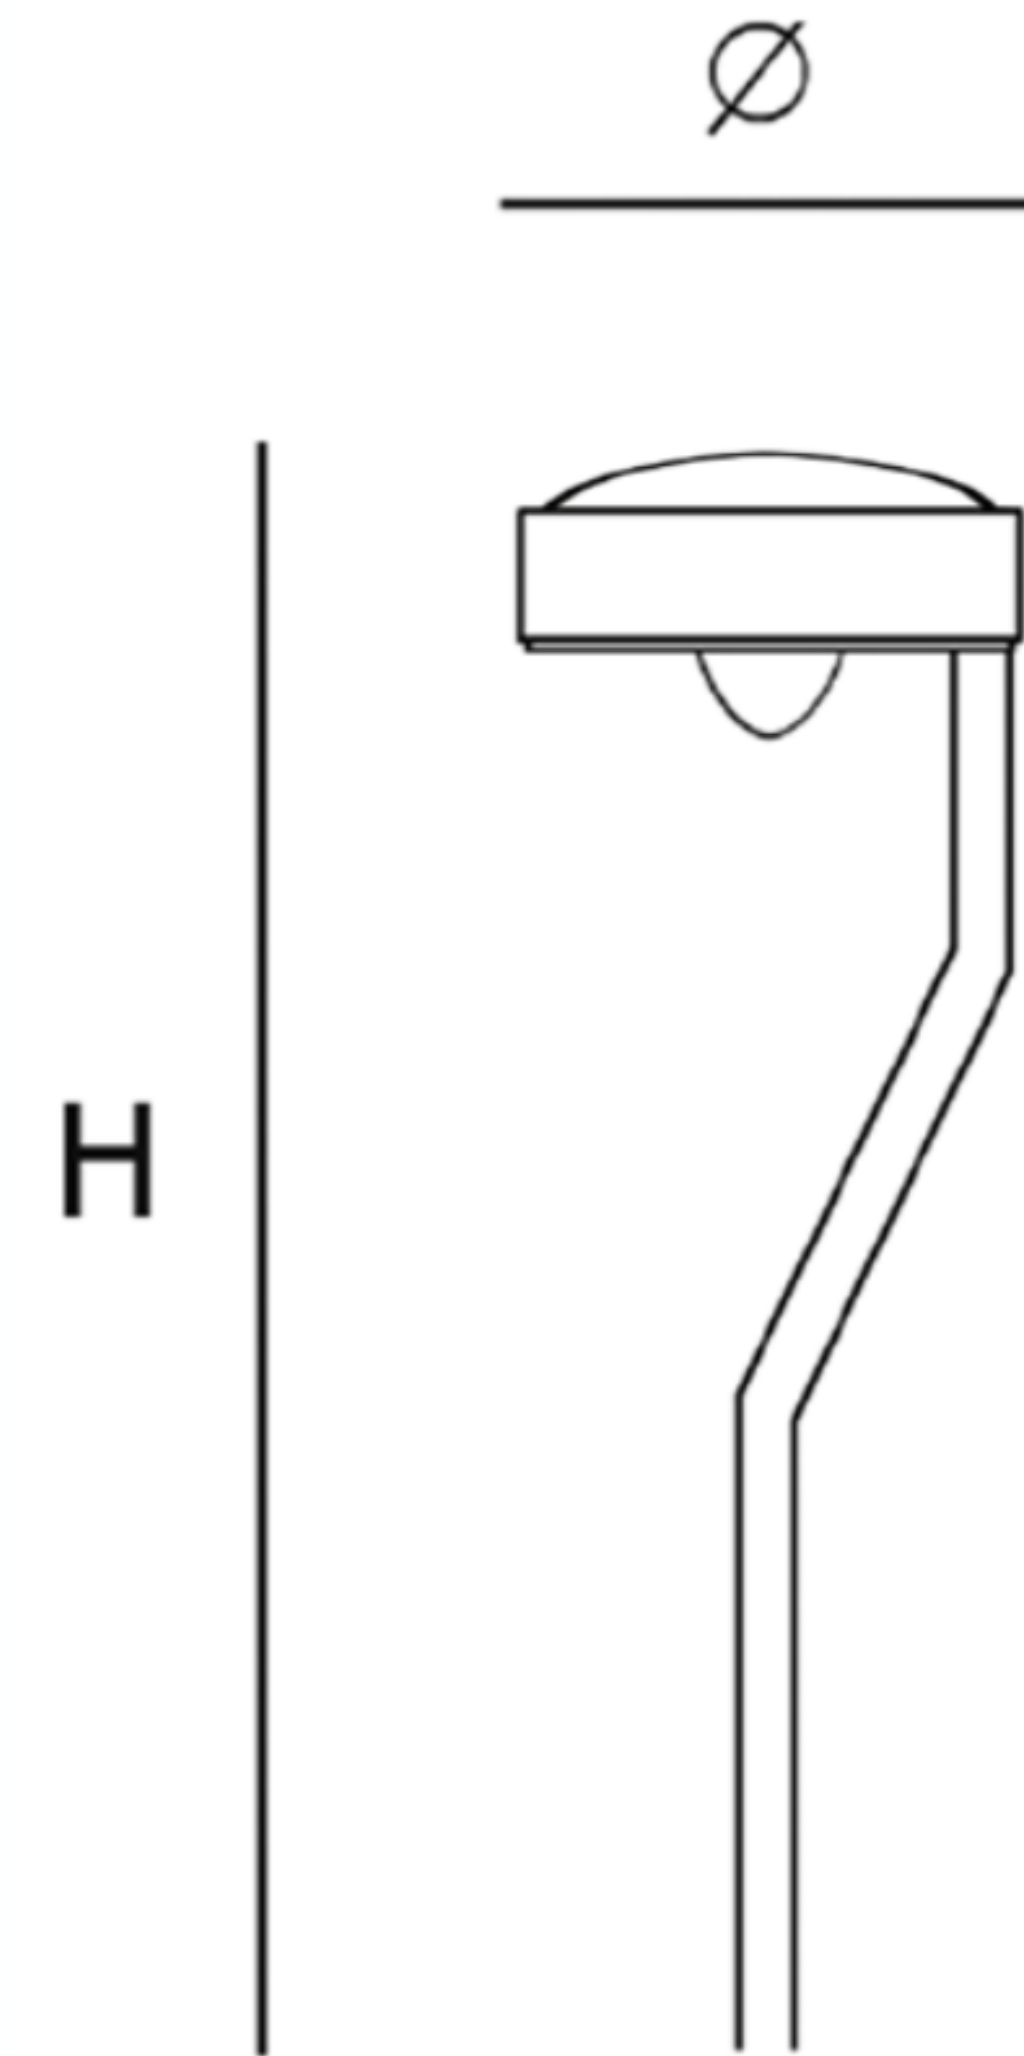

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

