

Step light

SLT-6703



PERFORMANCE DATA

Efficacy : 128 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 32°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum die cast

Mounting : Wall recessed mounted steplight



Lens : Glass

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

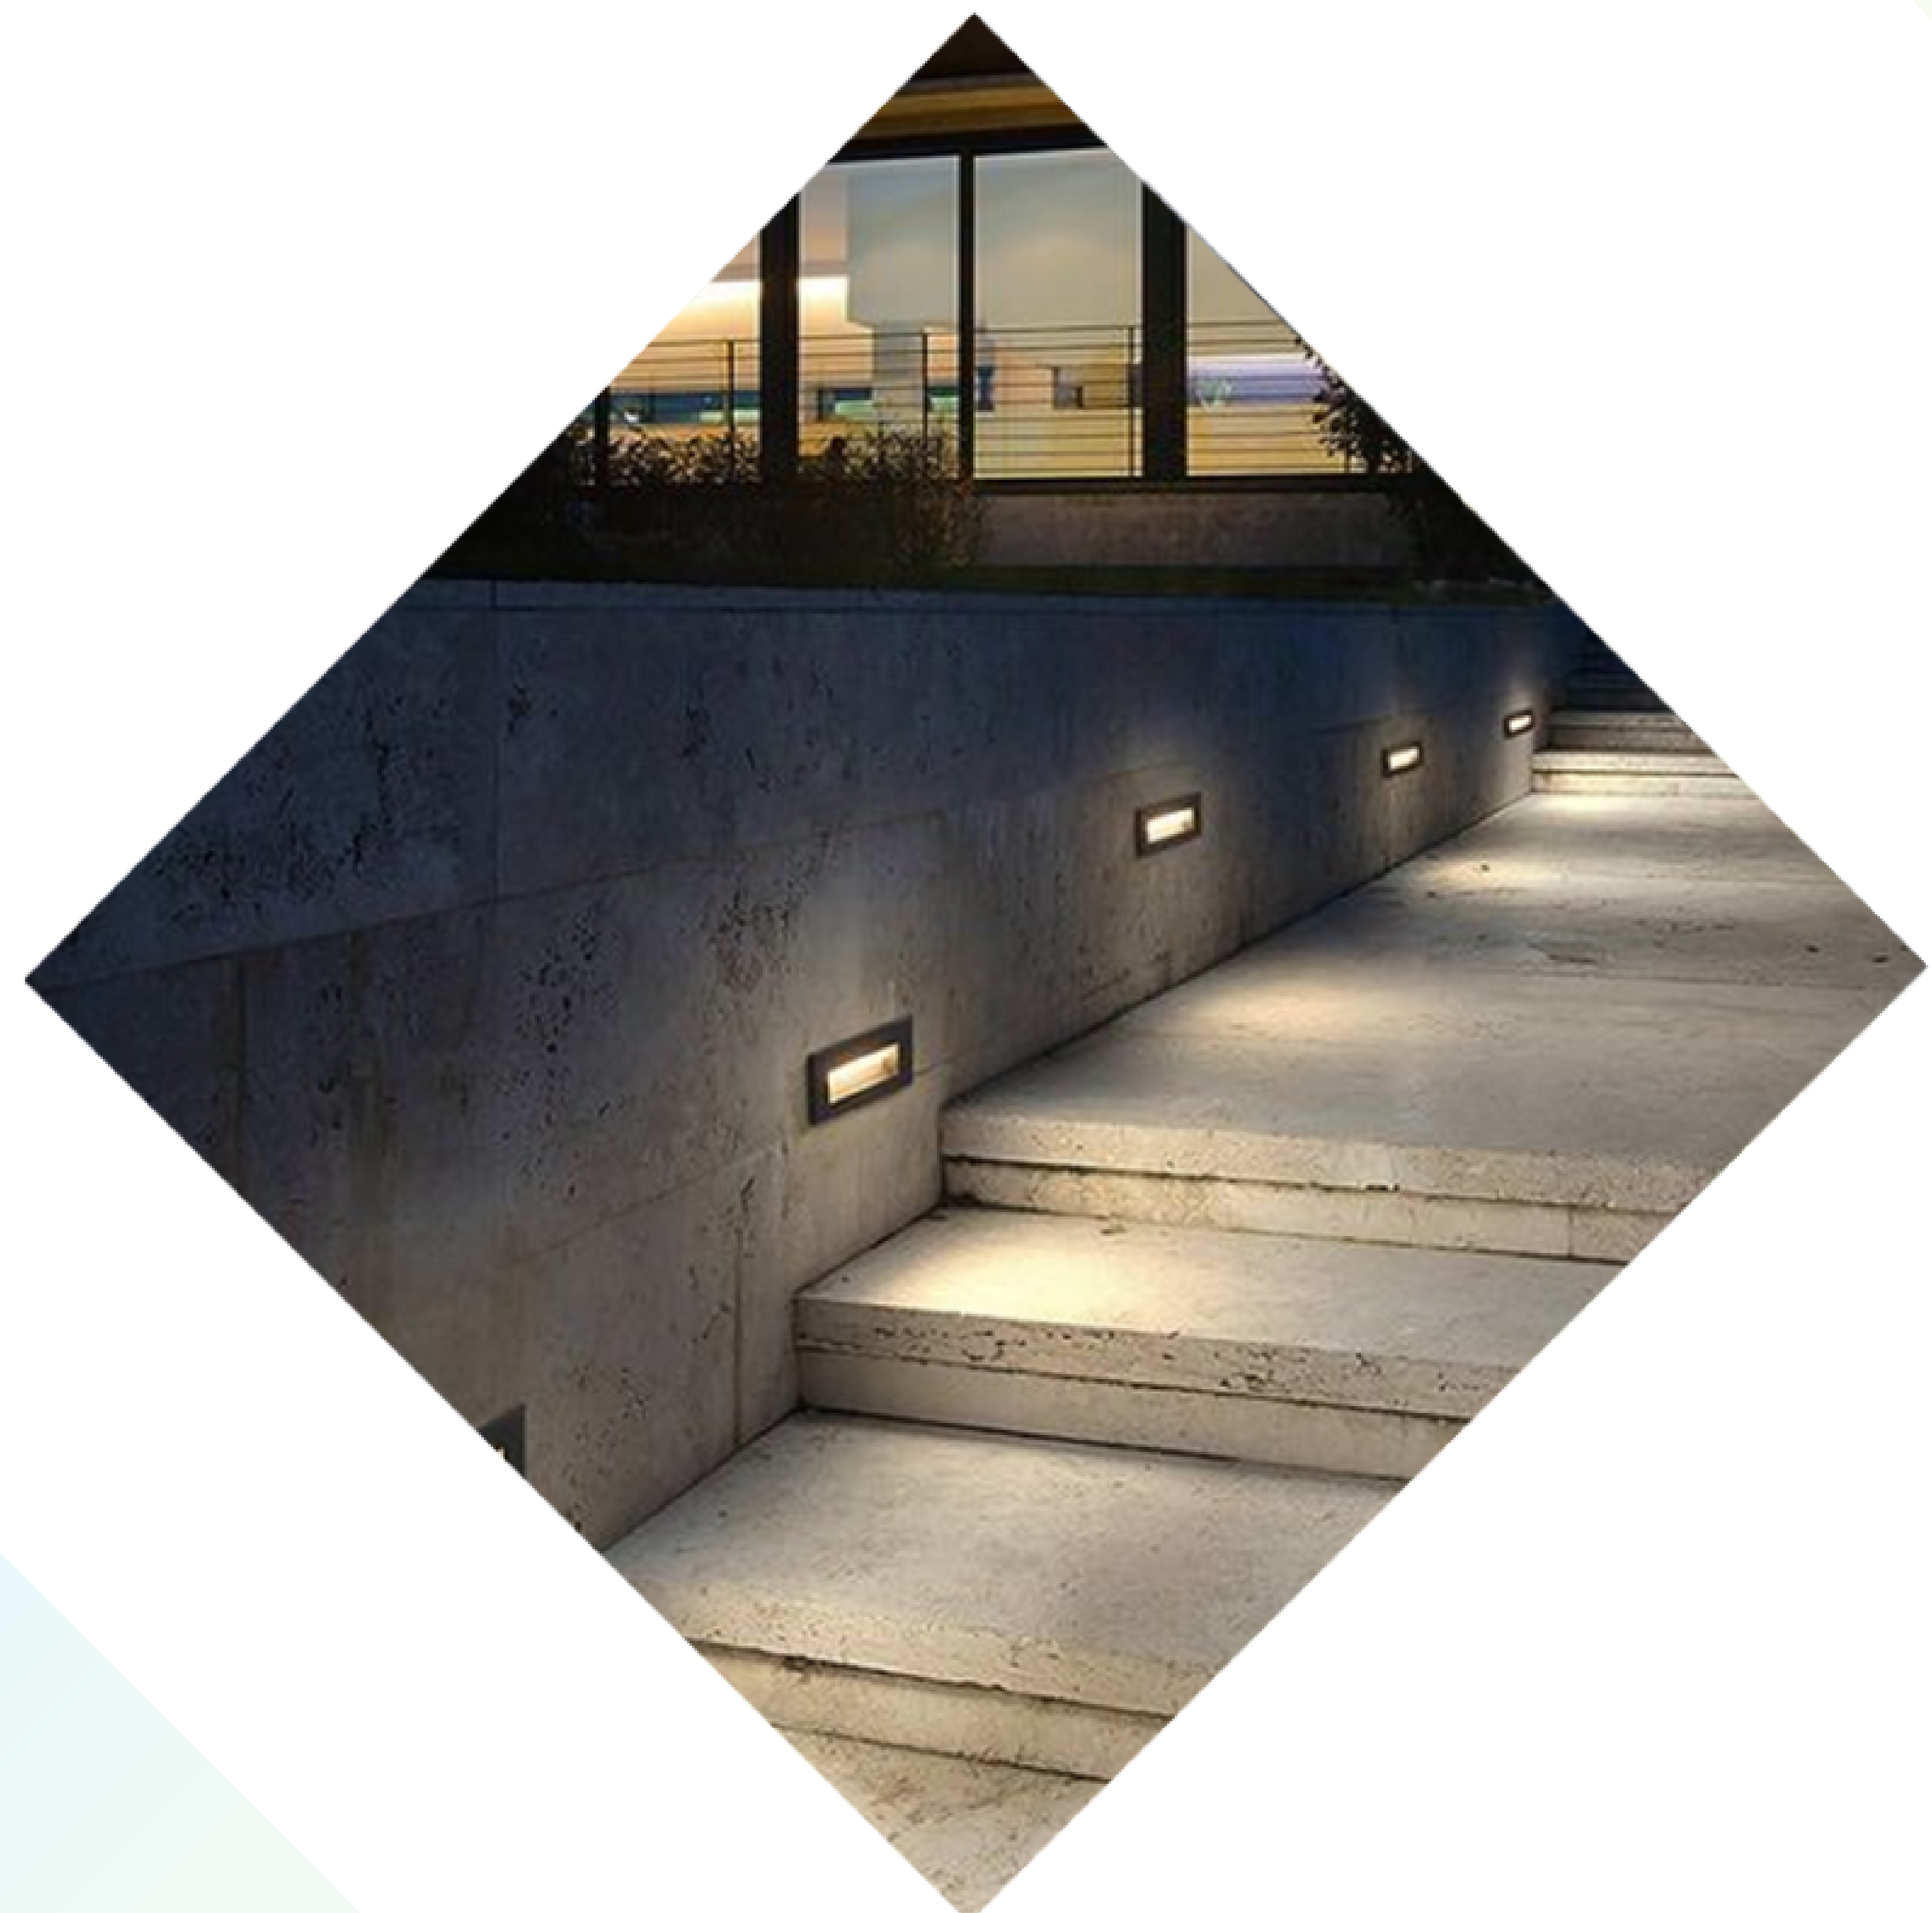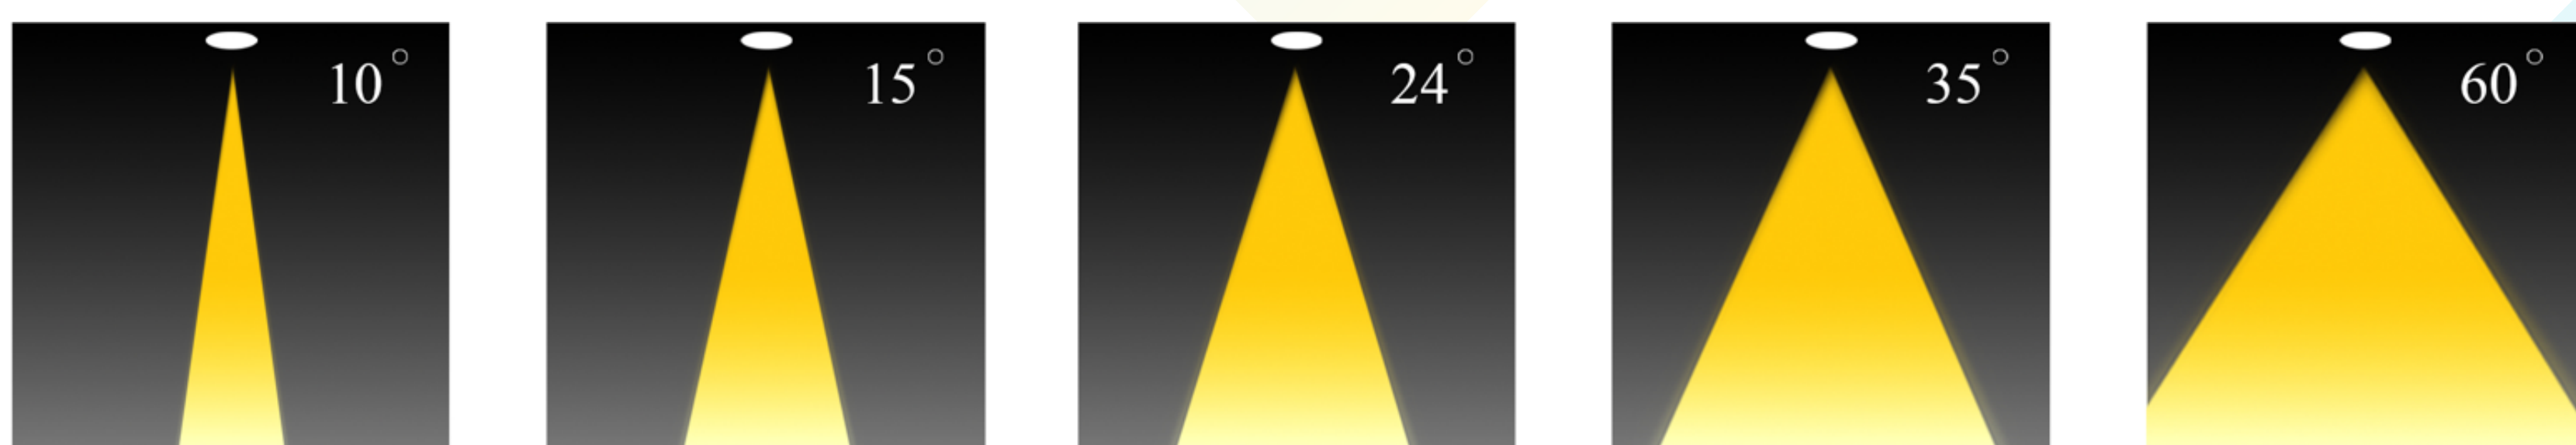

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
6703330X032MXXXX	6 - 7 8 - 9 10 - 14	128	3000	210x83x75 mm	Done Tridonic	MST	0.590

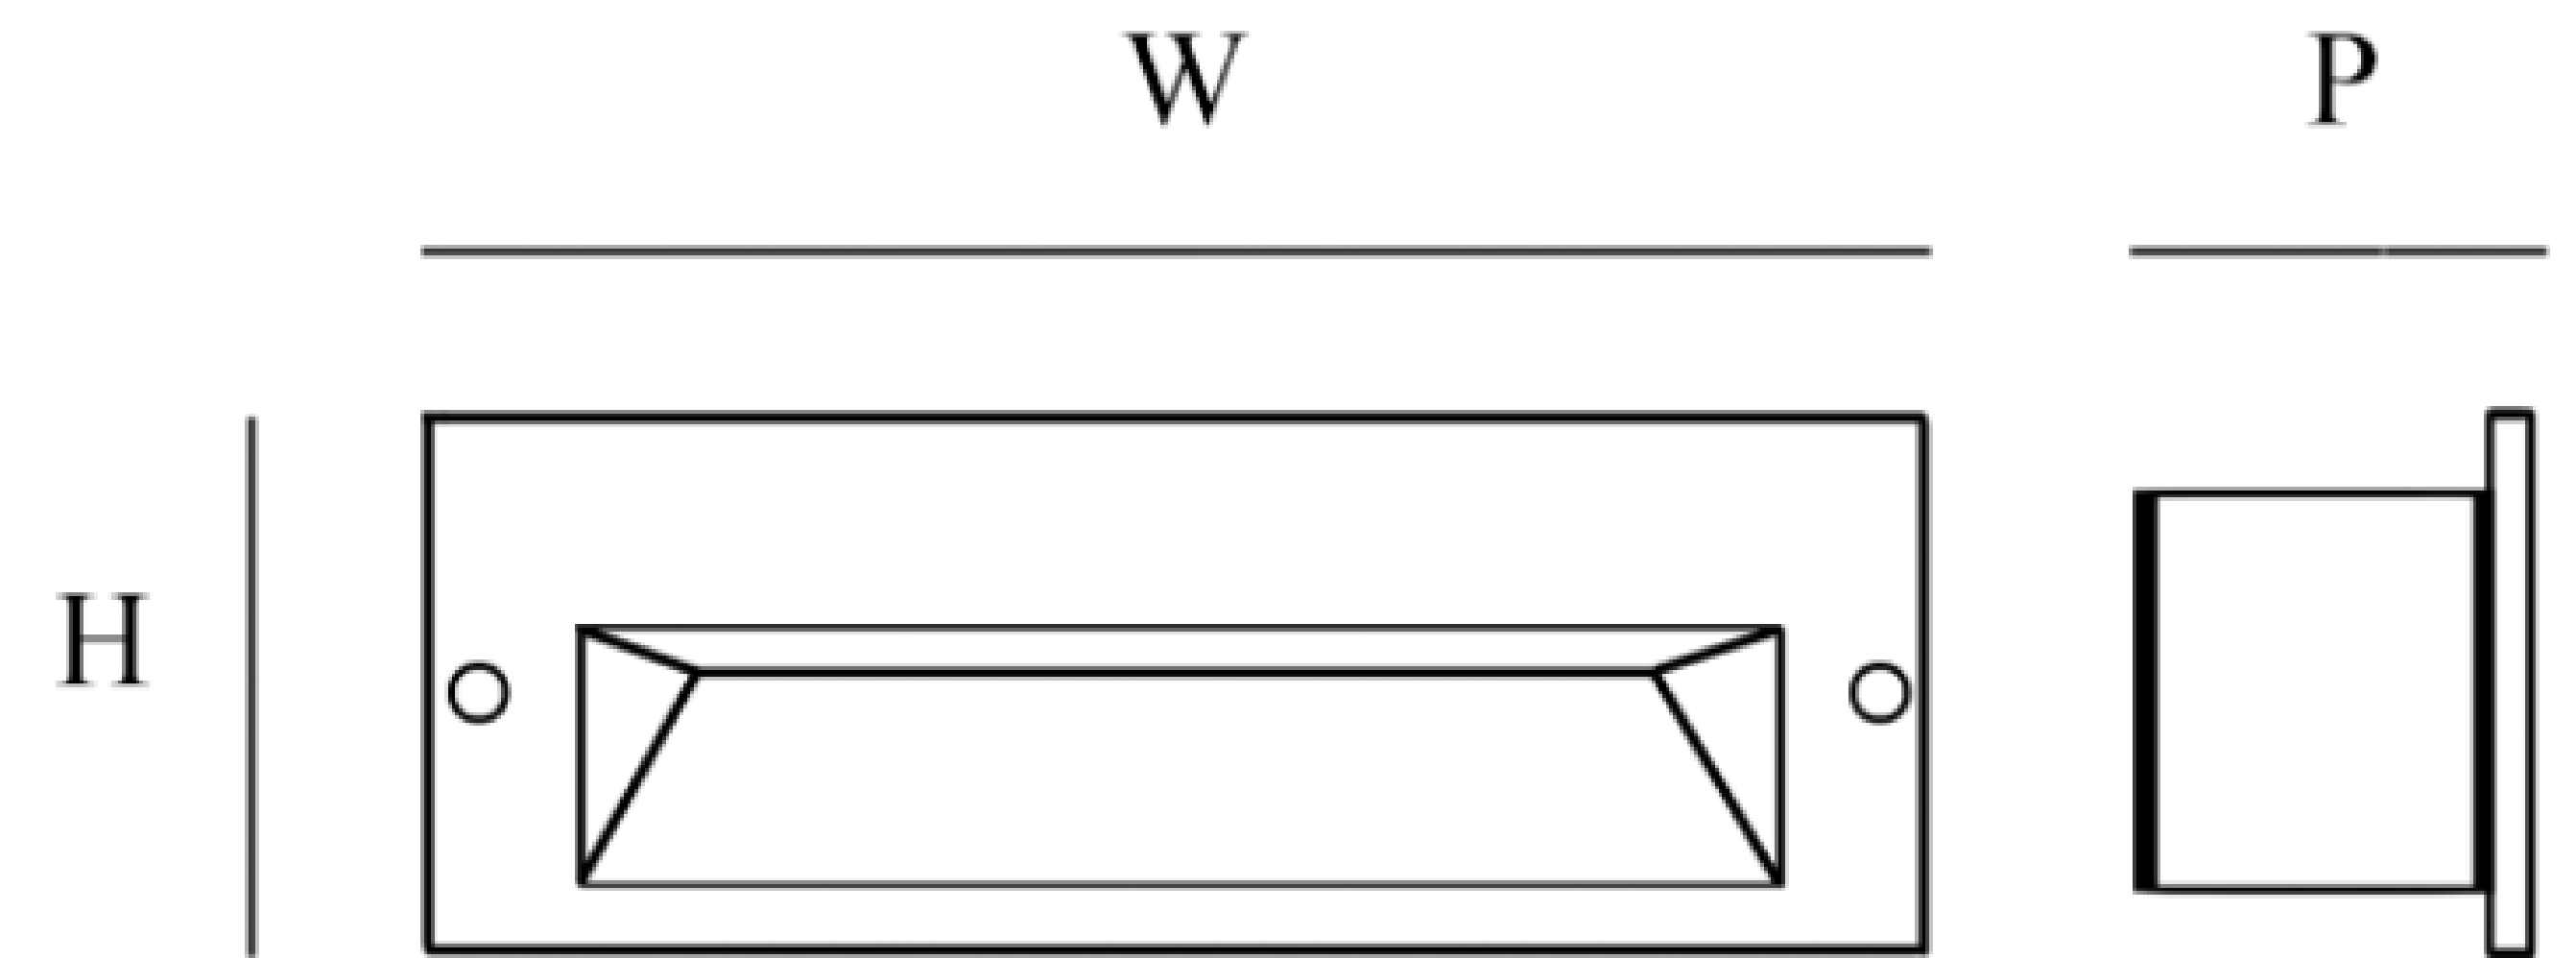

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

