

Step light

SLT-6704



PERFORMANCE DATA

Efficacy : 73 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 32°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum die cast

Mounting : Wall recessed mounted steplight


Lens : Glass

Finish : Gray

Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

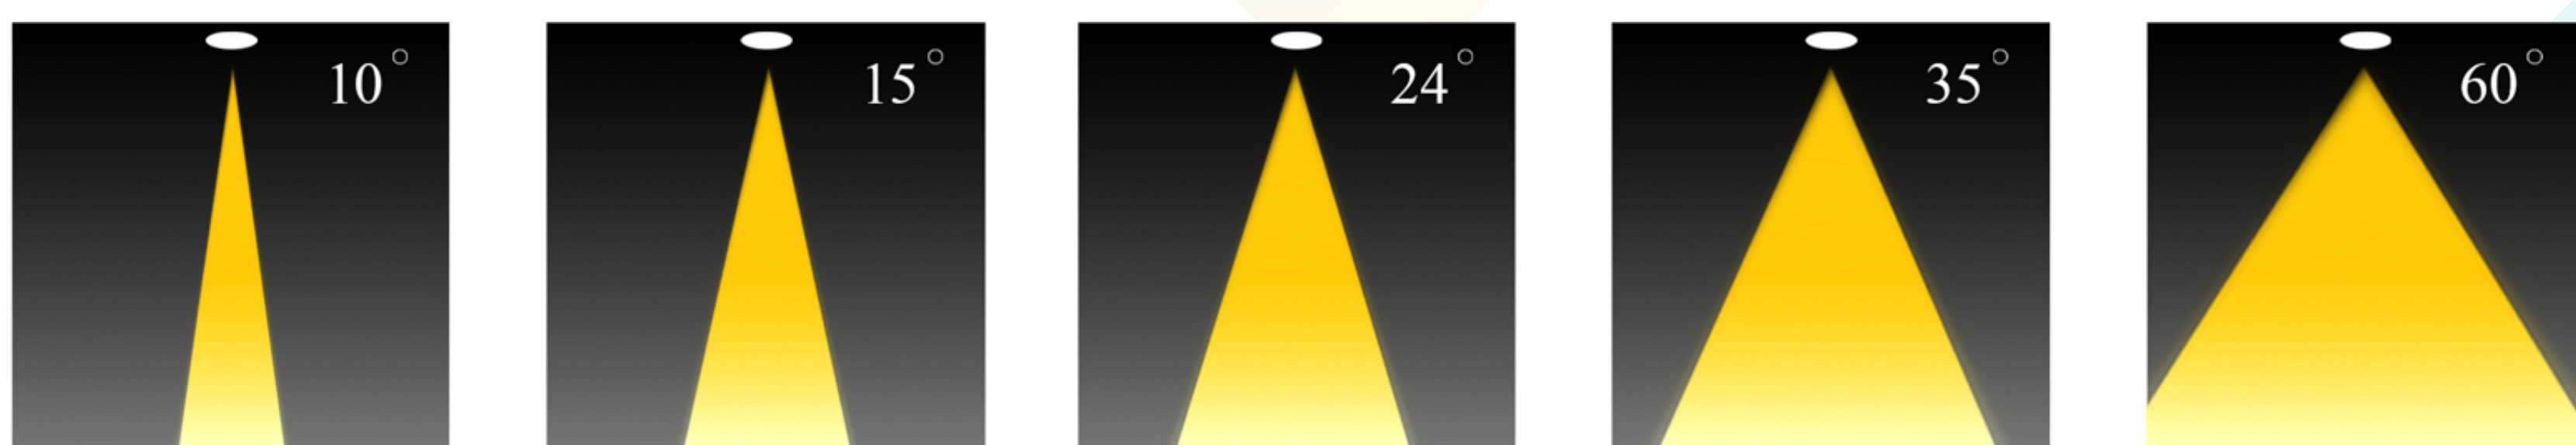

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
6704330X097MTXXX	6 - 7 8 - 9 10 - 14	73	3000	220x83x85 mm	Tridonic	MST	0.705



CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

