

# Step light

SLT-6705



## PERFORMANCE DATA

**Efficacy :** 26.8 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 46°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum body

**Mounting :** Wall recessed light


**Lens :** Frost glass

**Finish :** Gray RAL 7016


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

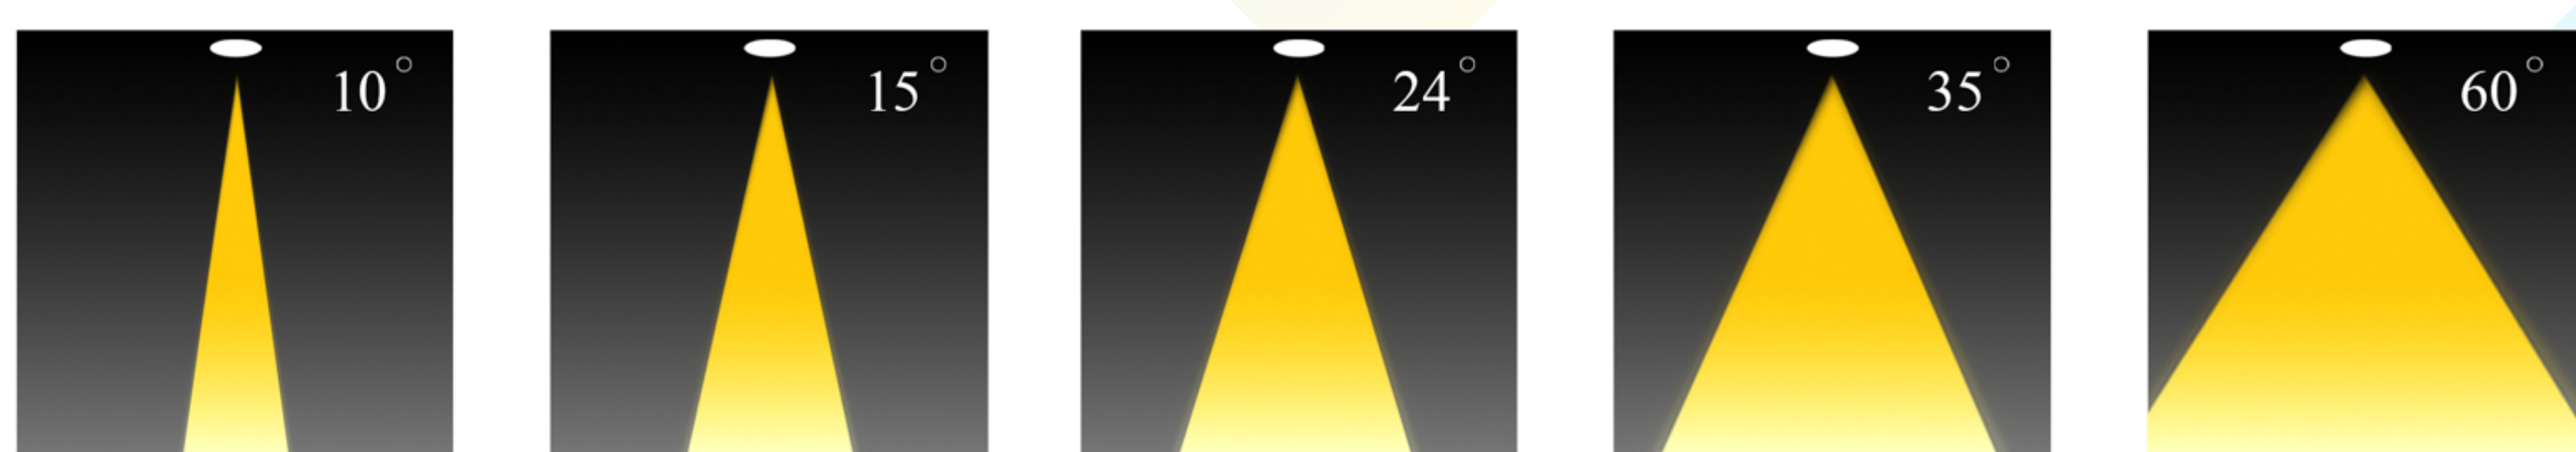

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
670533X046MD006	6	26.8	3000	110x110x98 mm	Done	MTC	0.615

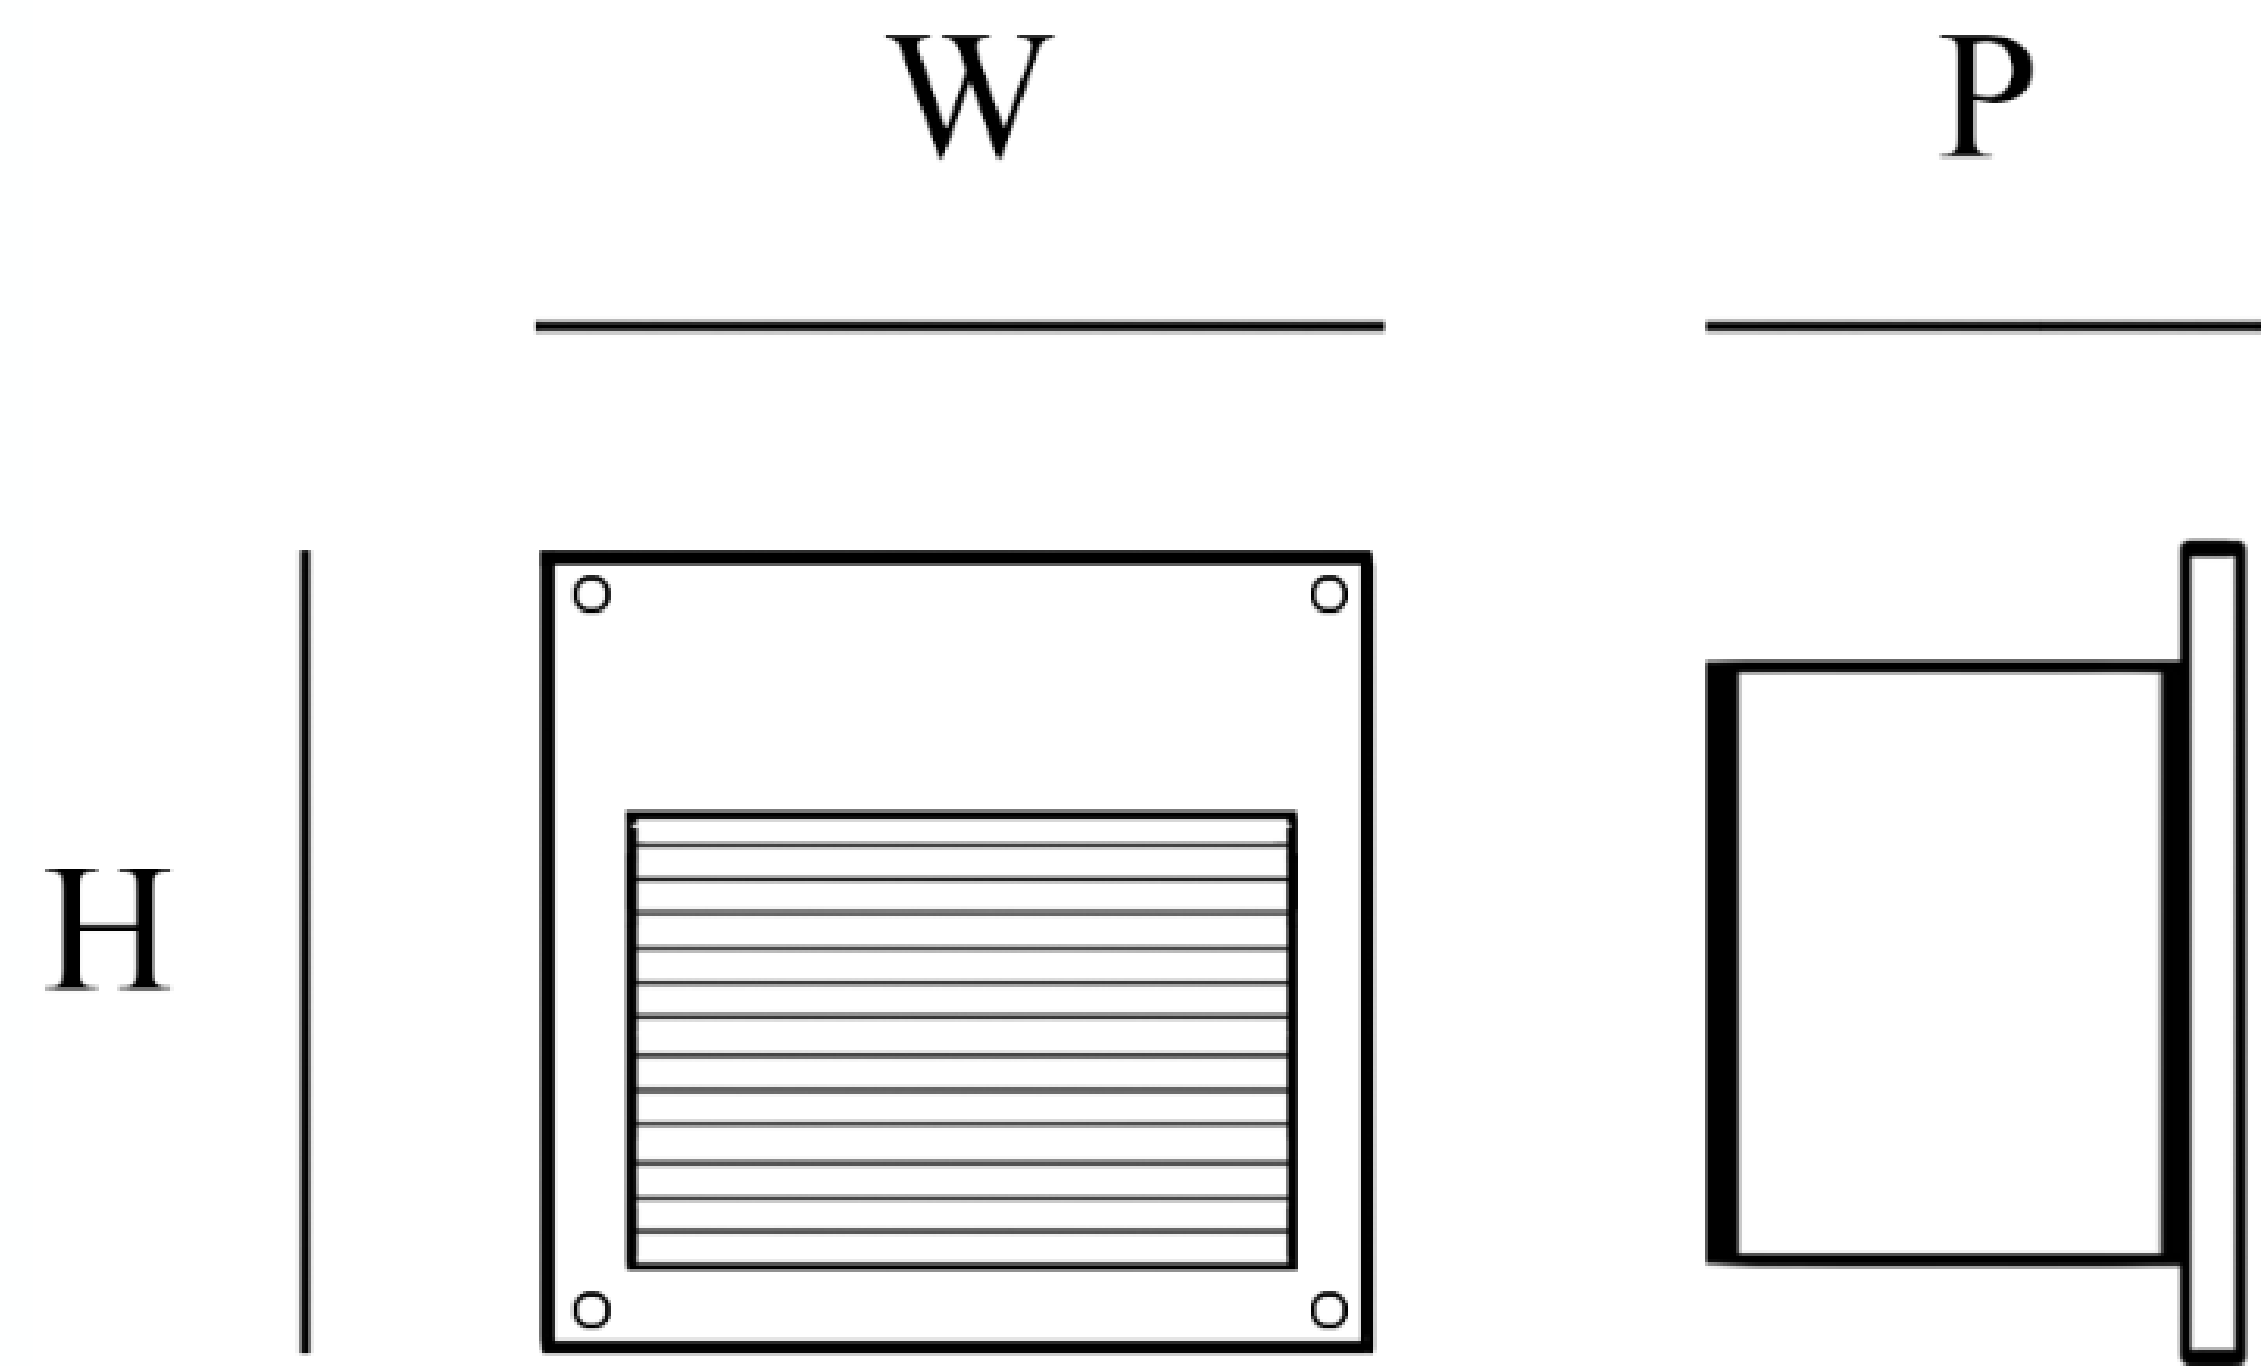

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

