

Step light

SLT-6708



PERFORMANCE DATA

Efficacy : 105 Lm/W

Input Voltage : 220V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 45°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminum & Stainless Steel

Mounting : Wall Mounted/Step Mounted


Lens : Glass

Finish : Grey


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

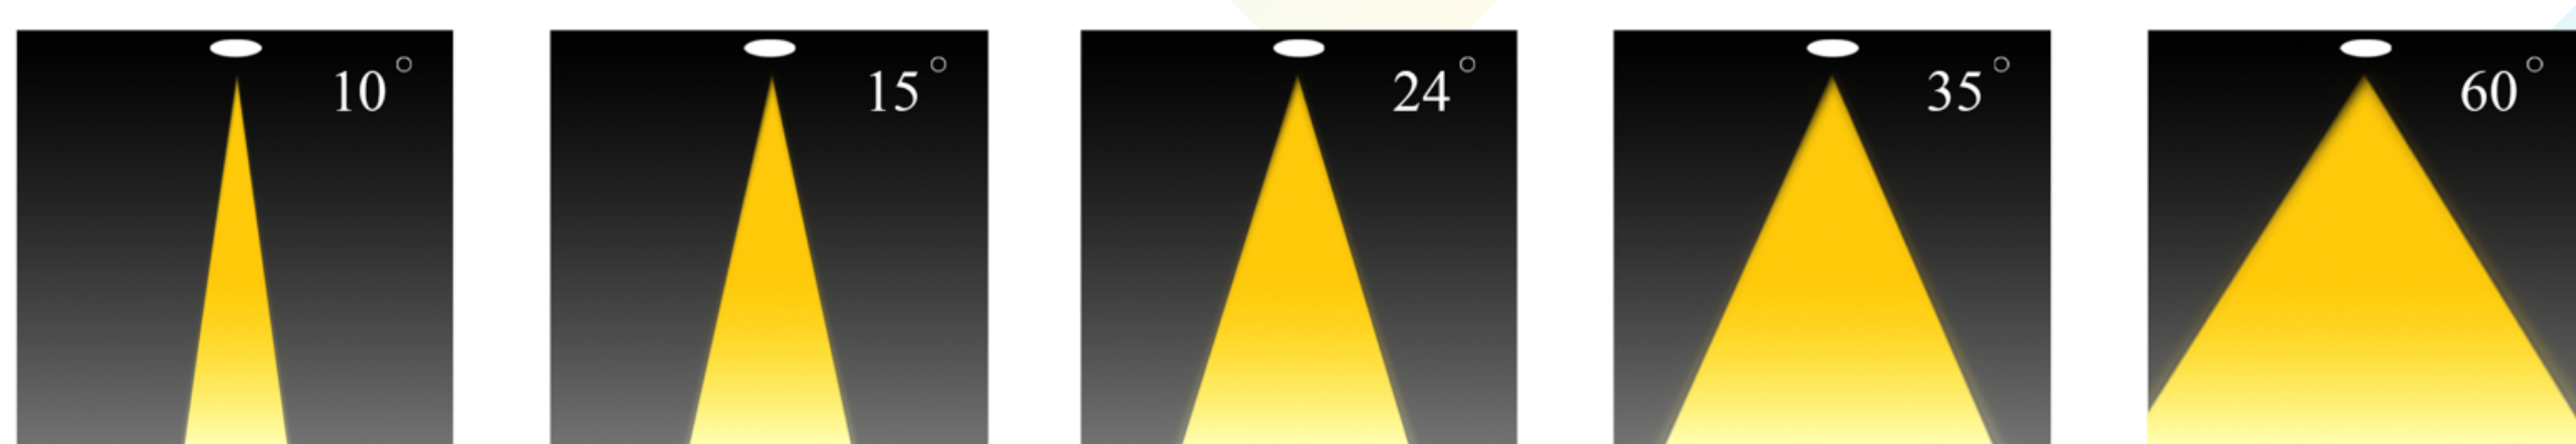

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions LxWmm	Driver	LED Chip	Weight Kg
67083308000OE003	3	125	3000	105x60 mm	Eaglerise	Osram	0.180

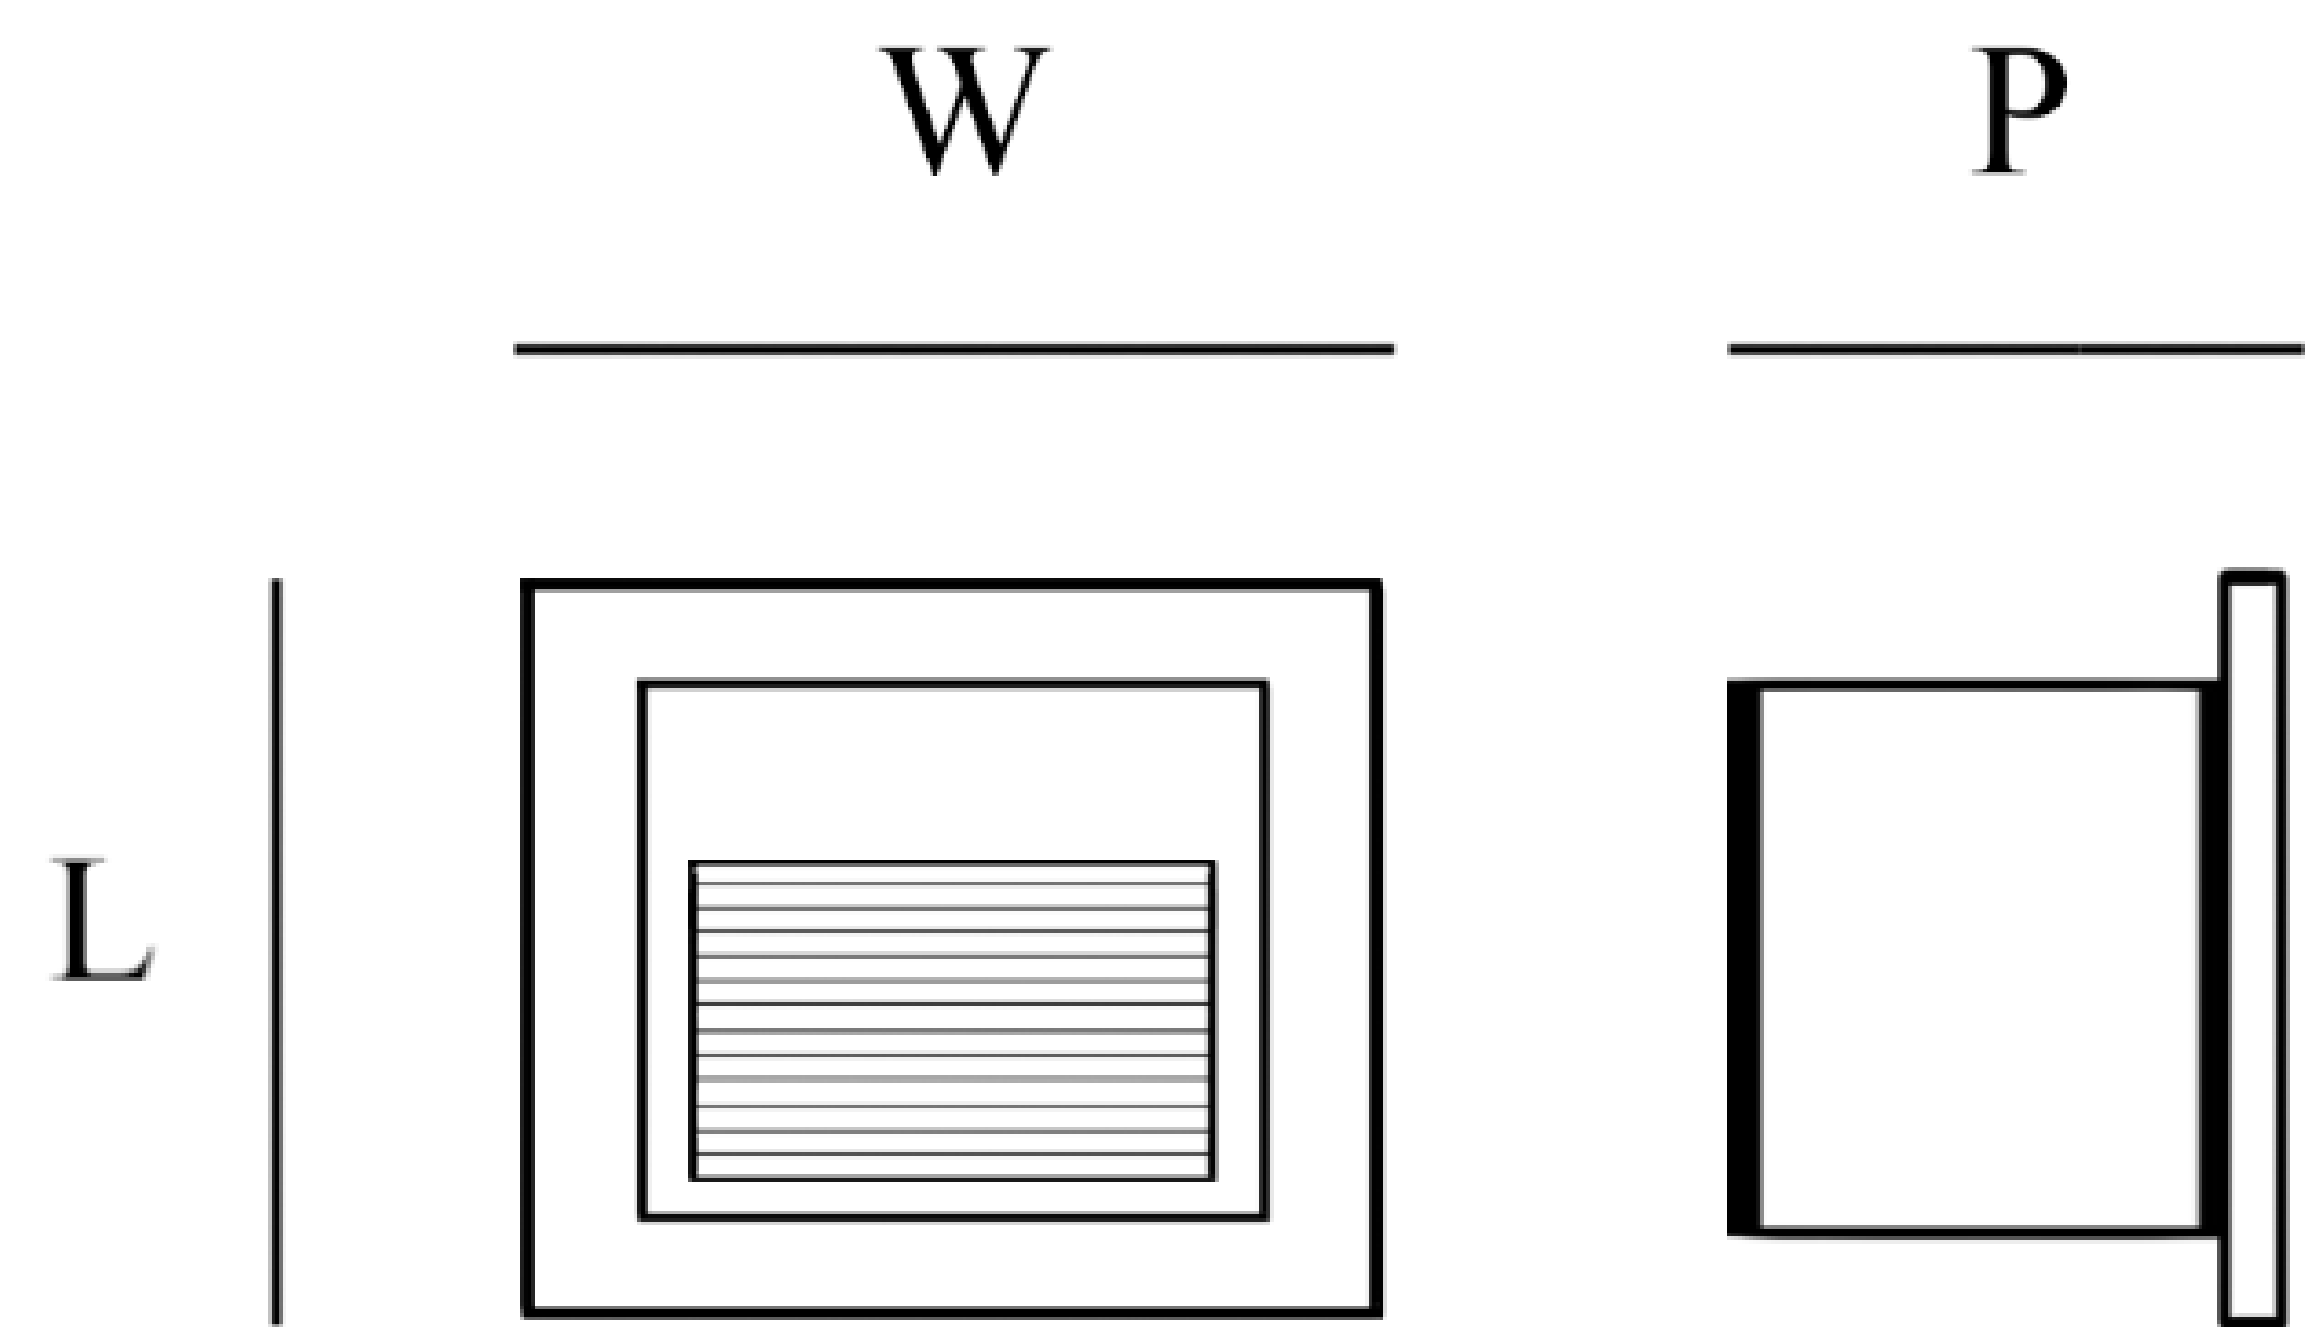

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

