

Weather proof

SLT-7007



PERFORMANCE DATA

Efficacy : 125 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50,000 hrs

Beam Angle : 120°

Class : II

MECHANICAL SPECIFICATIONS

Material : Polycarbonate

Mounting : Surface mounted

Lens : Opal


Finish : White

Protection Class : IP 65


Mechanical resistance : IK 08



OPTICS

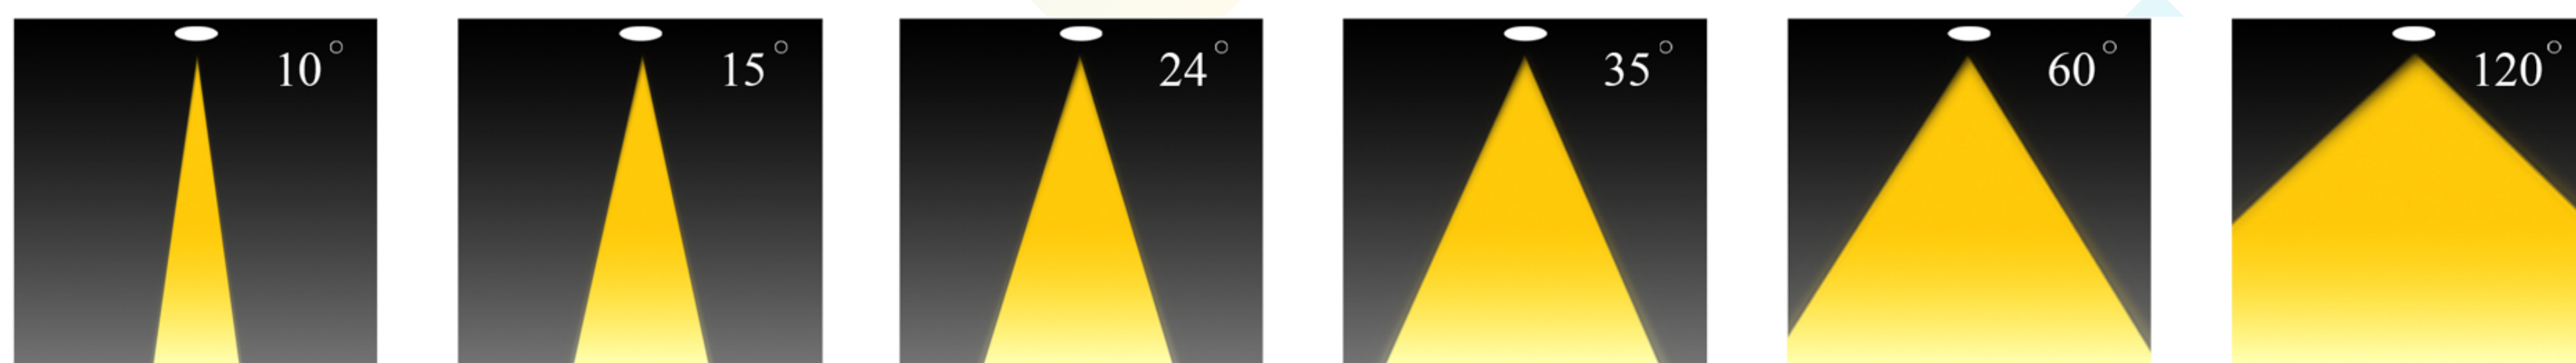

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions L×W×H	Driver	LED Chip	Weight Kg
7071XXXXXXXXXXXX	34 36 40	125	3000 4000 6500	1150×100×70	VS Philips Tridonic	Cree Osram VS Tridonic	1.365

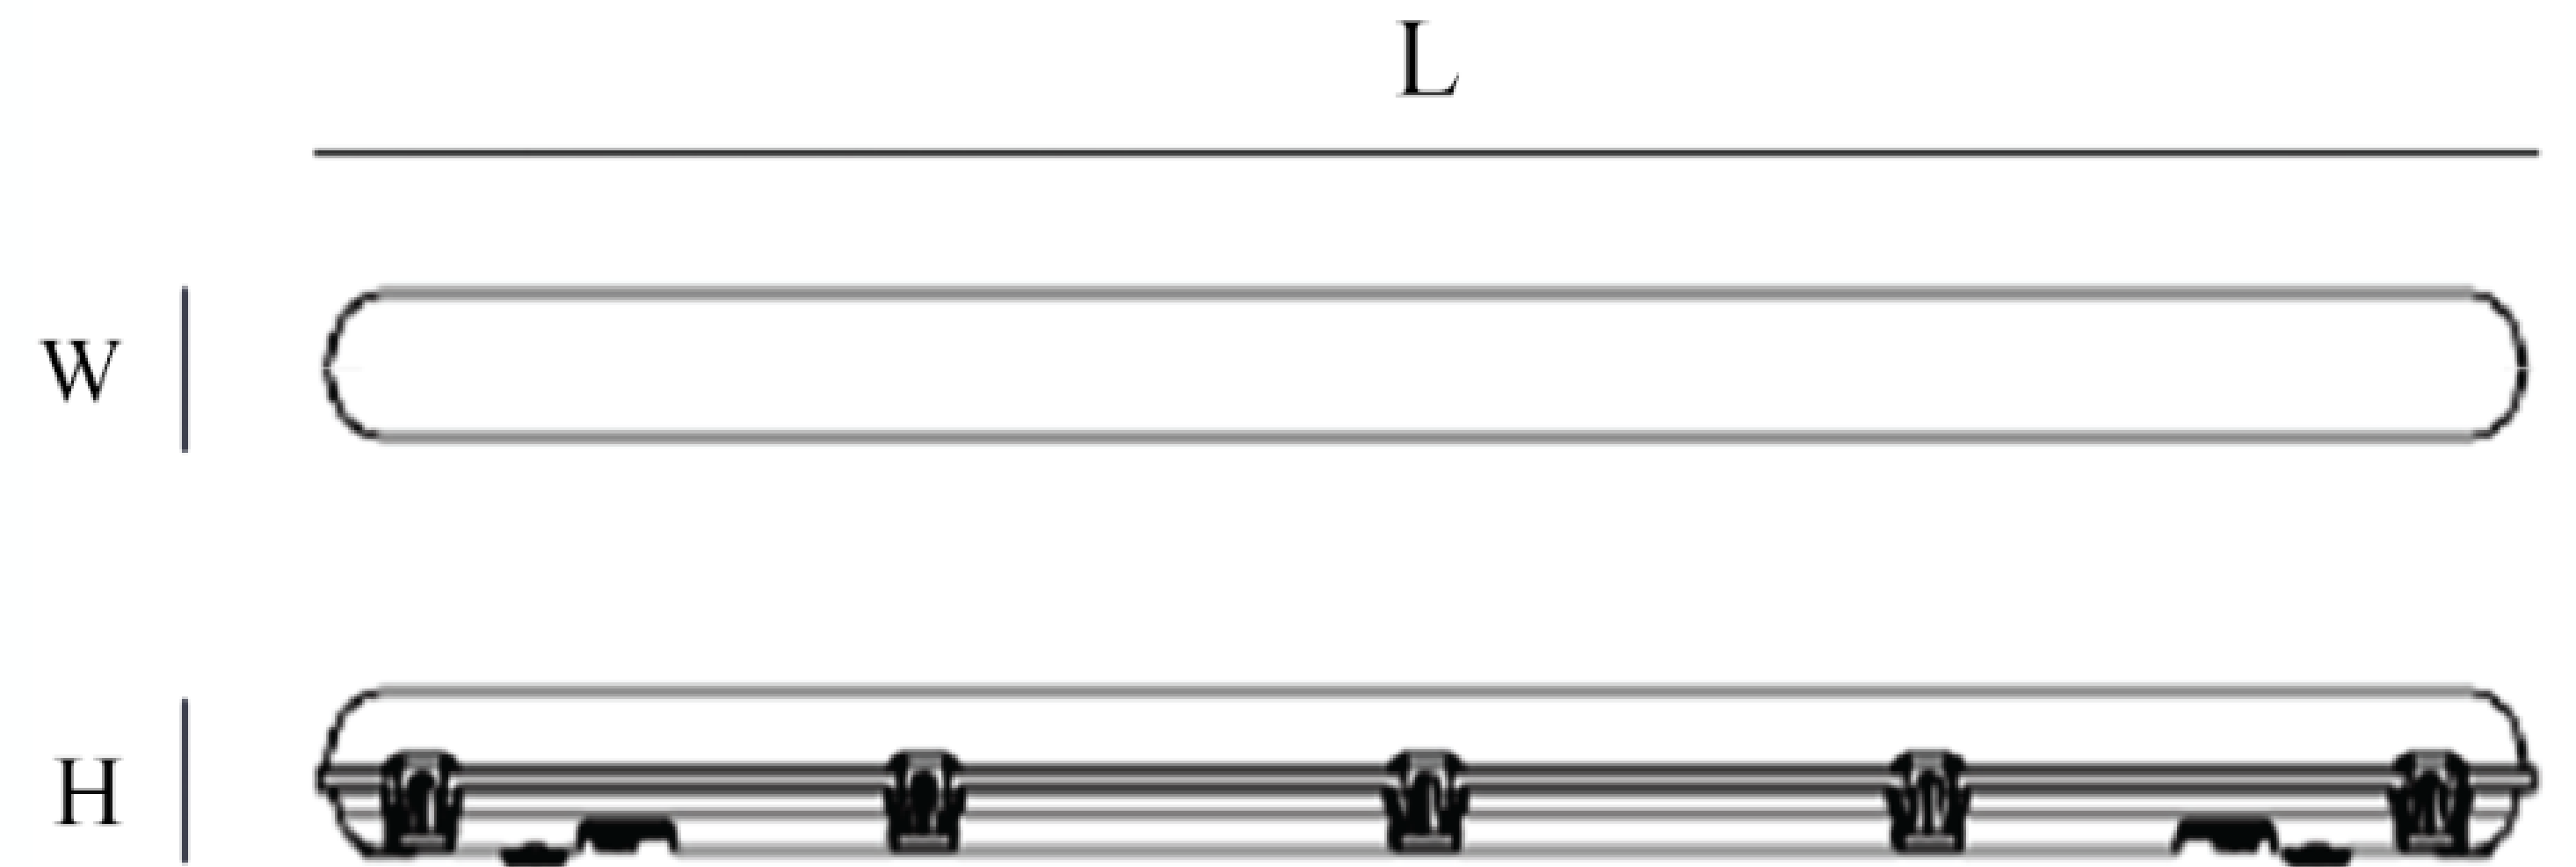

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

