

# EXIT SIGN

SLT-8800



## PERFORMANCE DATA

**Efficacy :** 36 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 60°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Frame Acrylic Legend Panel

**Mounting :** Ceiling Mounted

**Emergency Duration :** > 3 hours


**Viewing Distance :** 25 m

**Protection Class :** IP 40


**Mechanical resistance :** IK 08

**Battery :** 3.6V 900 mAh-12pcs

## OPTICS

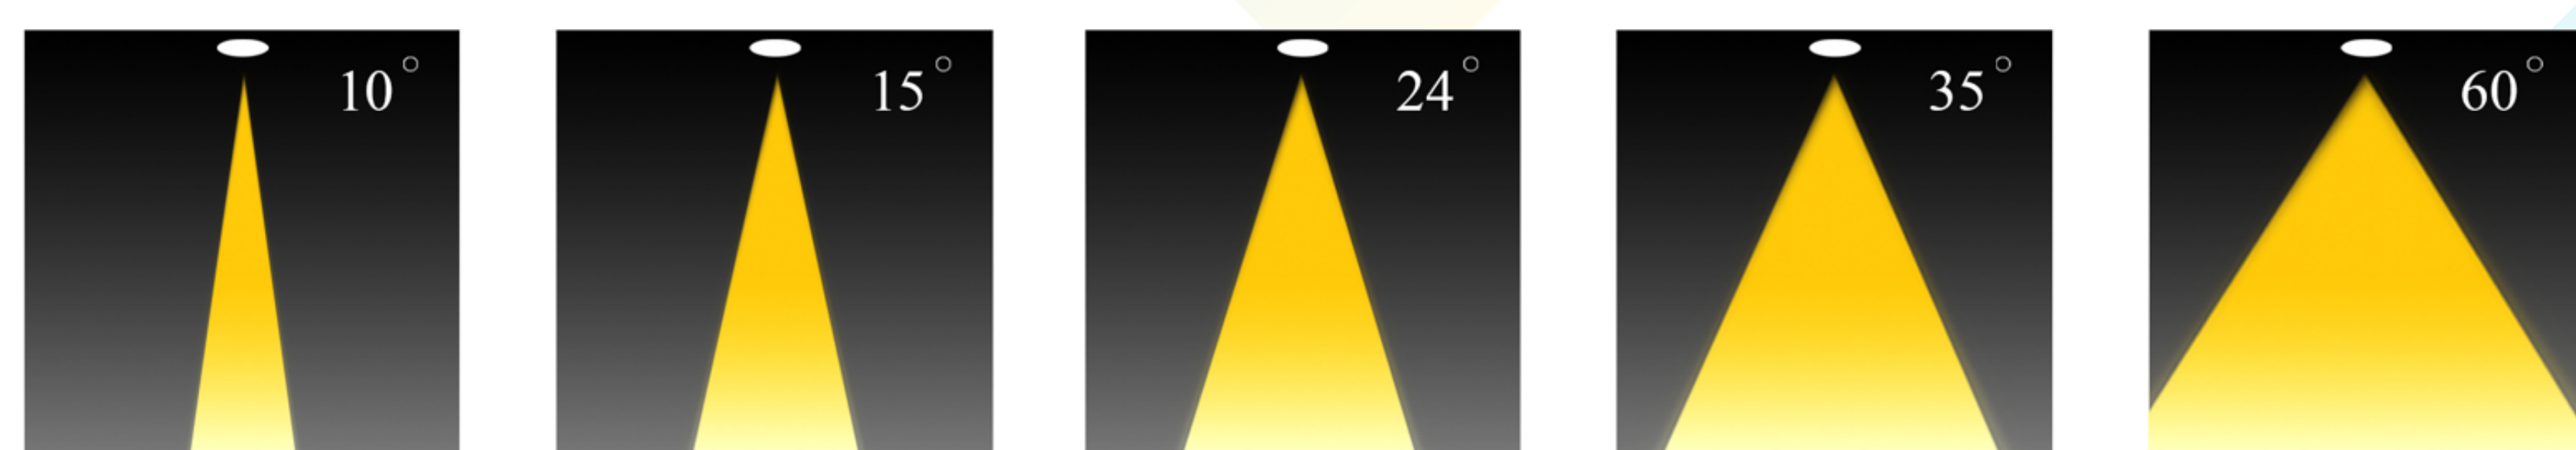

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
8800XX8000CX006	6	36	4000 6500	370*400	Built in Driver	Cree	

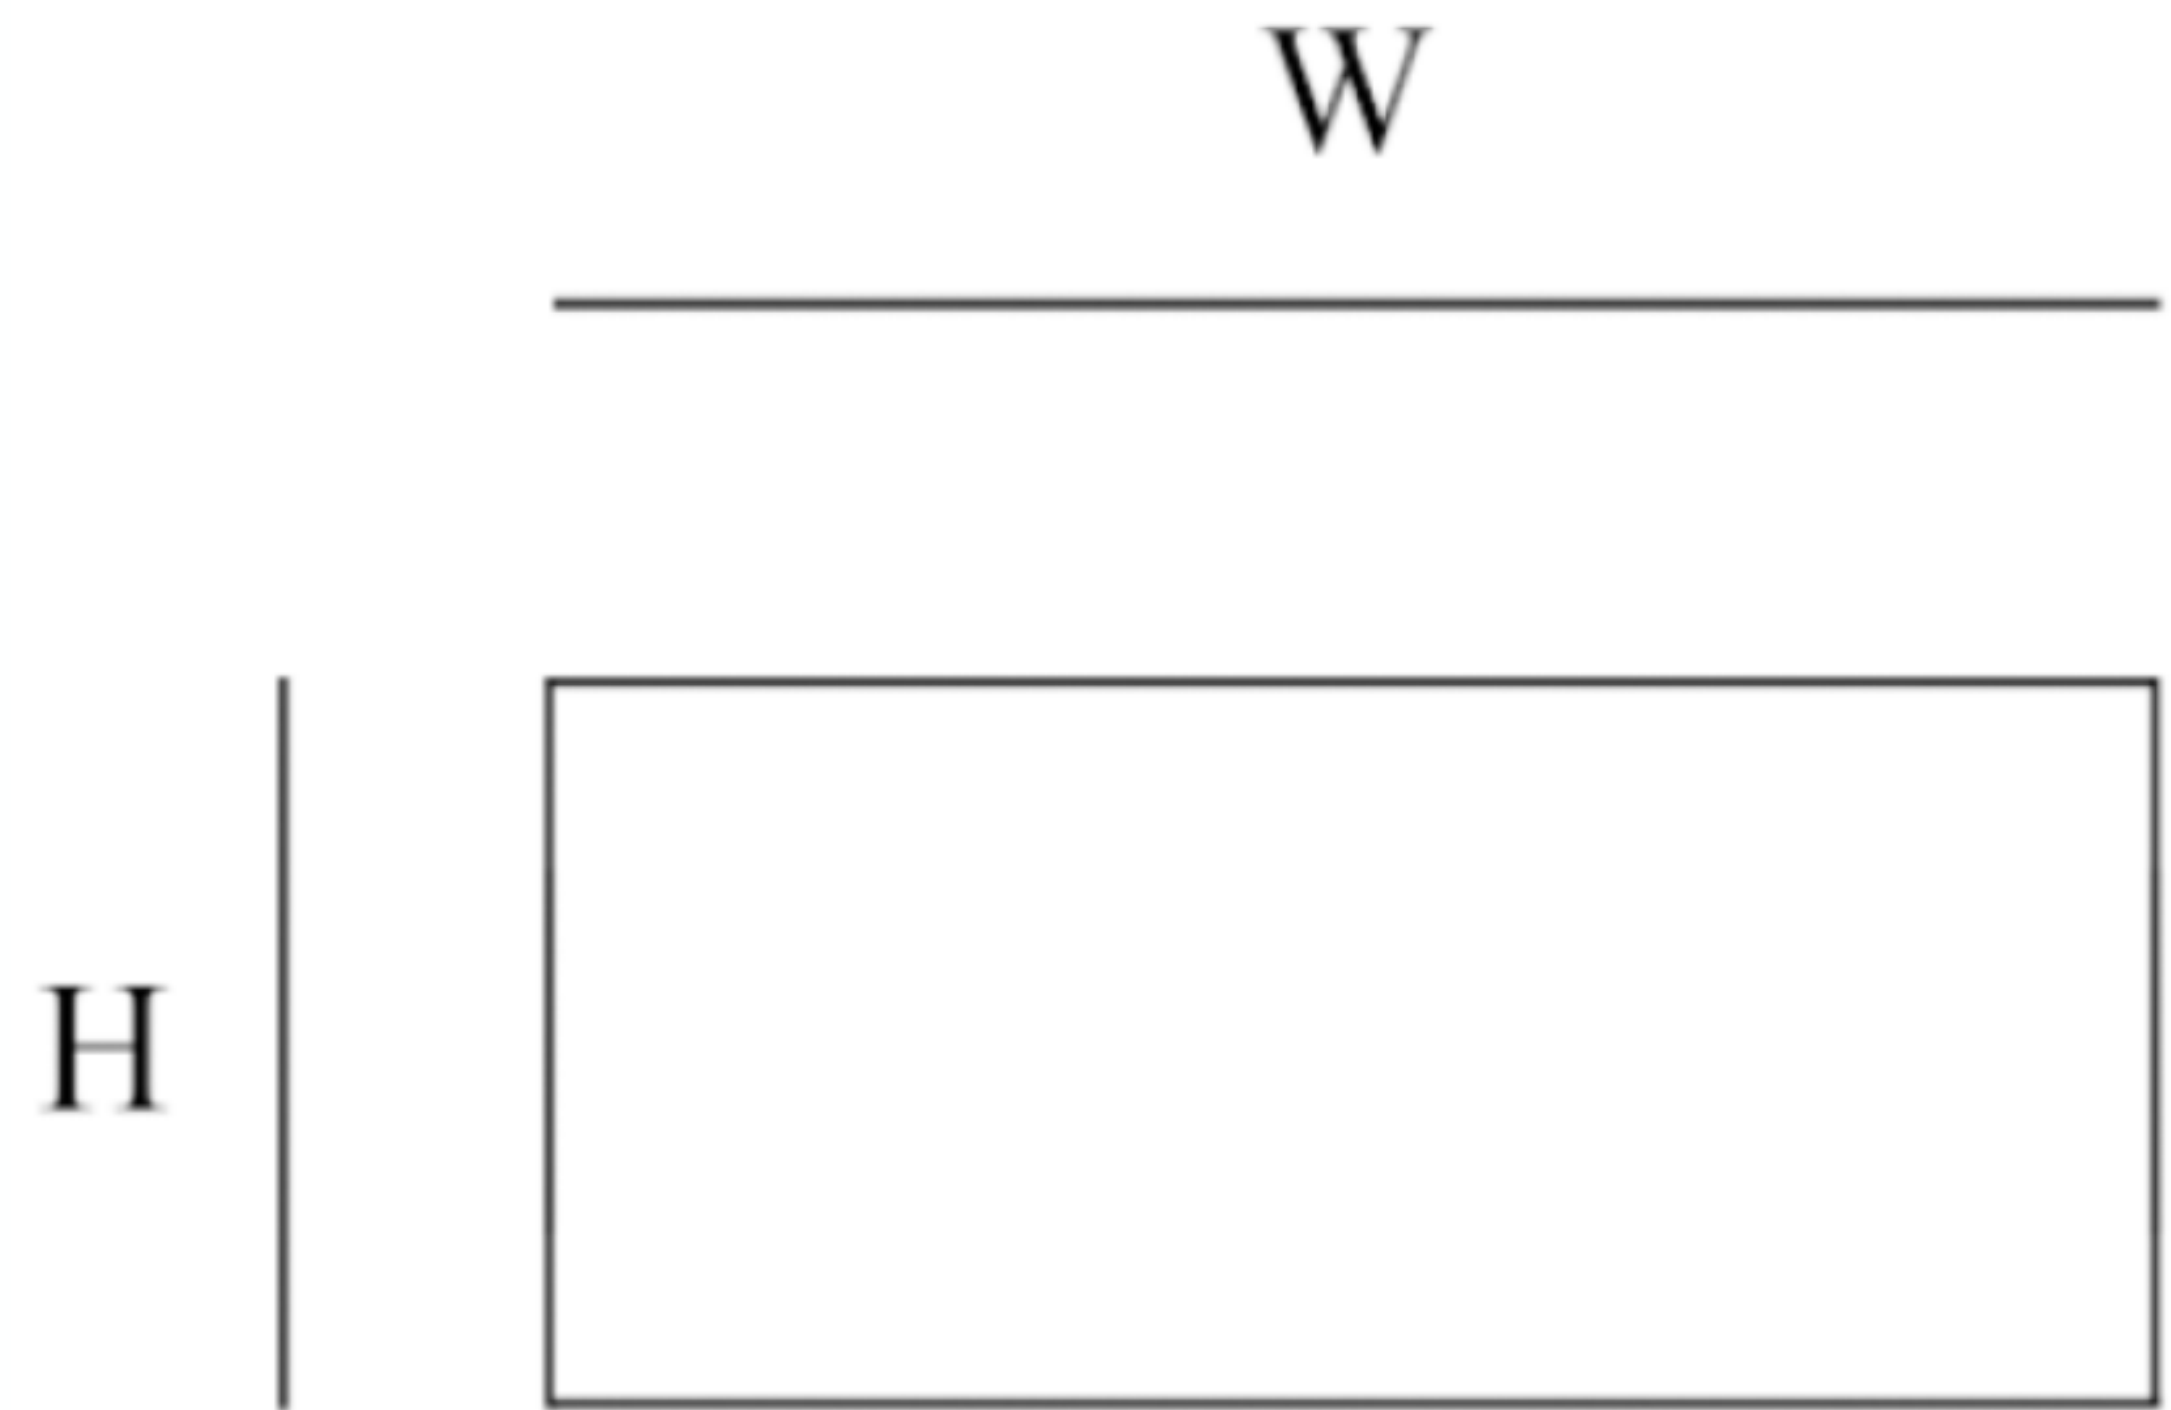

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

