

EXIT SIGN

SLT-8801



PERFORMANCE DATA

Efficacy : 36 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 60°

Class : I

MECHANICAL SPECIFICATIONS

Material : Frame Acrylic Legend Panel

Mounting : Wall/Ceiling Mounted

Emergency Duration : > 3 hours


Viewing Distance : 25 m

Protection Class : IP 40


Mechanical resistance : IK 08

Battery : 3.6V 900 mAh-12pcs

OPTICS

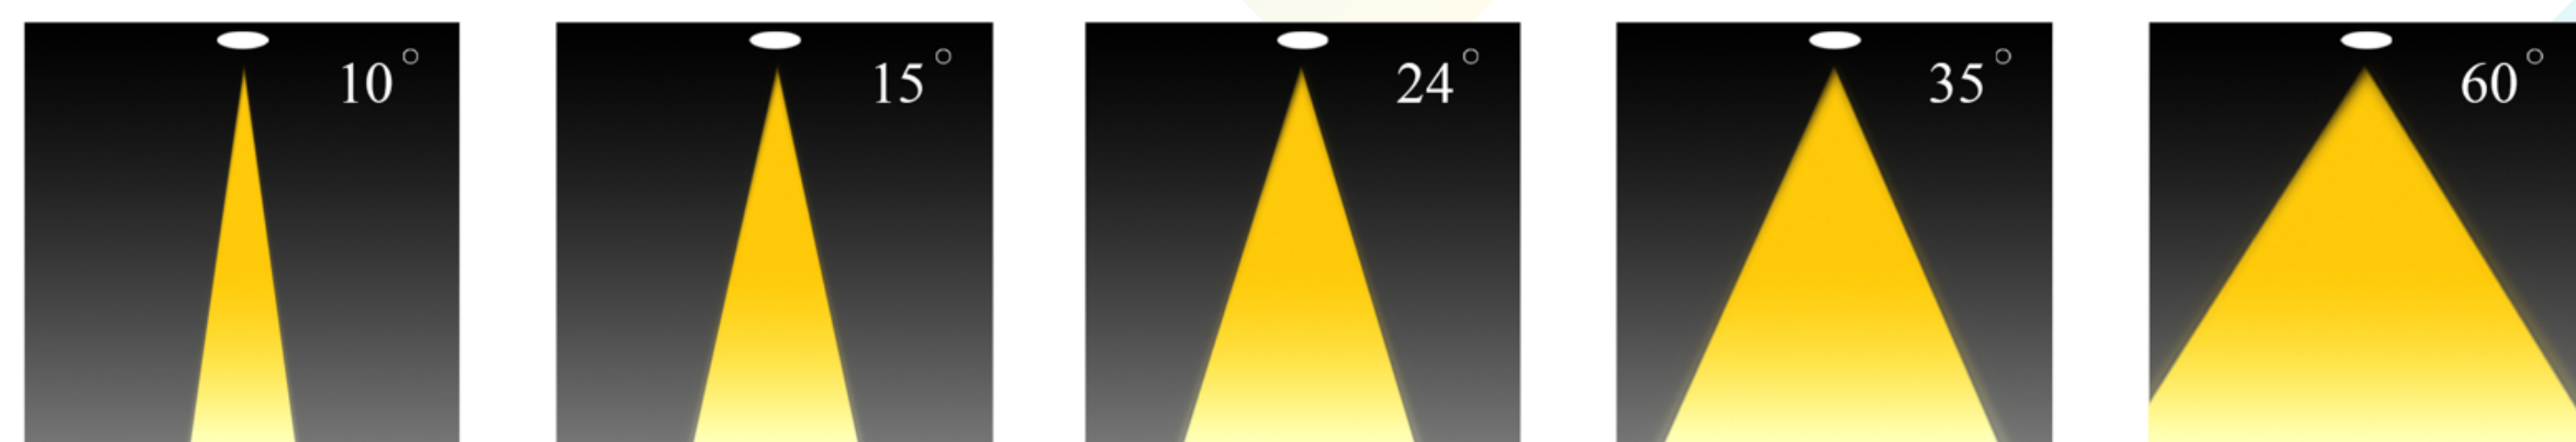

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
8801XX8000XX004	4.3	36	4000 6500		Built in Driver	Cree	

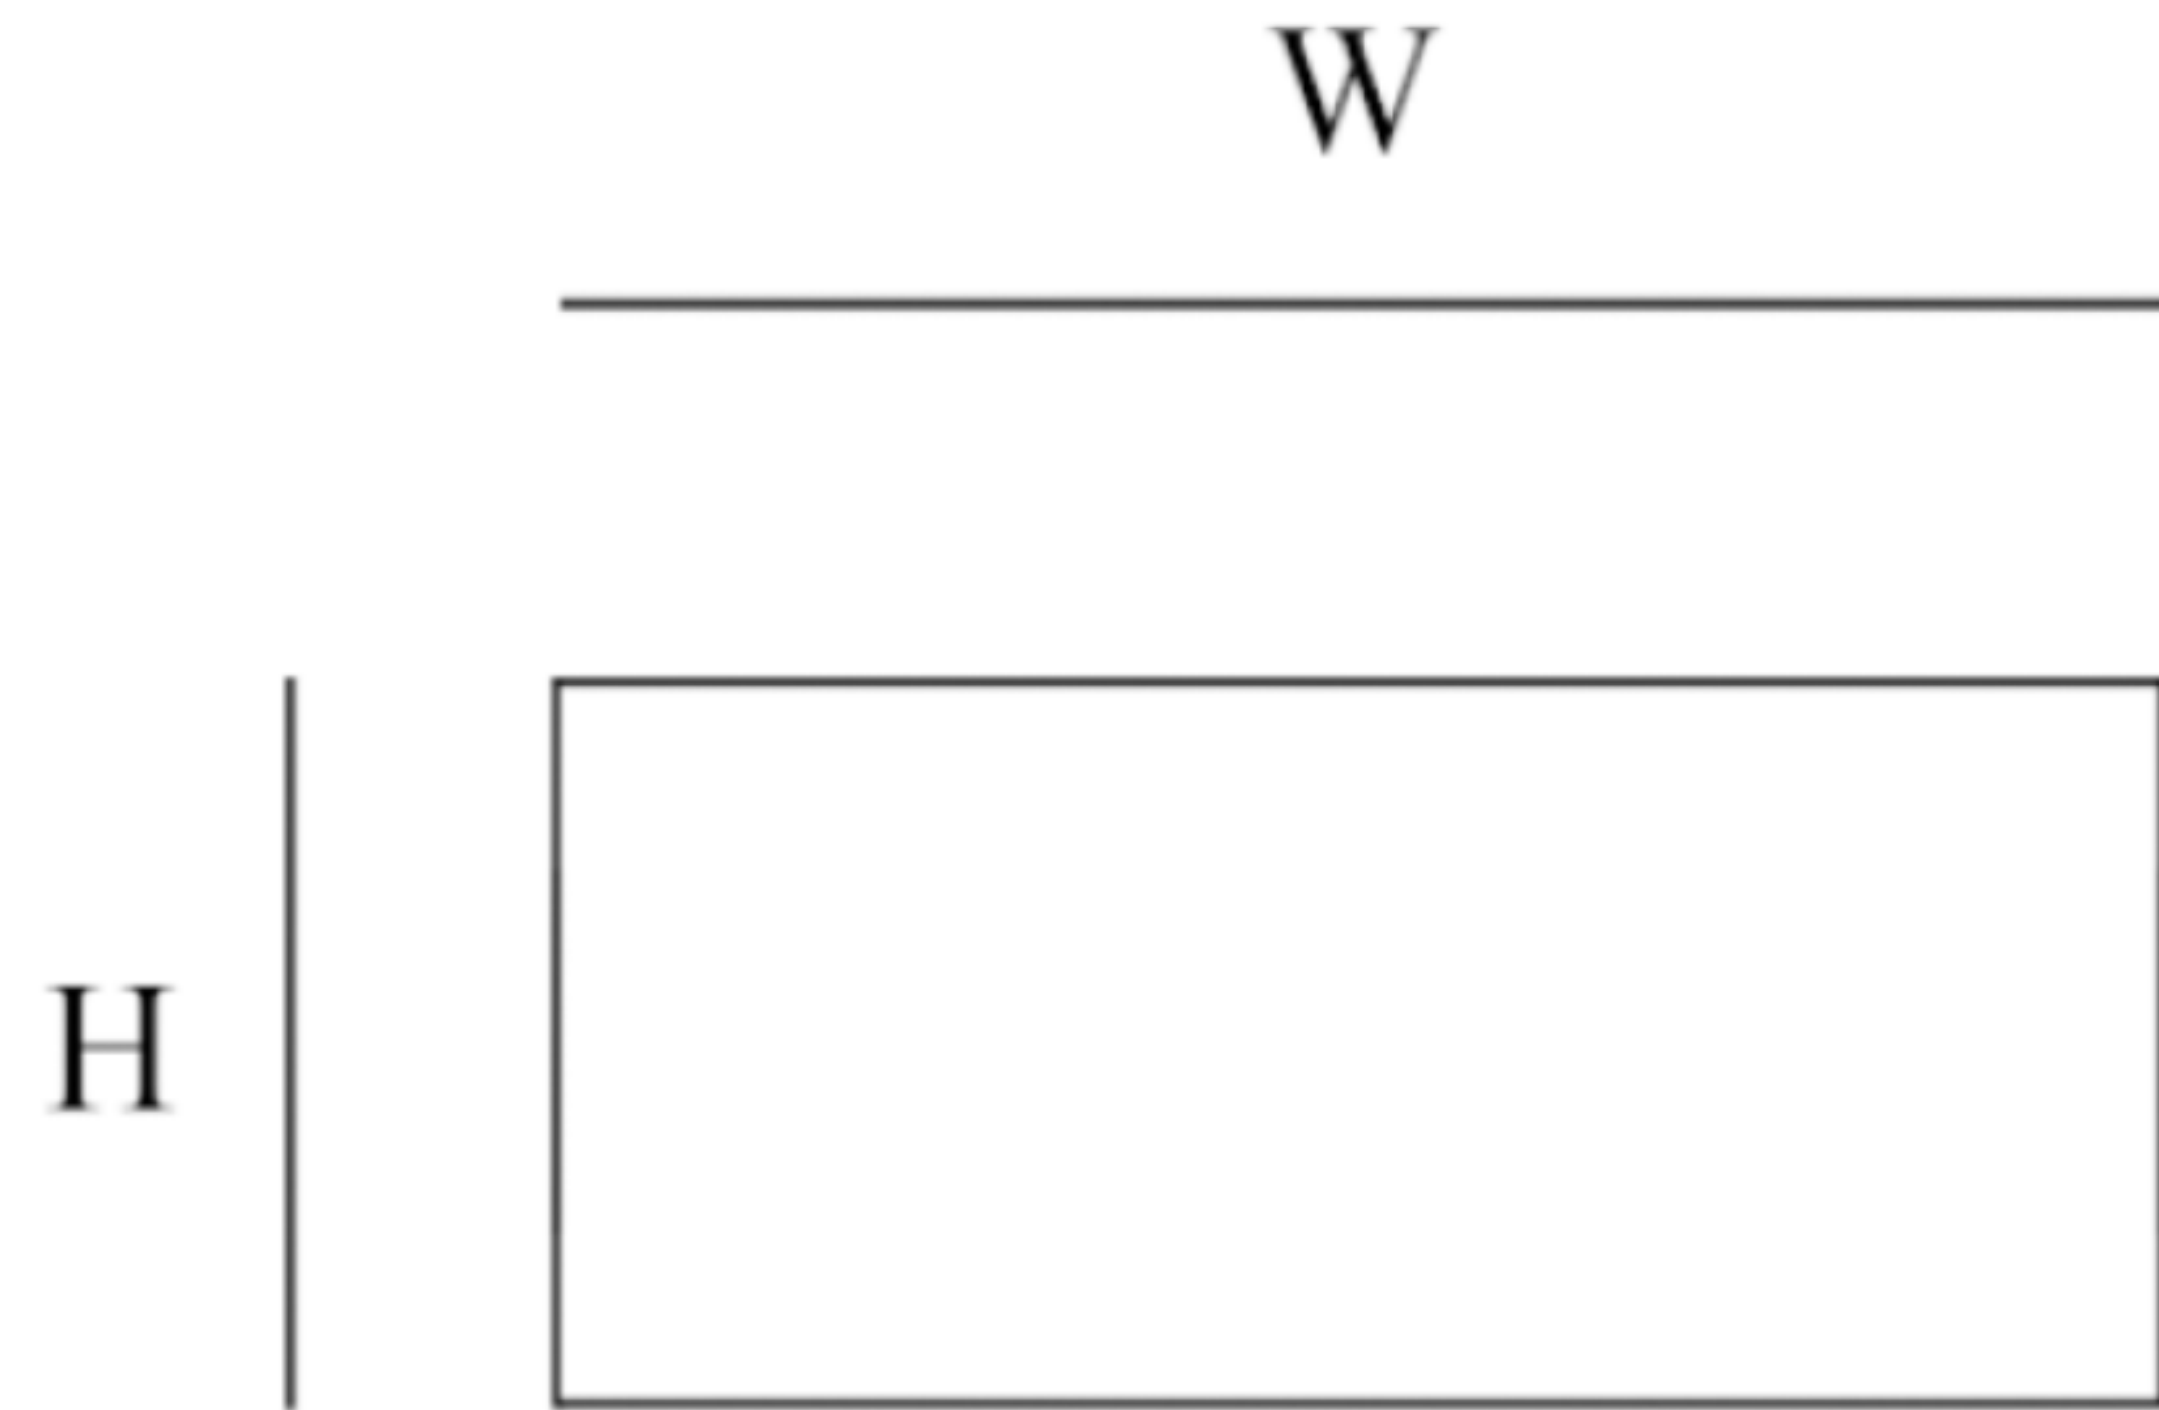

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

