

Bulk Head

SLT-B03



PERFORMANCE DATA

Efficacy : 80 Lm/W

Input Voltage : 220-240VAC

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 120 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Aluminum & Plastic

Mounting : Surface / Wall Mounted


Lens : Plastic

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 03

OPTICS

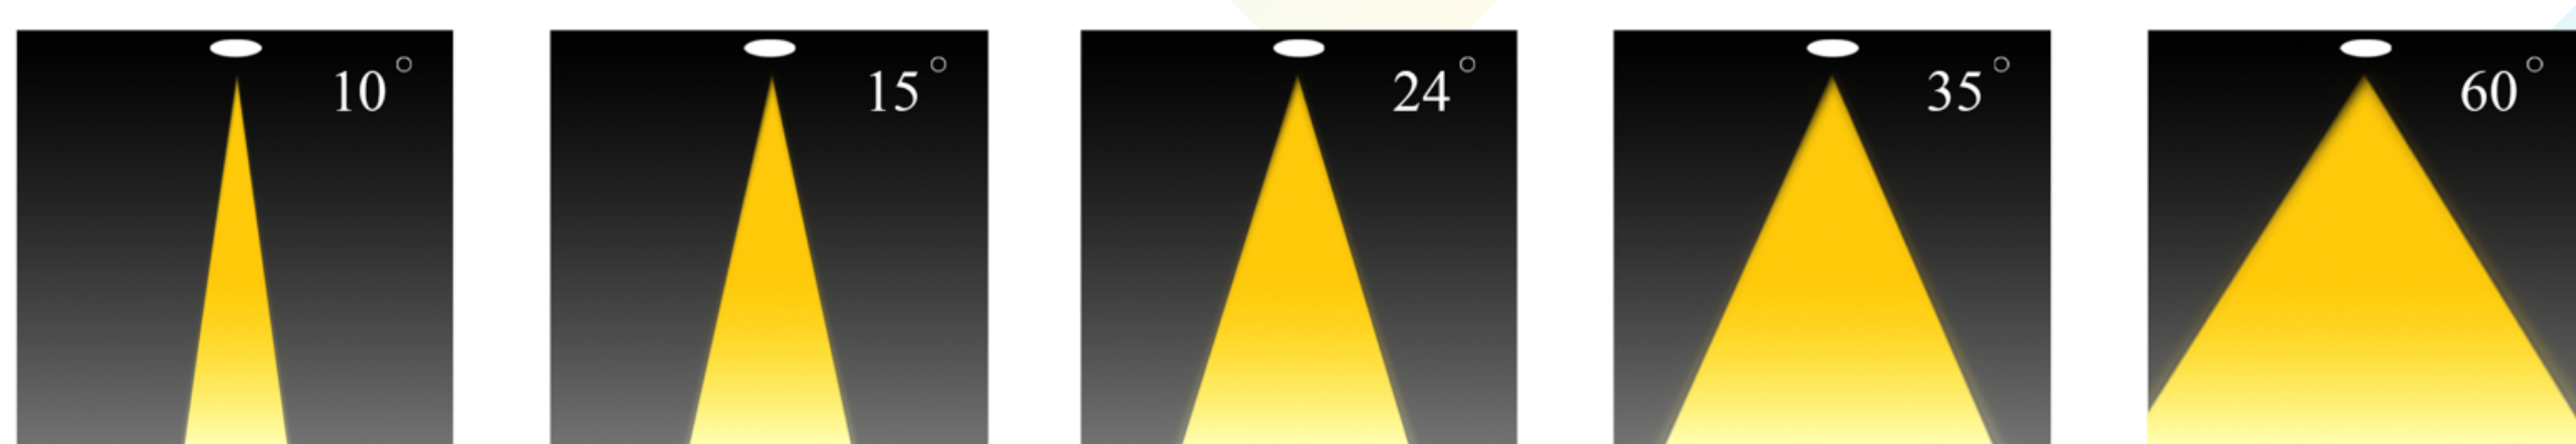

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions LxWxH mm	Driver	LED Chip	Weight Kg
B032308XXXLX013	13	80	3000	280x182x85 mm	CE El-Sewedy	Lumiled	

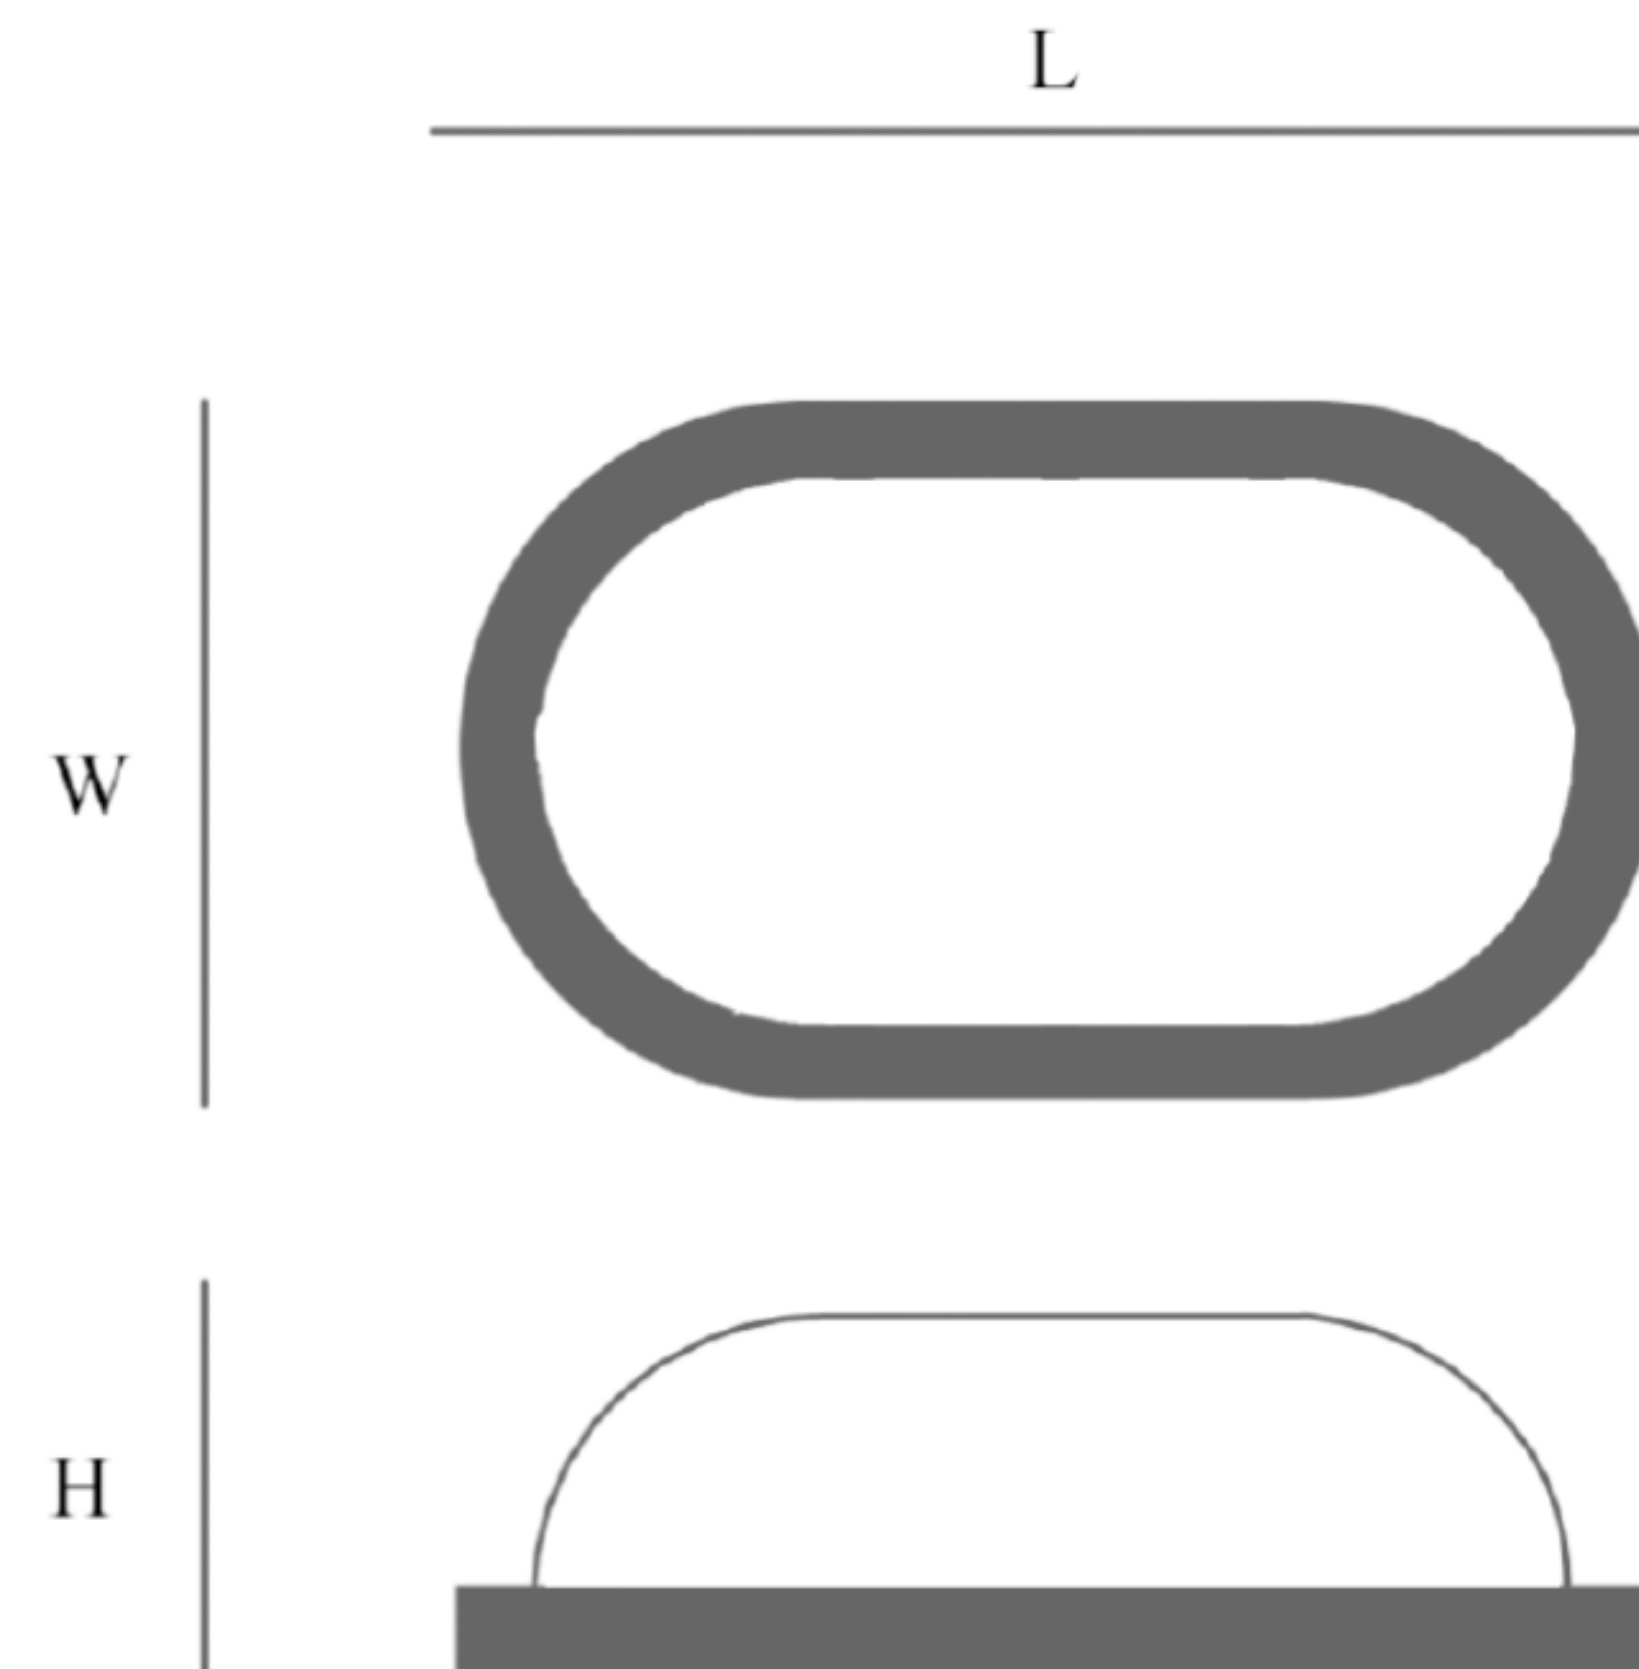

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

