


# Bollard

SLT-BL10

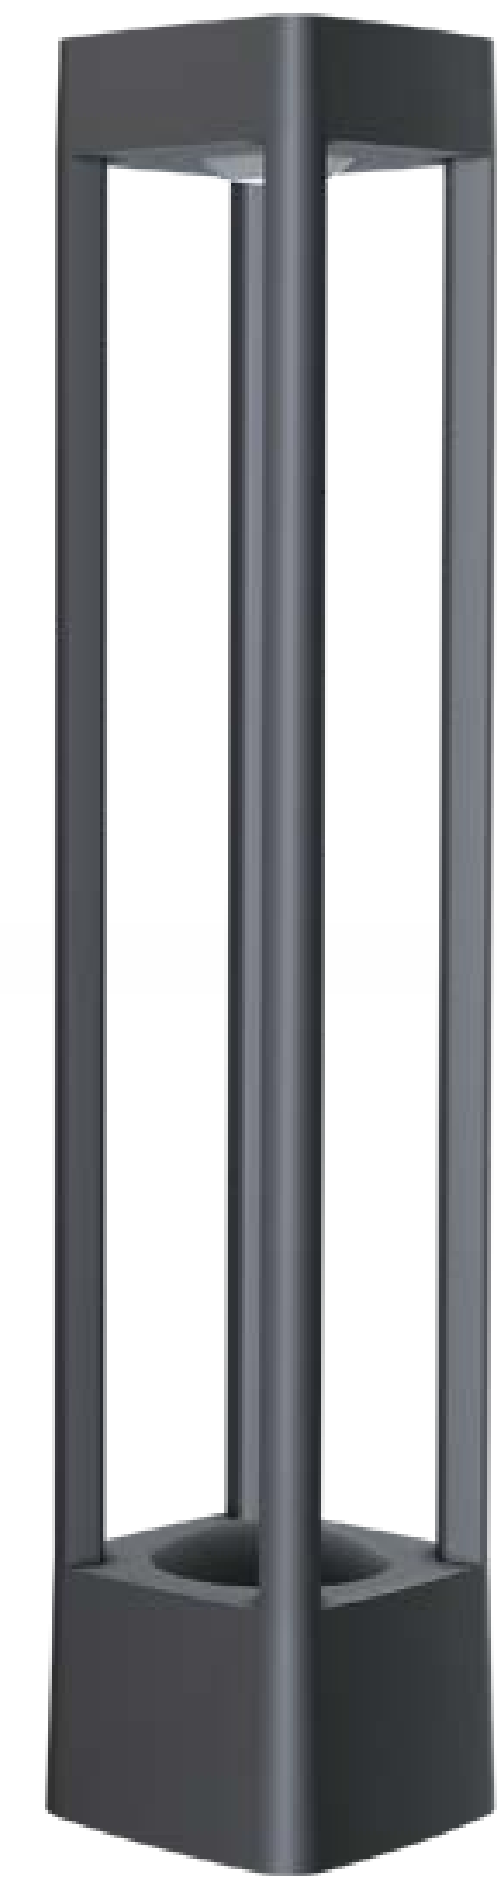

## PERFORMANCE DATA

**Efficacy :** 110 Lm/W

**Input Voltage :** 220V AC

**Frequency :** 50 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 120°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminium

**Mounting :** In-Ground


**Lens :** Glass

**Finish :** Gray

**Protection Class :** IP 65


**Mechanical Resistance :** IK 08

## OPTICS

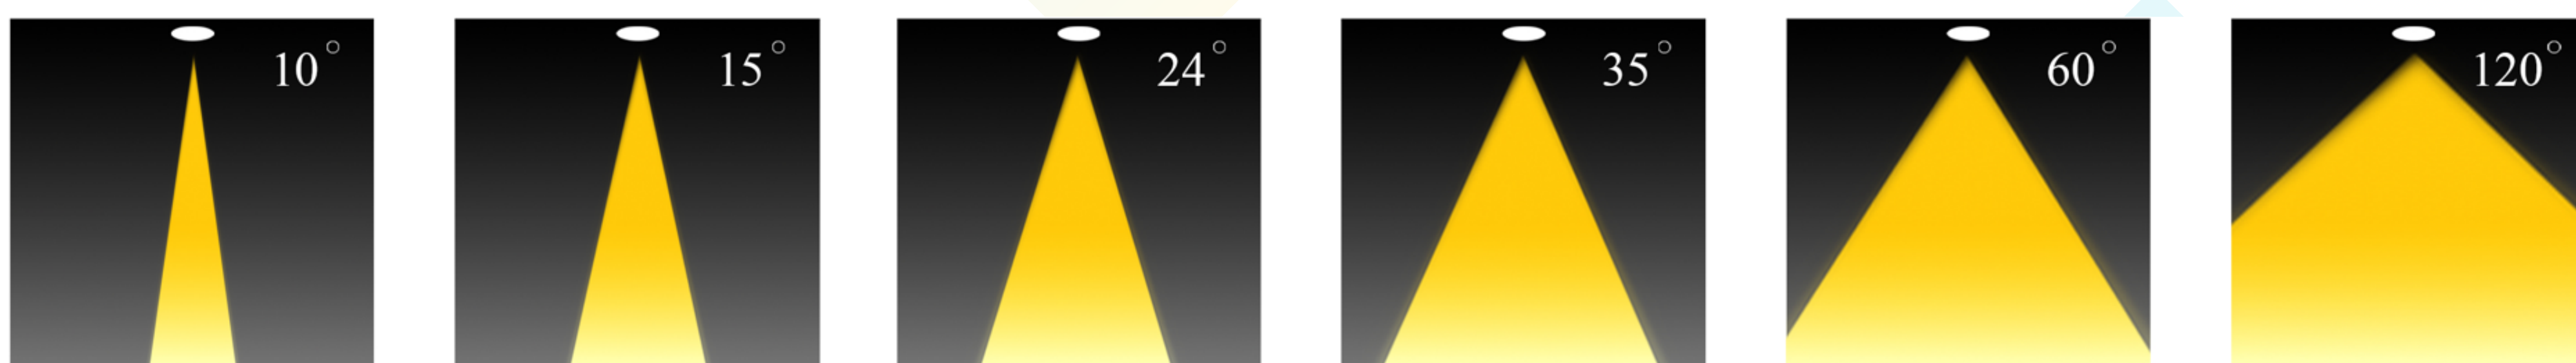



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions L×W×H mm	Driver	LED Chip
B102308120BE0XXXXX120	15 20	110	3000	120×120×1000	Eagle rise	Bridgelux

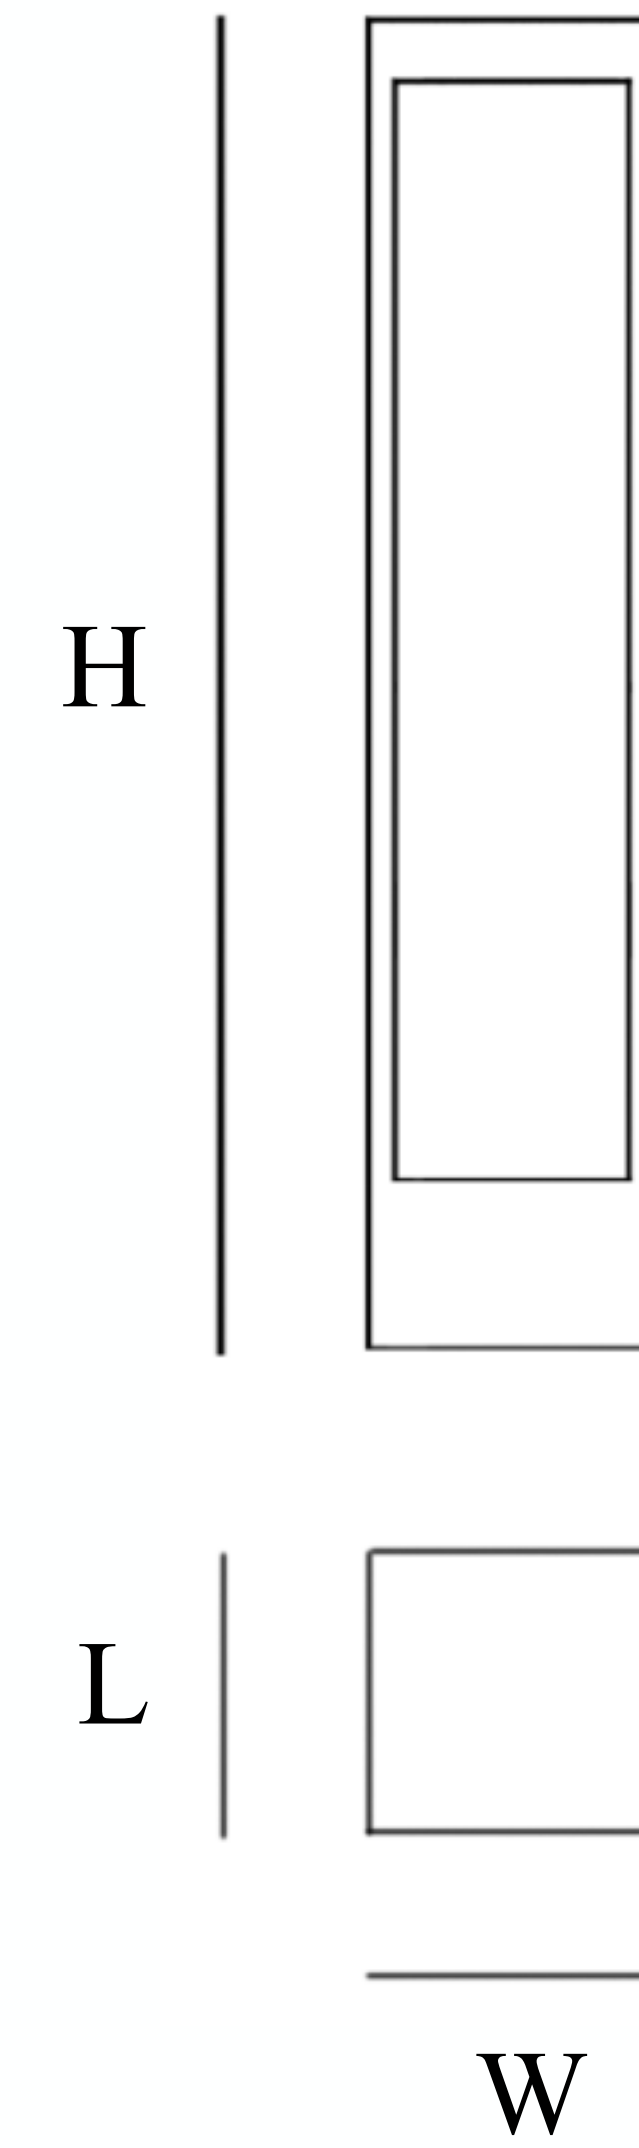

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

