

# Bollard

SLT-BL11



## PERFORMANCE DATA

**Efficacy :** 90 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 120°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminium

**Mounting :** In-Ground



**Lens :** Opal

**Finish :** White & Black


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

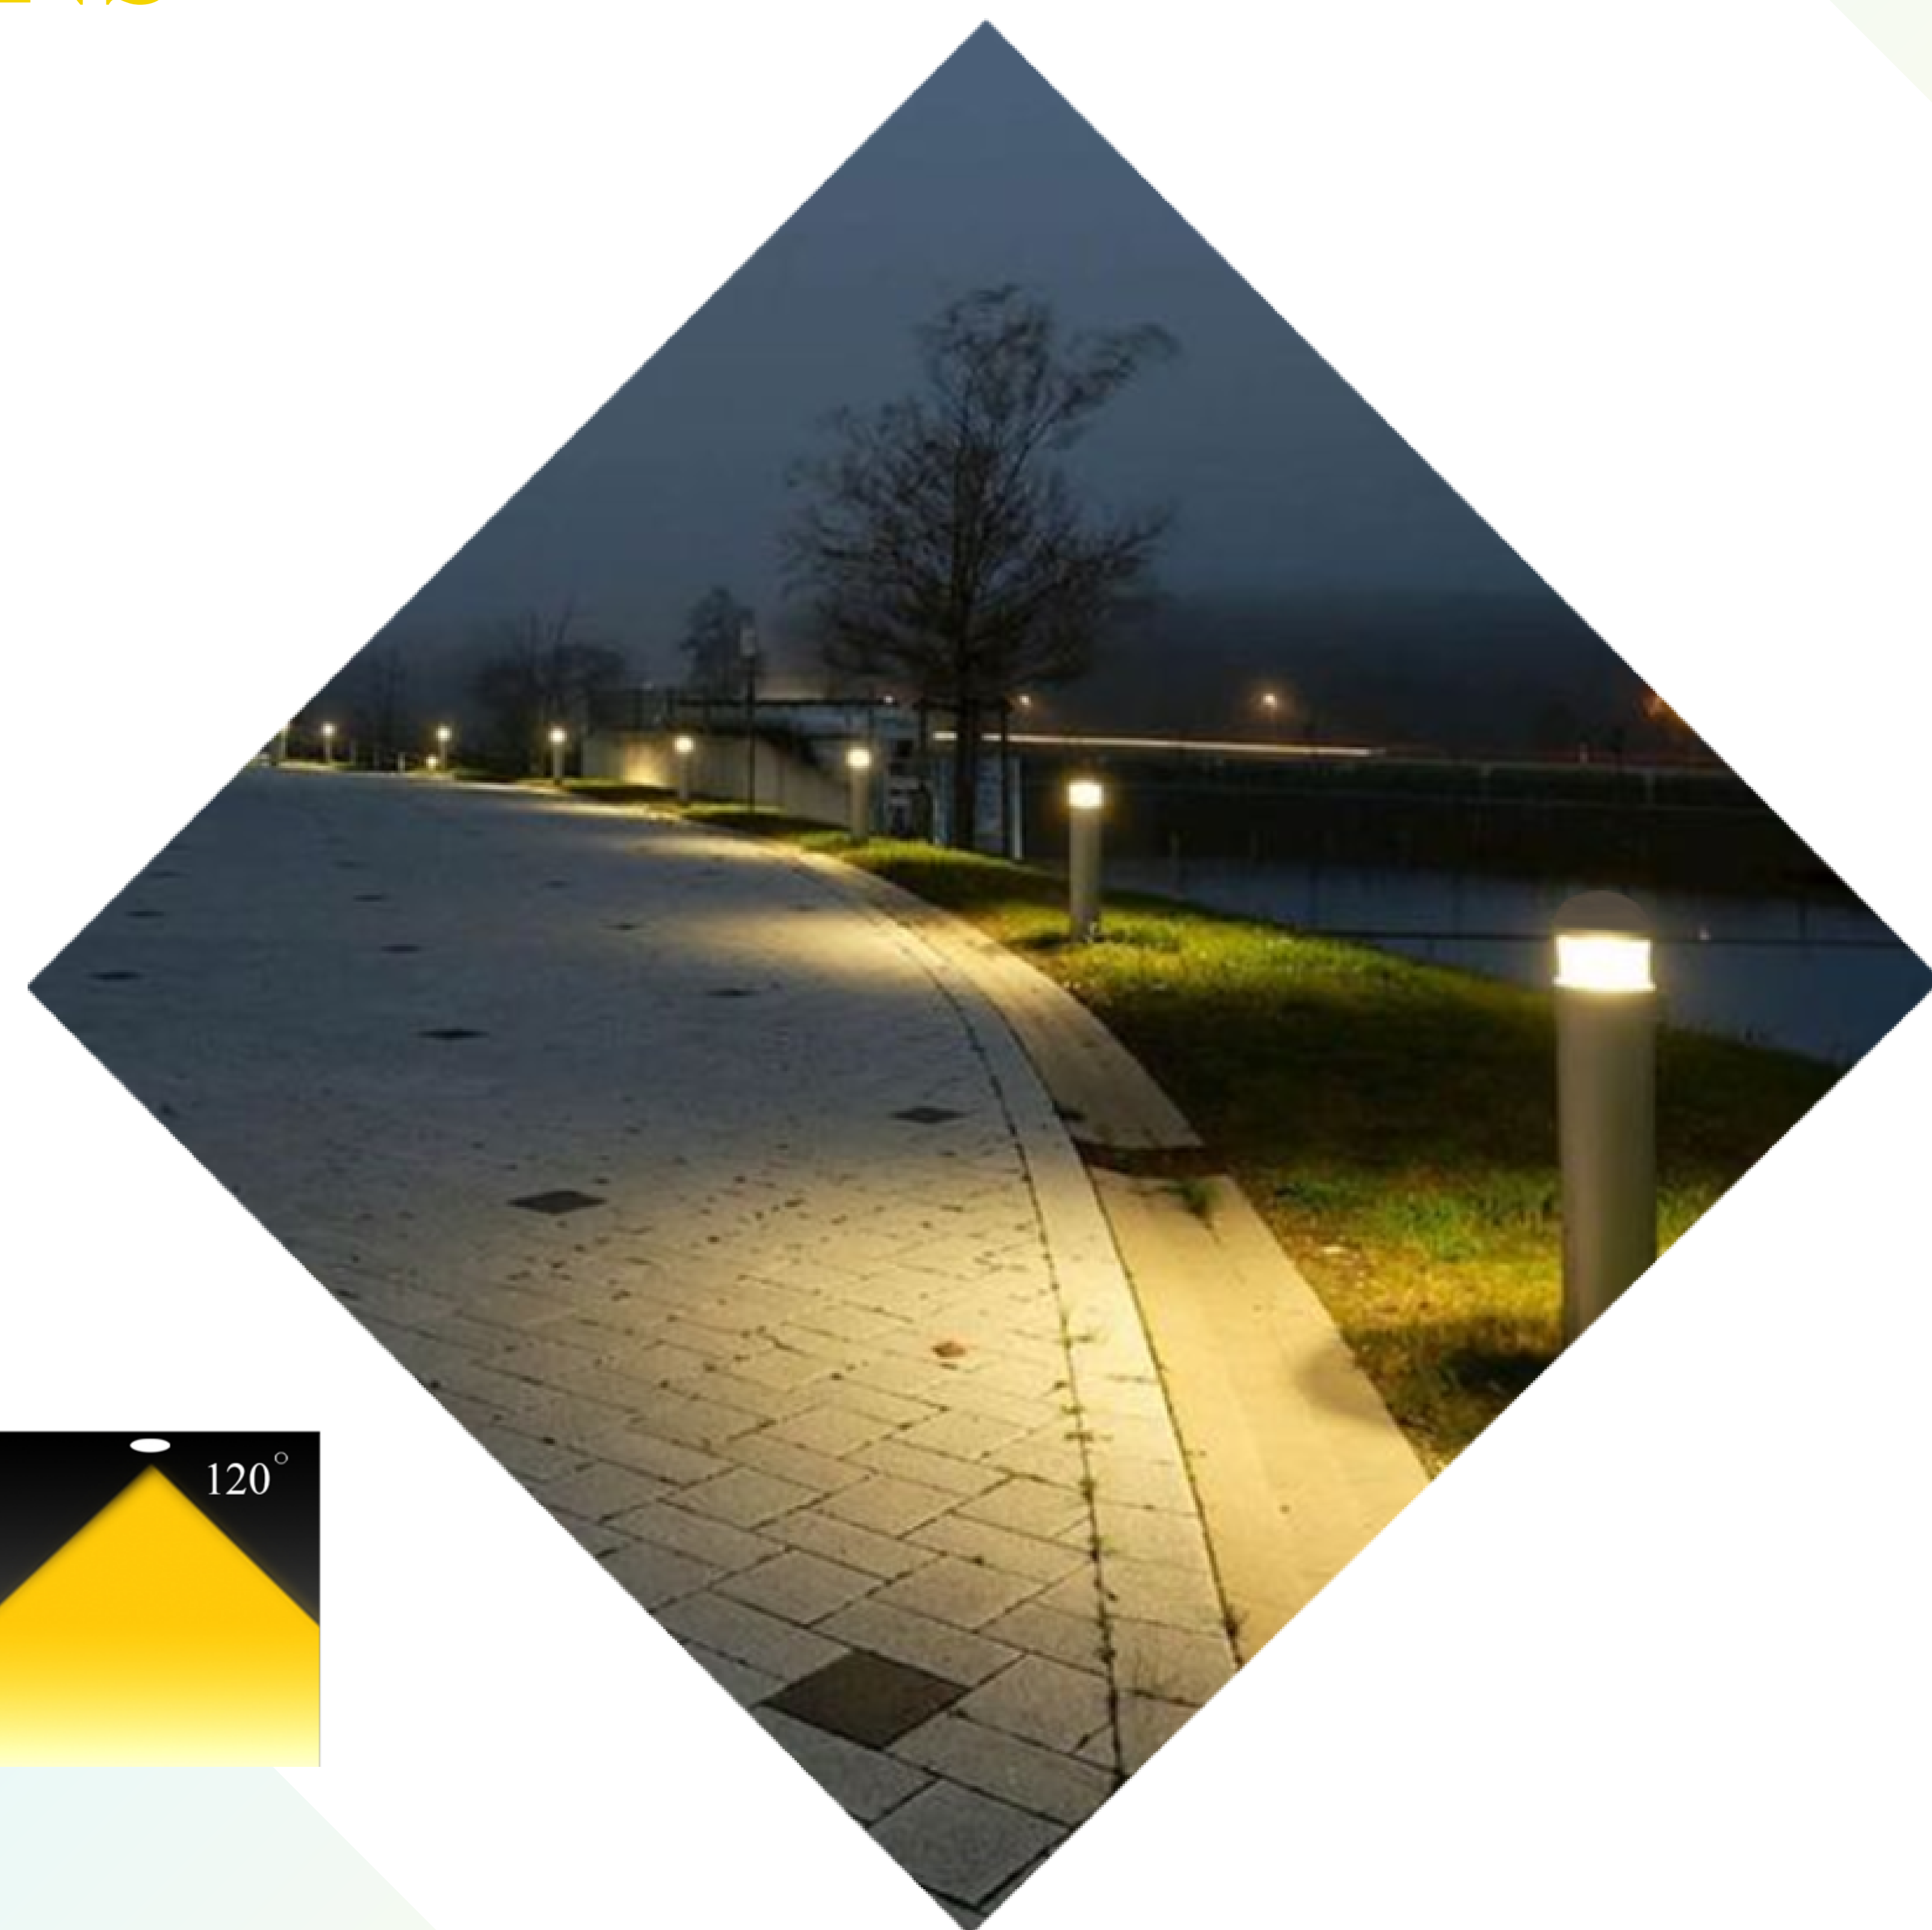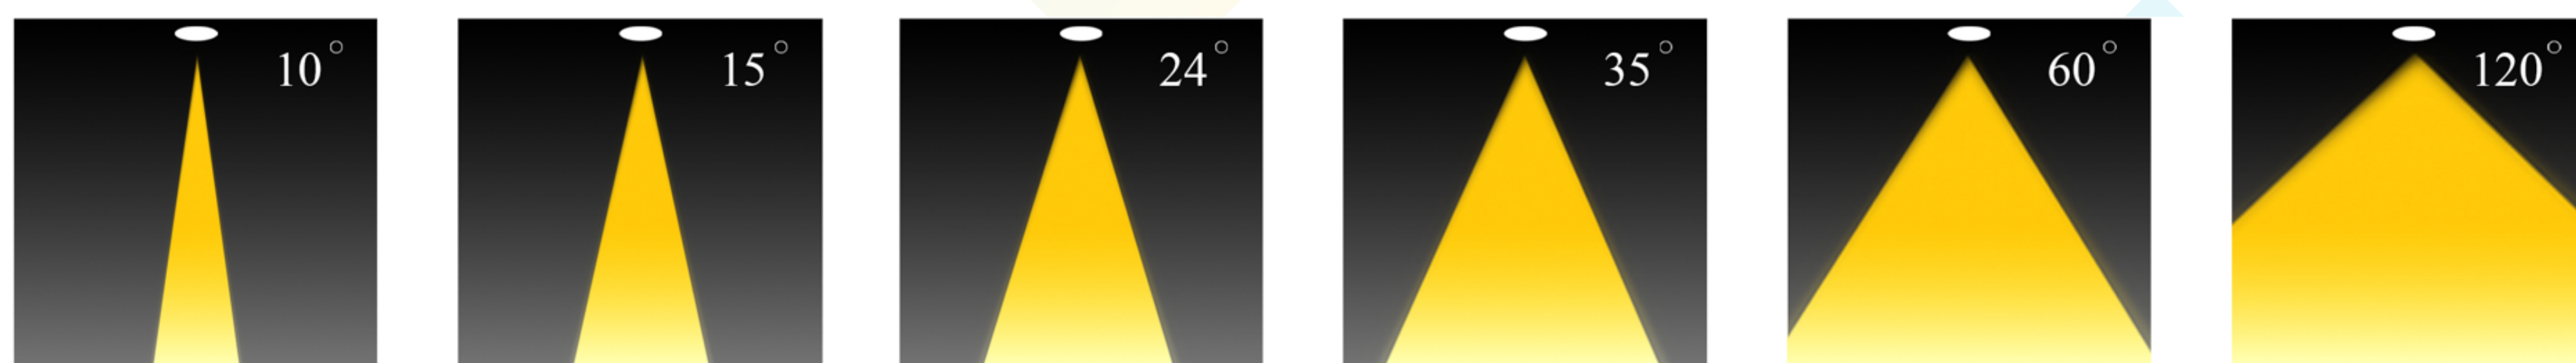

Code	Power W	Efficacy	Colour Temp. K	Dimensions H - mm	Driver	LED Chip
B102008120000001000	9 12 15	90	3000 4000 6000	1000 mm	N/A	E27

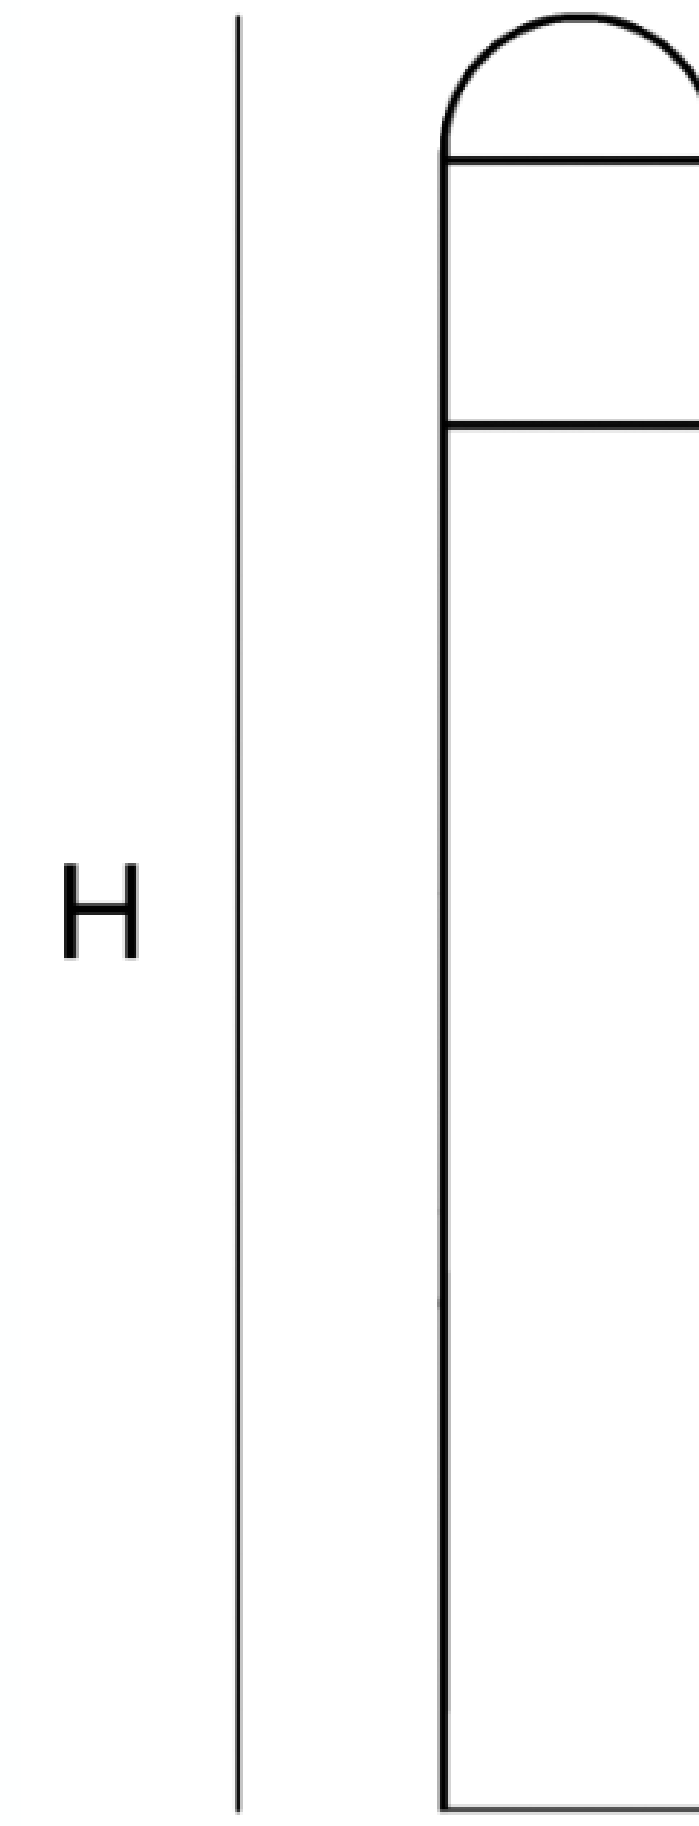

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

IK10

## POLAR CURVE

