

Bollard

SLT-BL13



PERFORMANCE DATA

Efficacy : 55 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 90°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminium

Mounting : In-Ground


Lens : Opal

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

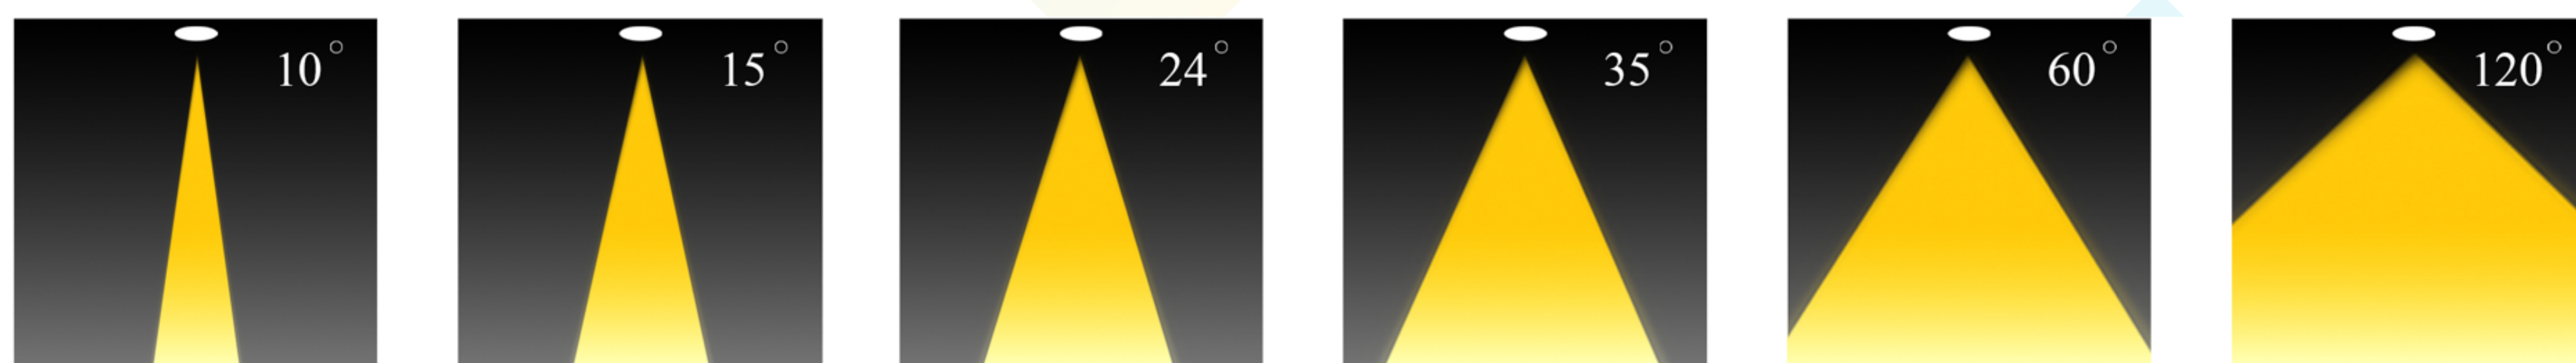

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions H - mm	Driver	LED Chip
BL132308120XXXXX	10 12 15 20	55	3000	1000 mm	Meanwell Eaglerise Inventronics	Cree VS

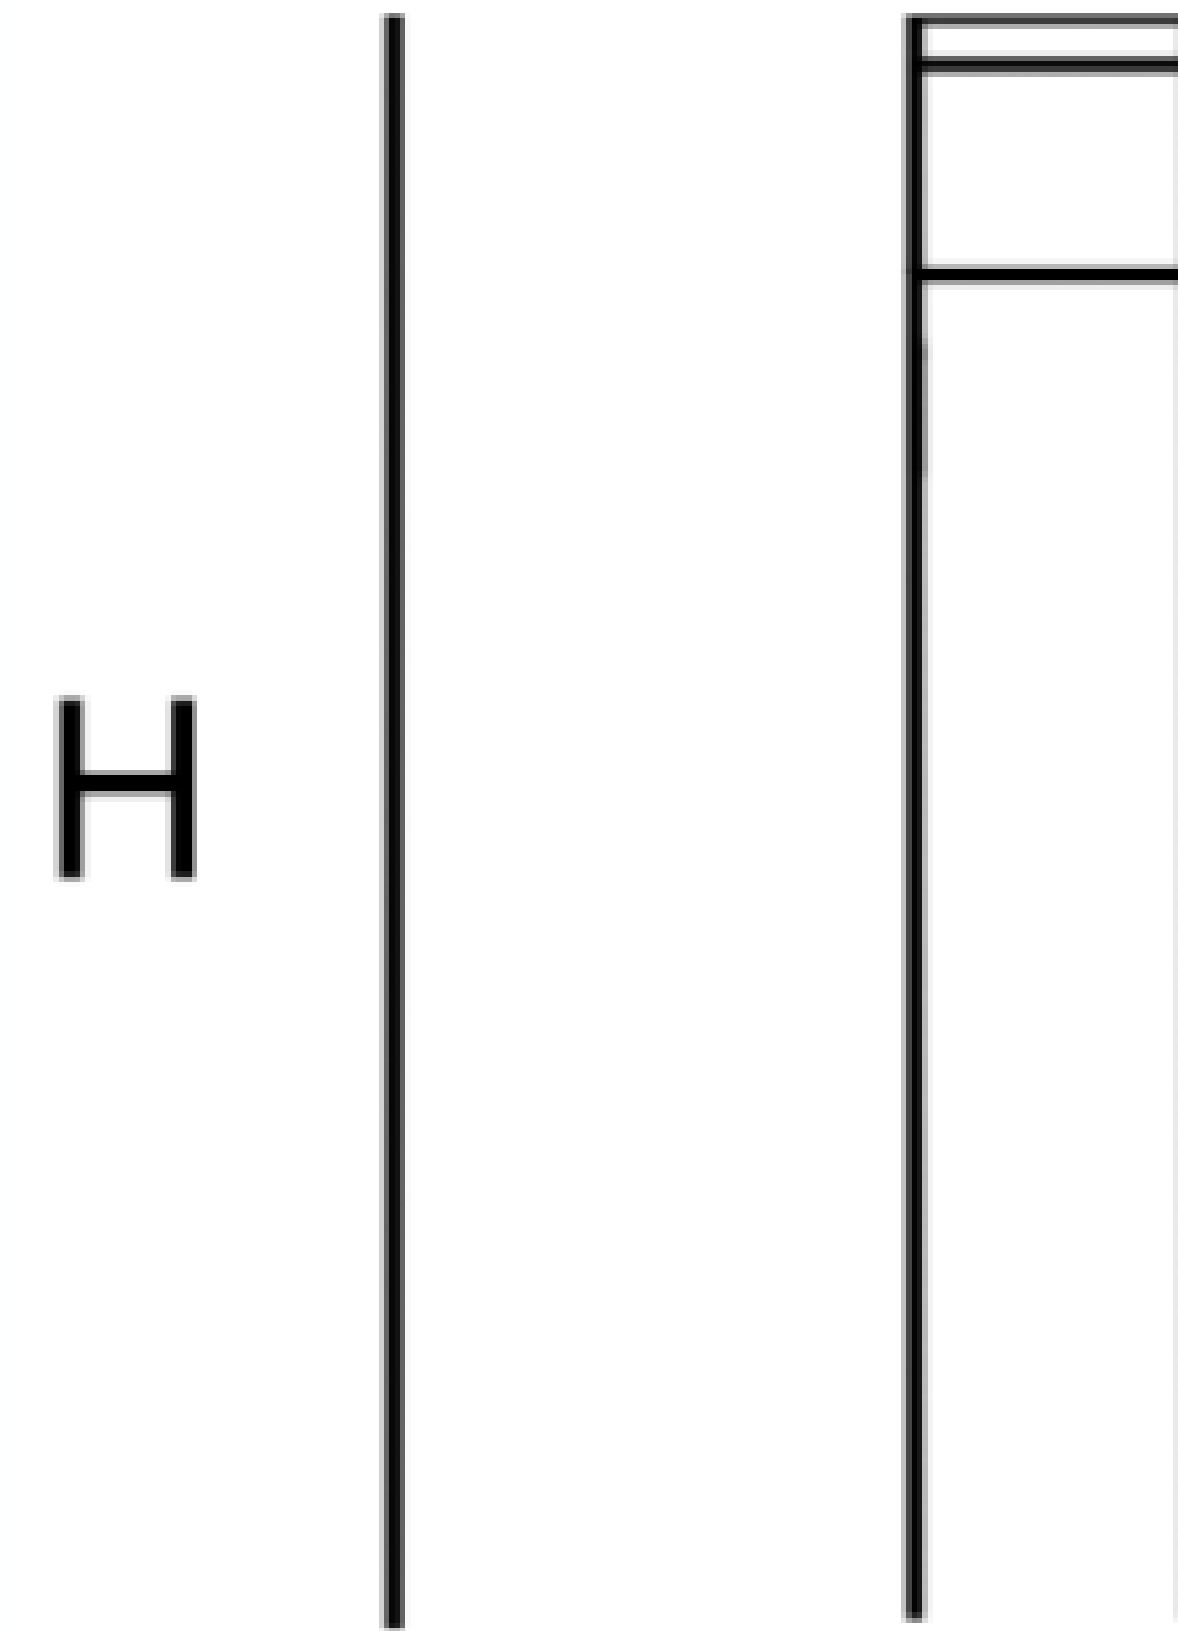

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

