

# Bollard

SLT-BL14



## PERFORMANCE DATA

**Efficacy :** 110 Lm/W

**Input Voltage :** 220 V

**Frequency :** 50 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 120°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminium

**Mounting :** In-Ground



**Lens :** Opal

**Finish :** Gray


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

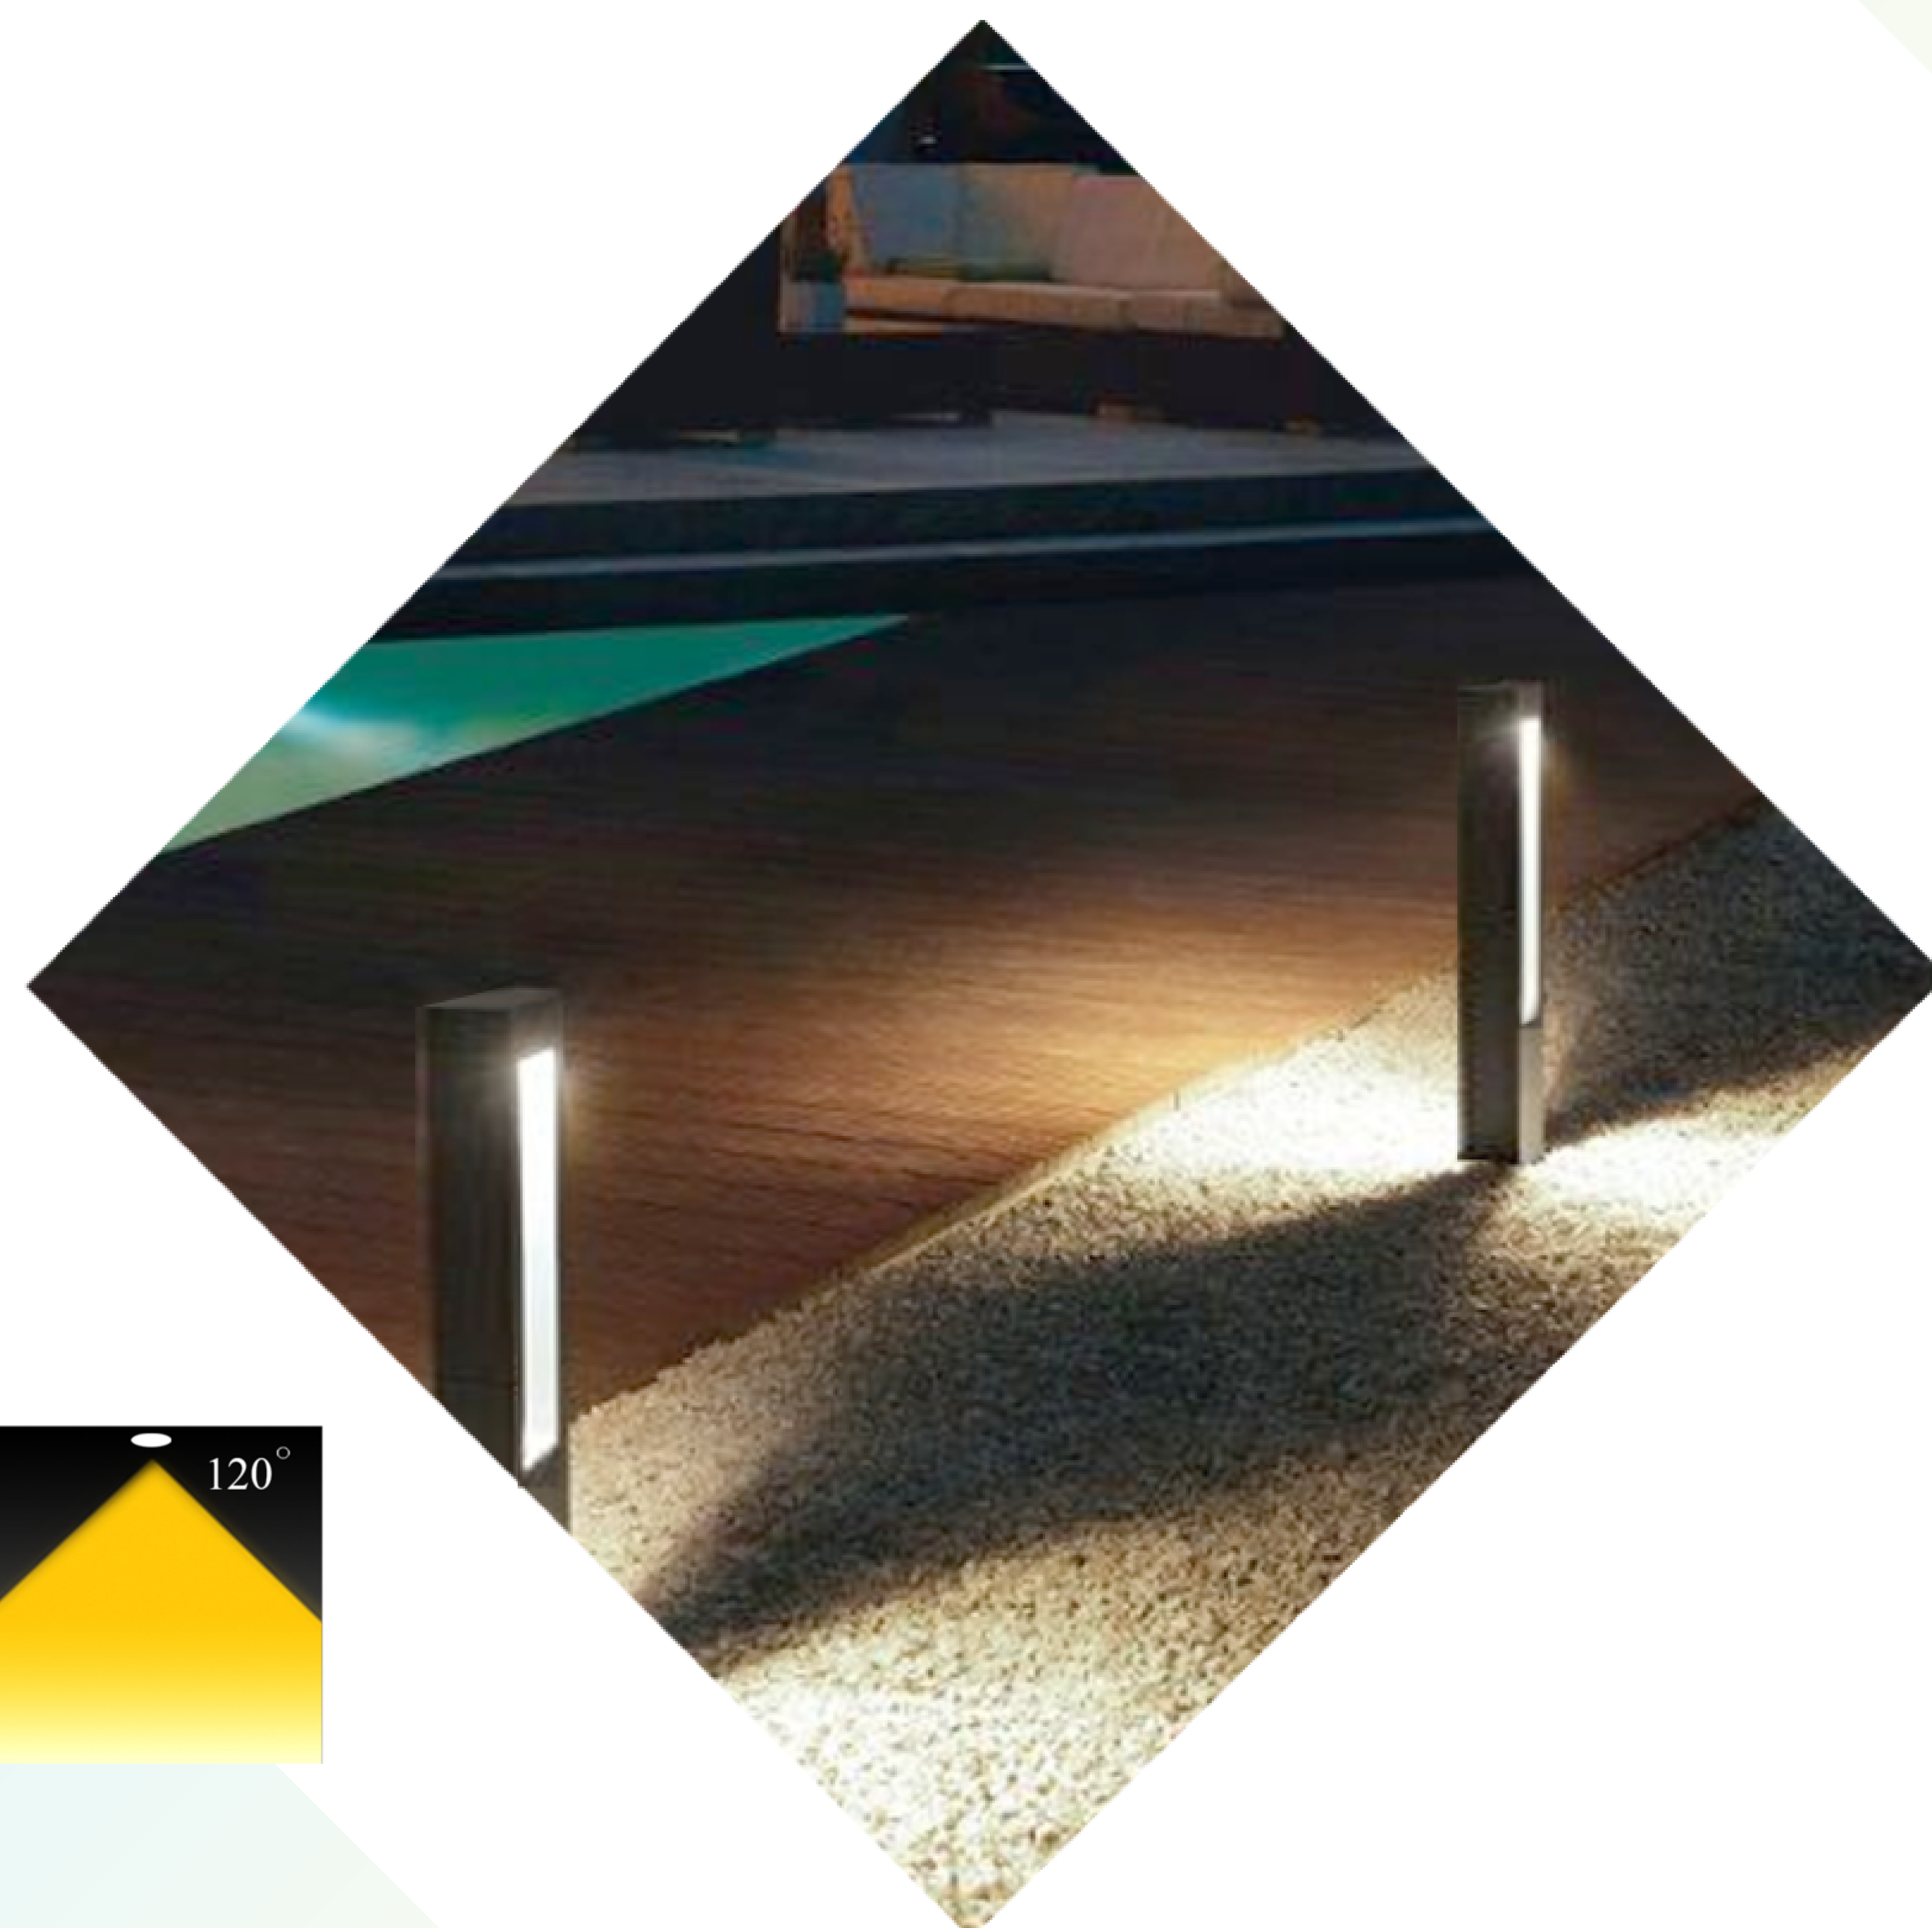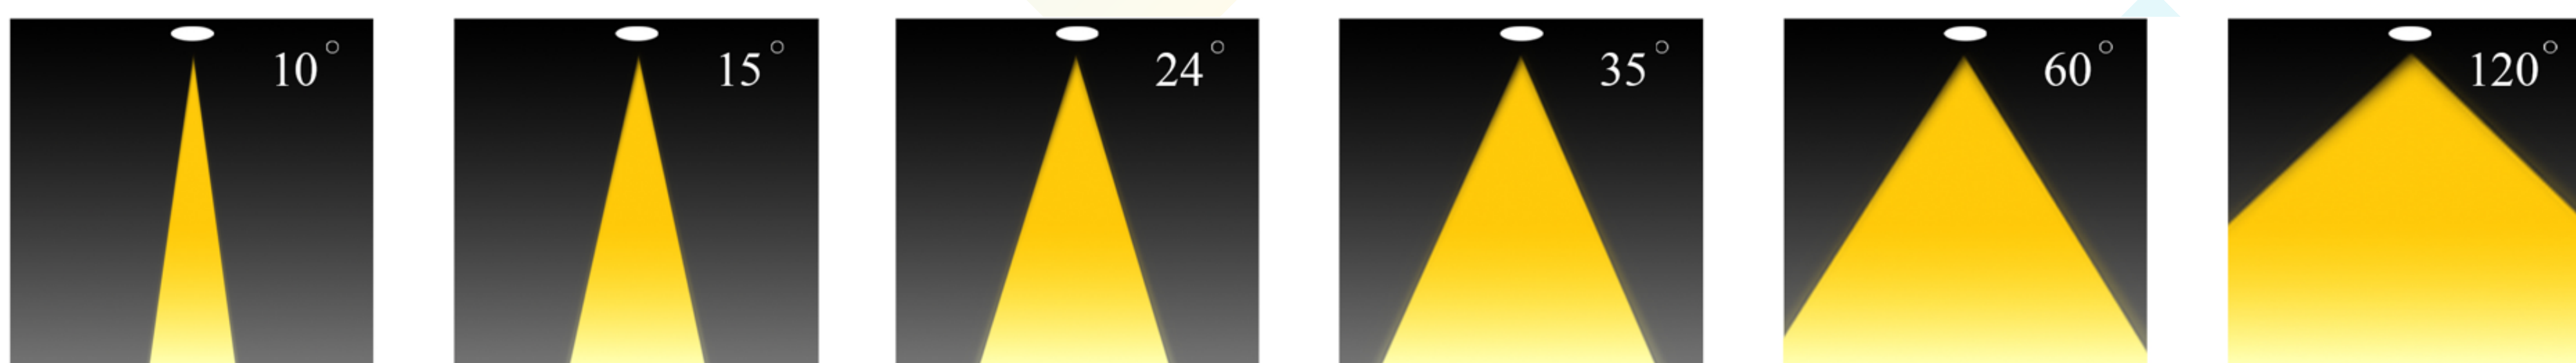

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions H - mm	Driver	LED Chip
BL142308120LMXXX	12 20	110	3000	650 1000	Meanwell	Lumiled

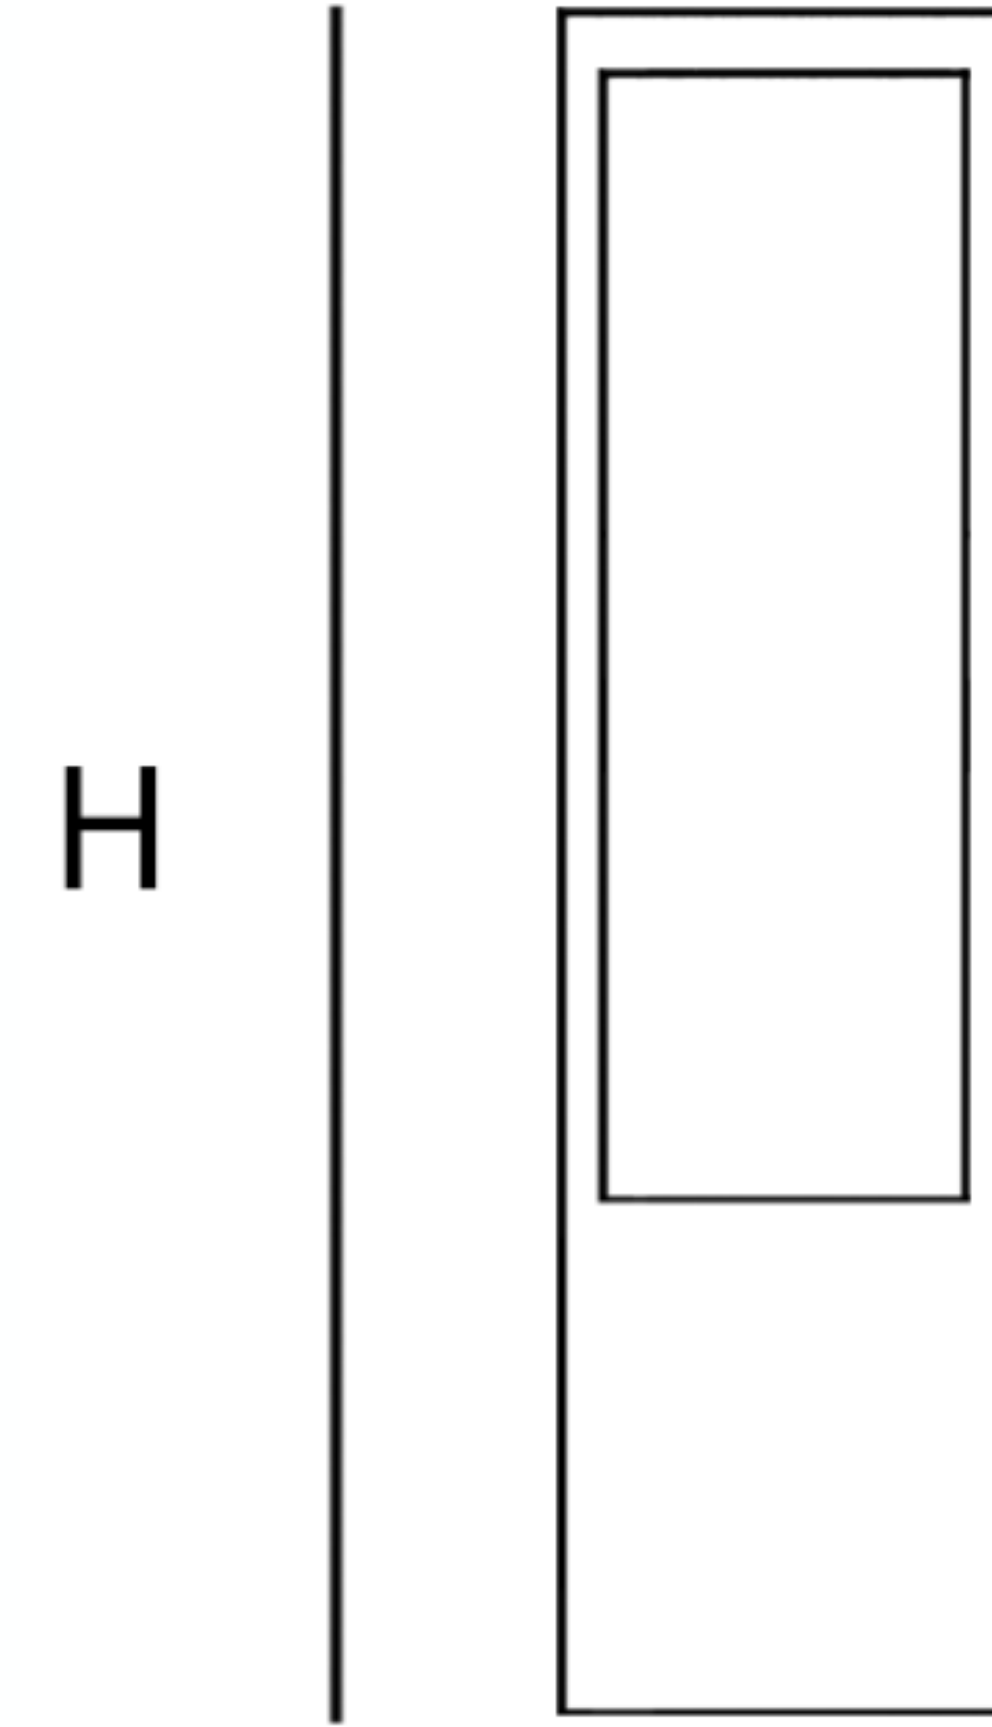

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

