

# Bollard

SLT-BL18



## PERFORMANCE DATA

**Efficacy :** 80 Lm/W

**Input Voltage :** 110 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 110°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-cast Aluminum

**Mounting :** In-Ground



**Lens :** Tempered Glass

**Finish :** Gray


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

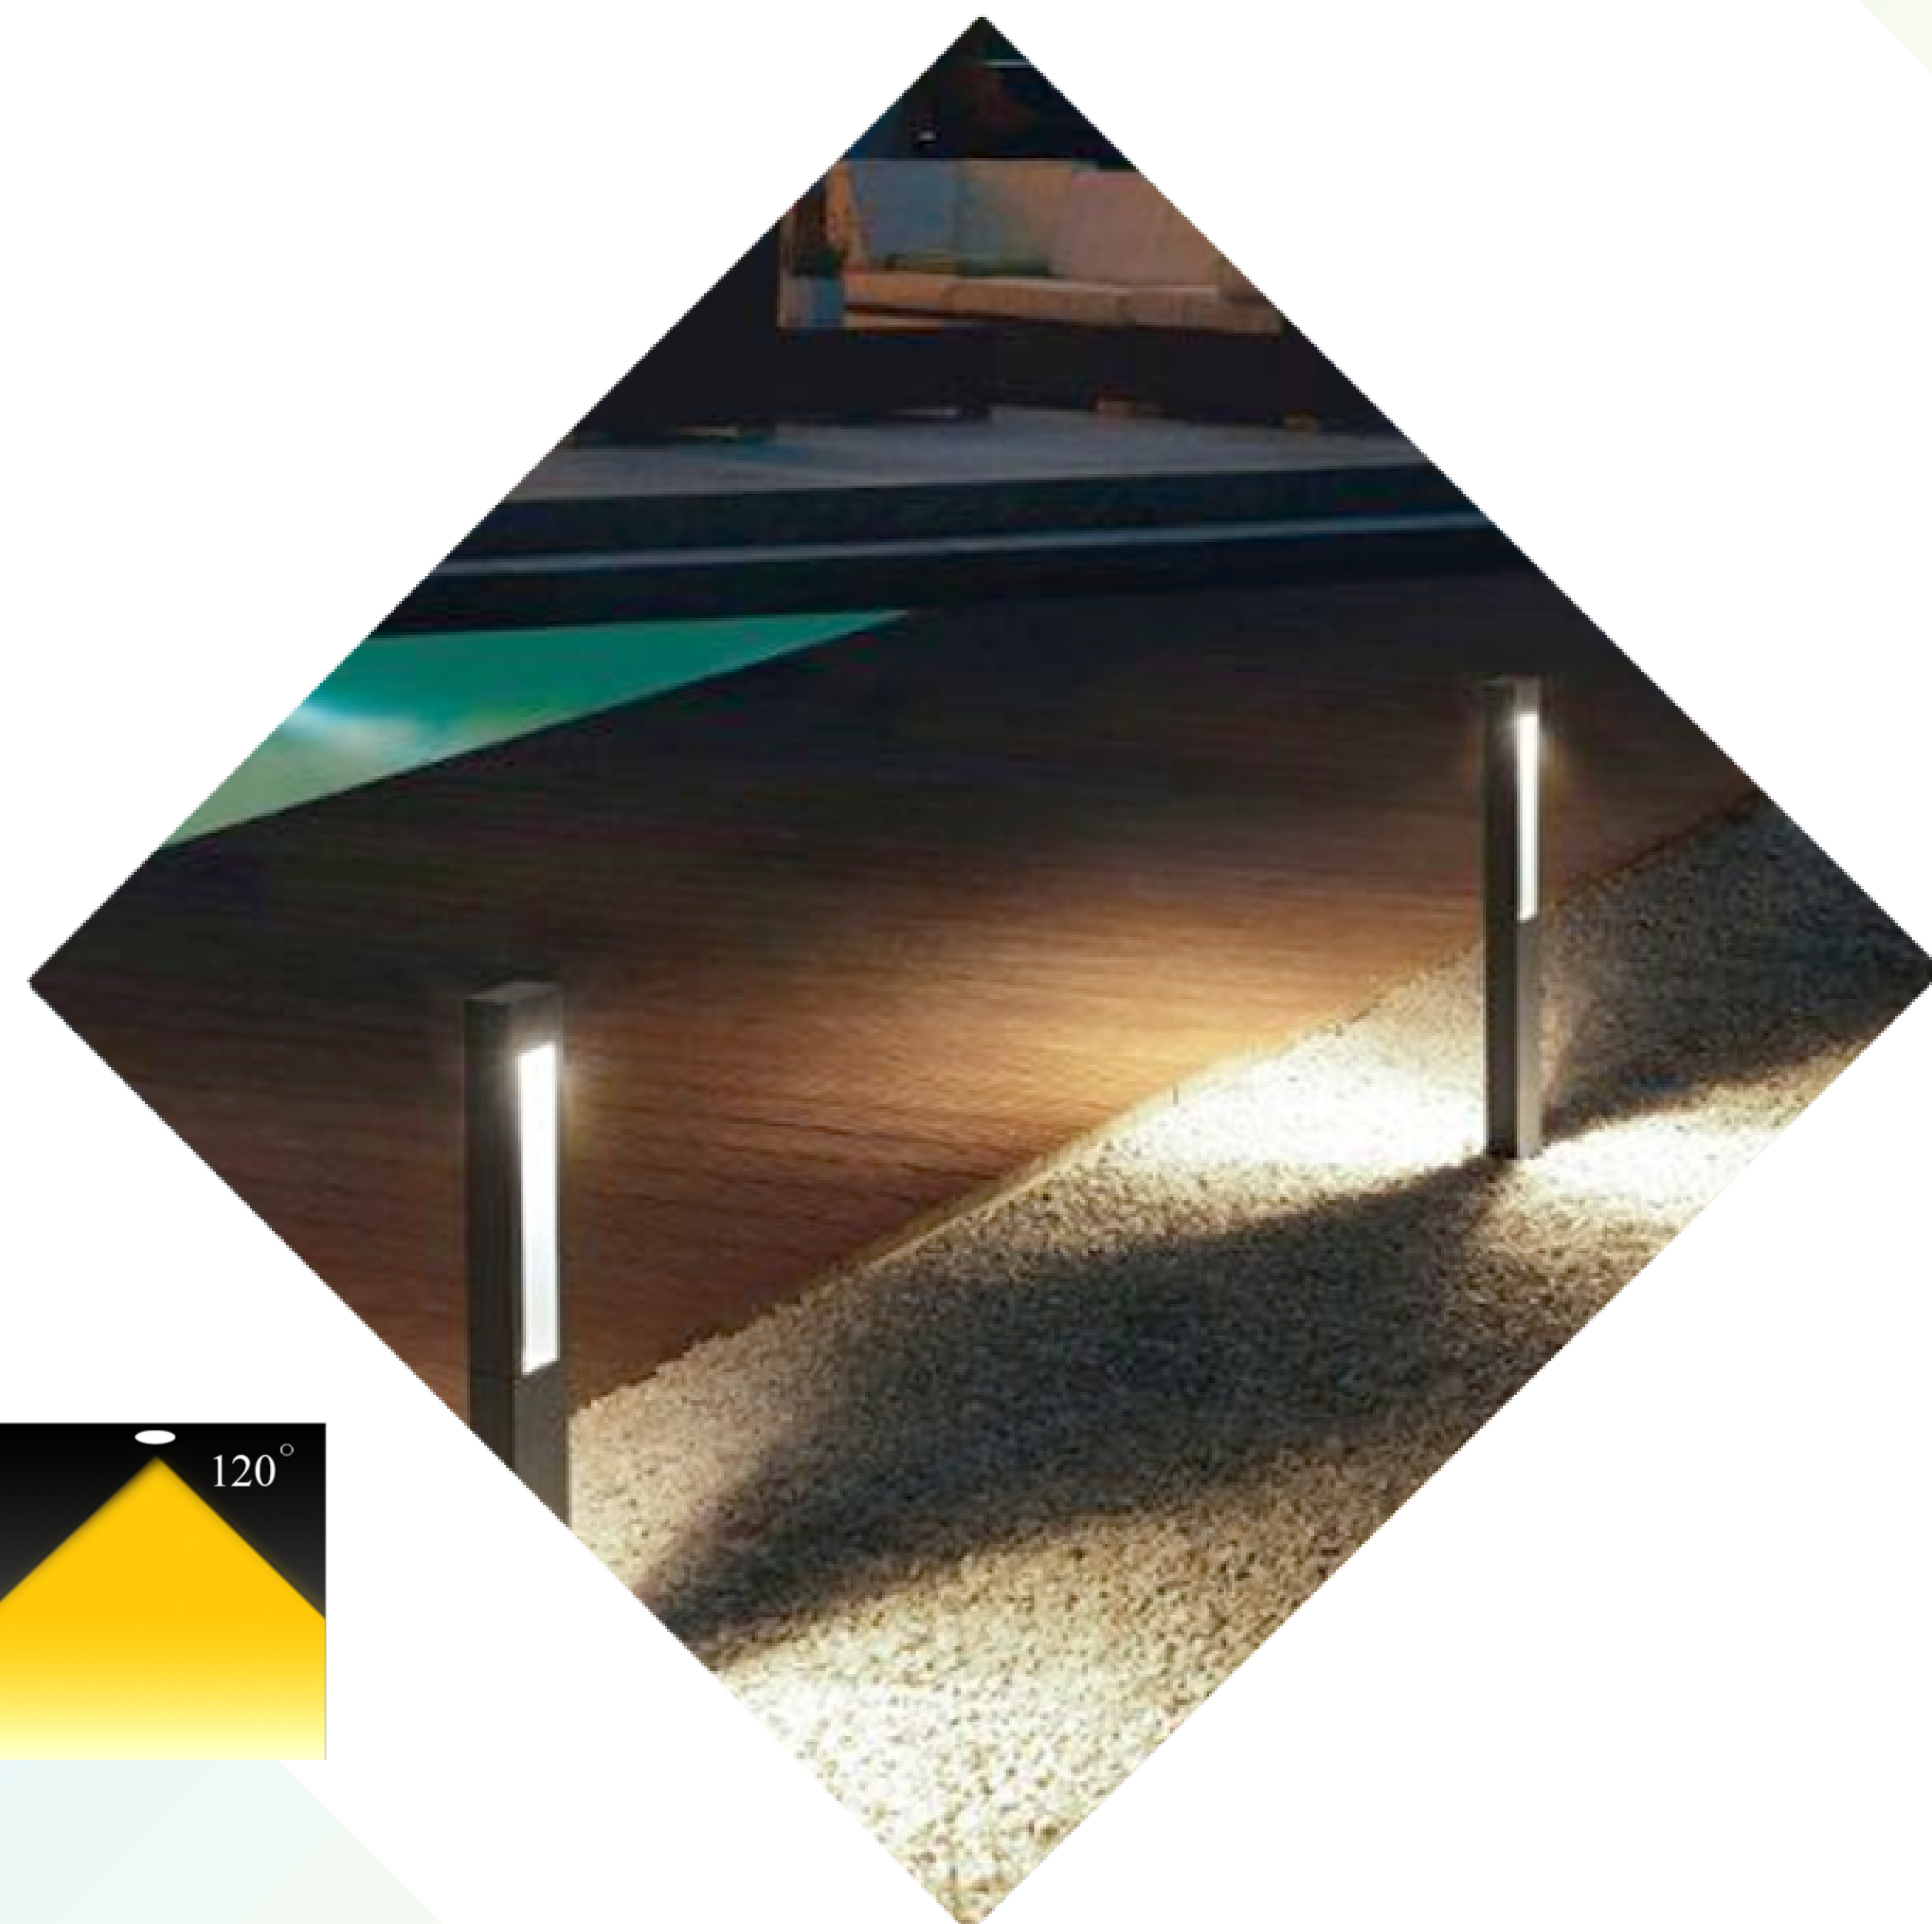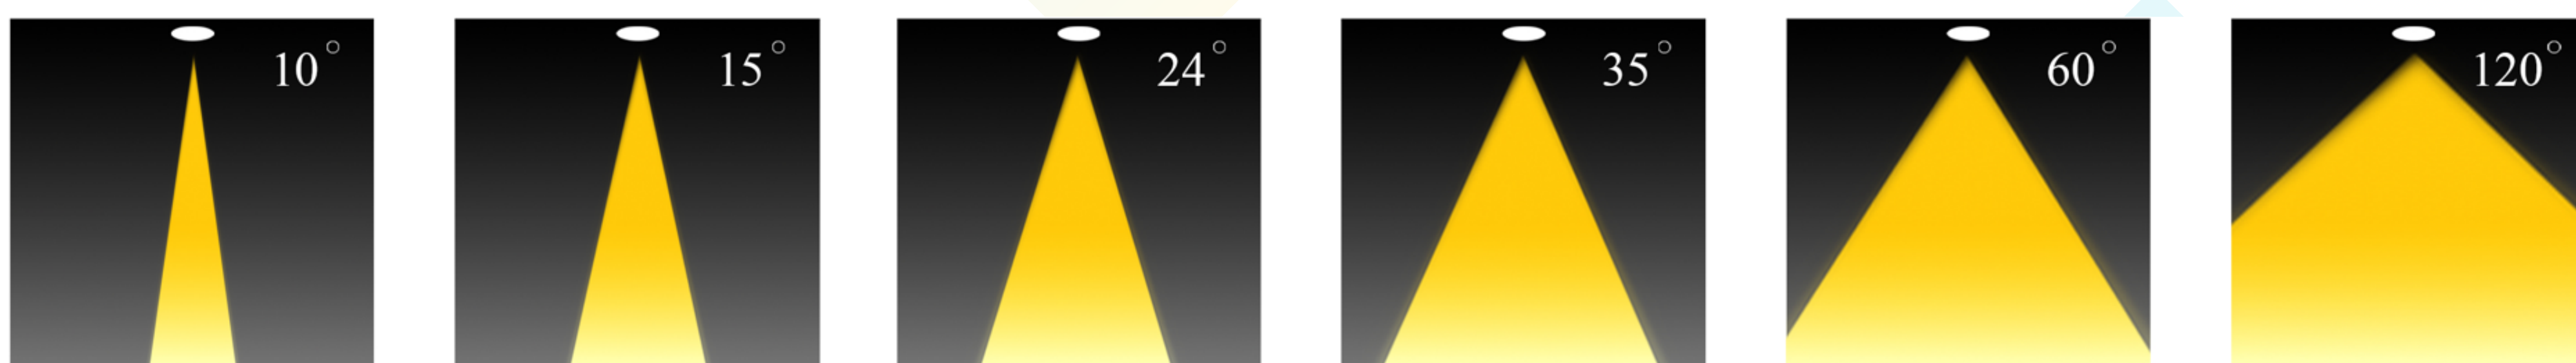

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions L×W×H - mm	Driver	LED Chip
BL183308XXXCX010650	10	80	3000	120×80×650 mm	Meanwell	Cree

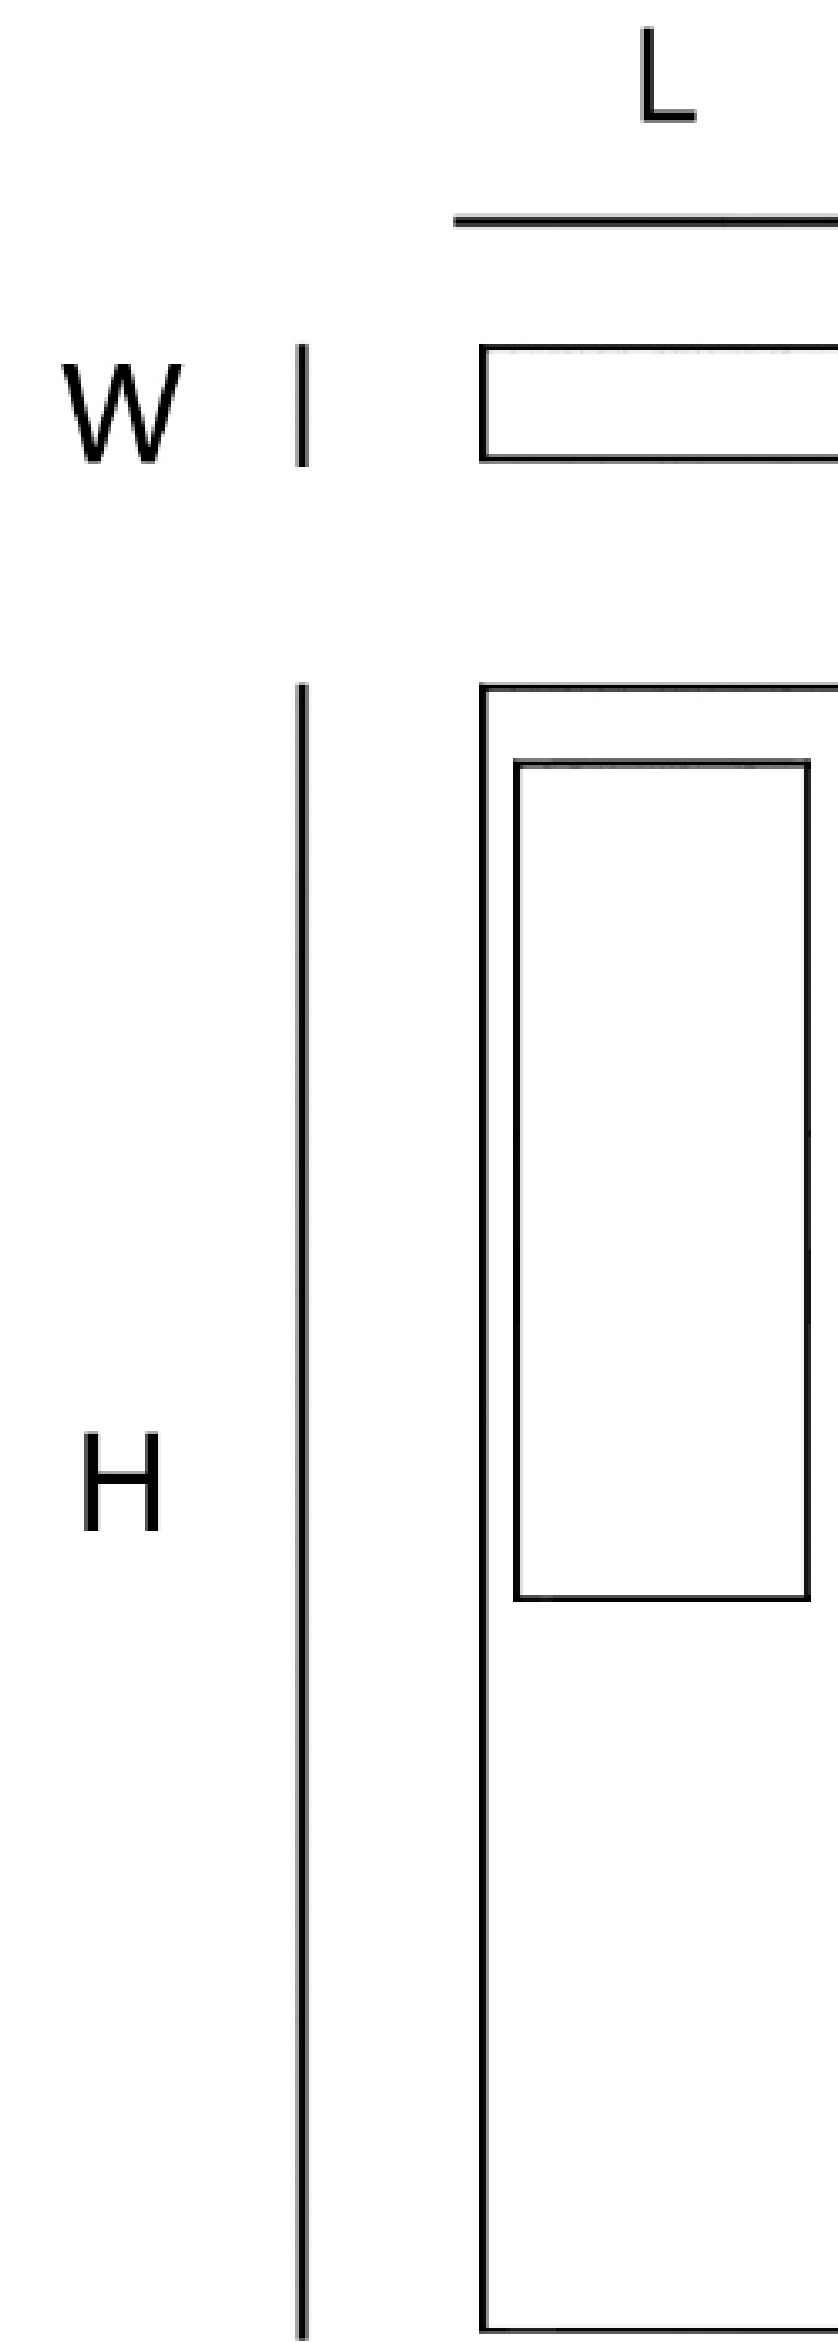

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

