

Pole Light

SLT-DP01



PERFORMANCE DATA

Efficacy : 110-120 Lm/W

Input Voltage : 220 V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 30.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum

Mounting : Pole Mounted

Lens : Glass


Finish : Gray

Protection Class : IP 65


Mechanical Resistance : IK 06



OPTICS

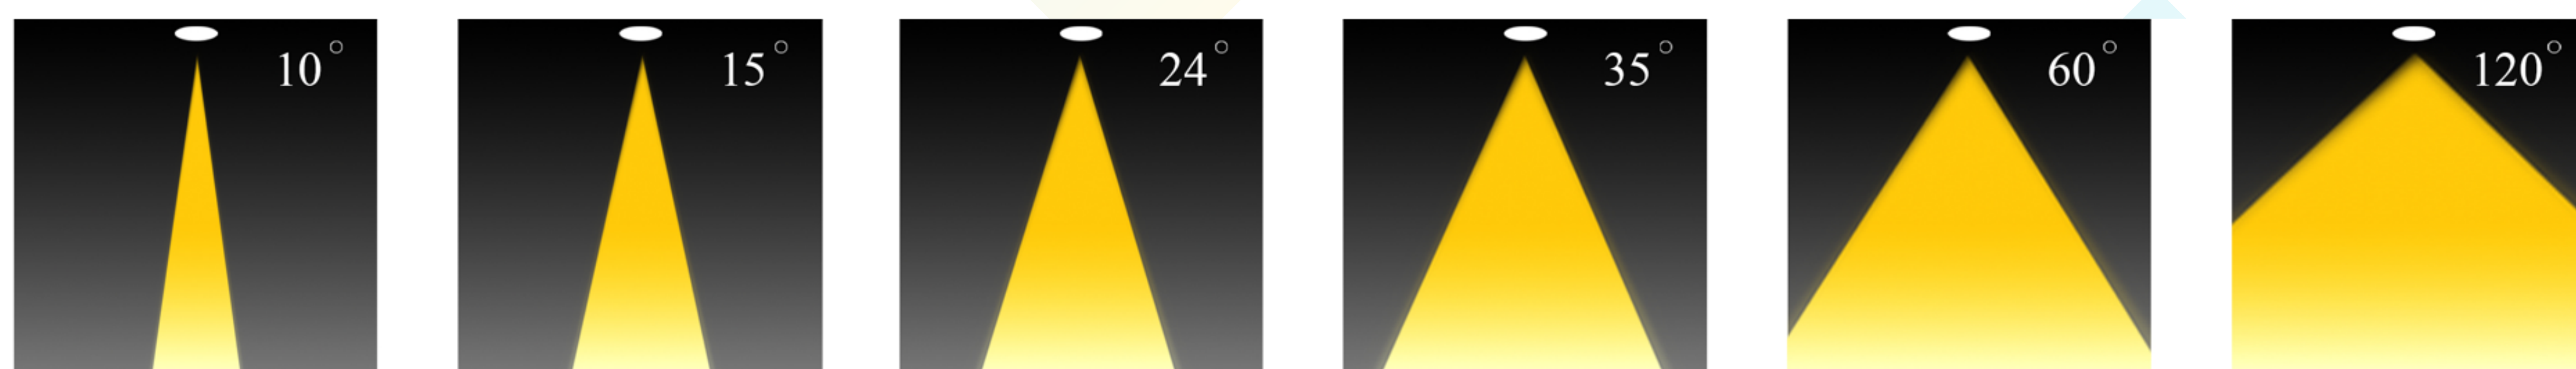

| Code | Power W | Efficacy Lm/W | Colour Temp. K | Dimensions H mm | Driver | LED Chip |
|-----------------|------------|------------------|-------------------|--------------------|------------|----------|
| DP13308120PE040 | 40 | 110-120 | 3000 | 3000 | Eagle rise | Philips |

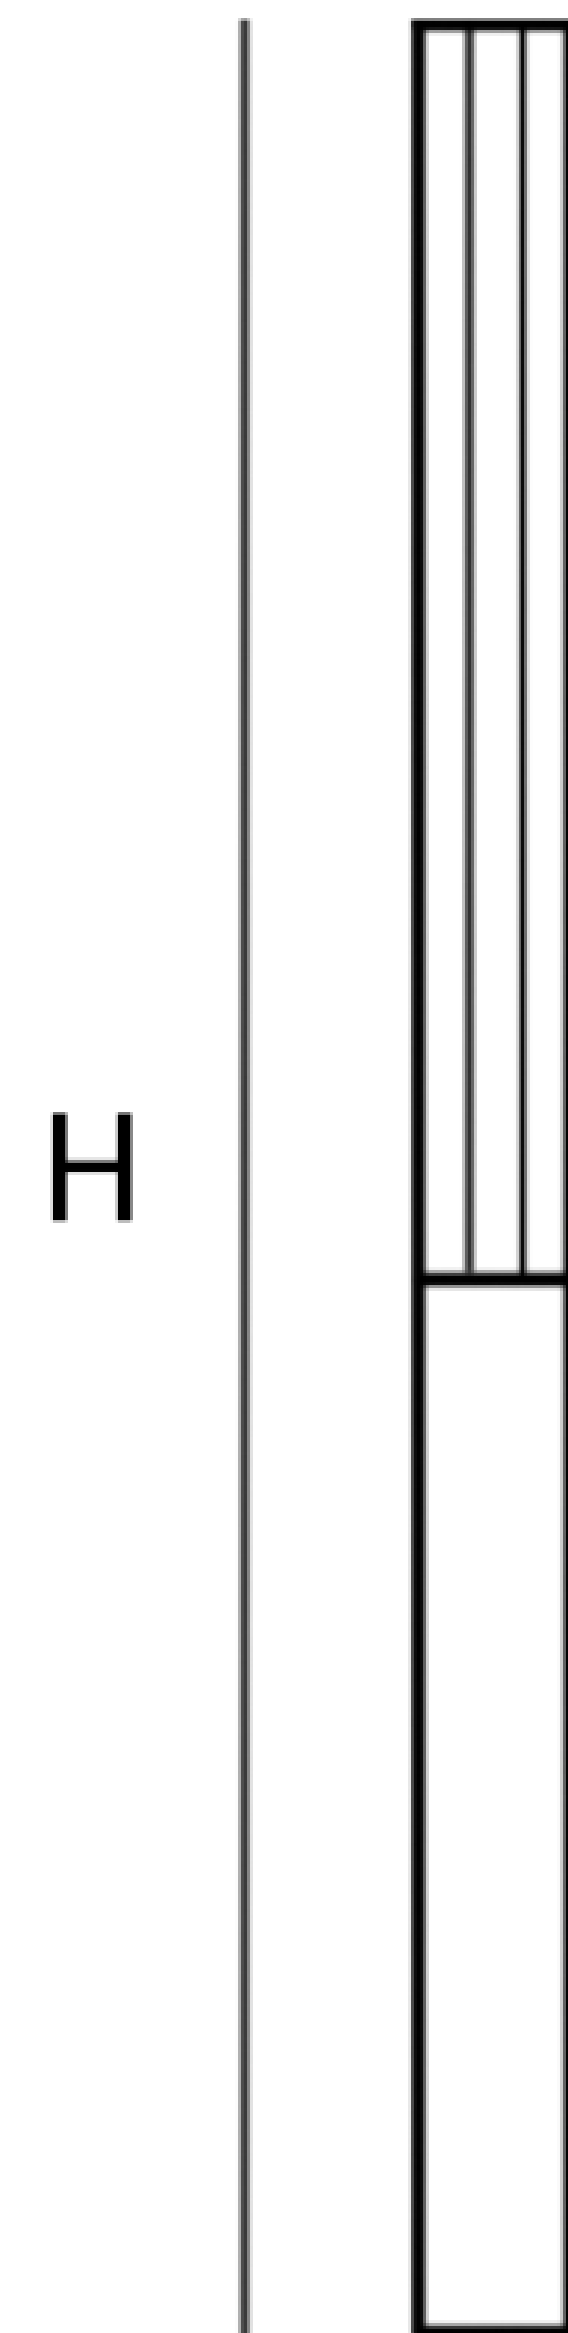

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

