

Magnetic track

SLT-MT04



PERFORMANCE DATA

Efficacy : 85 Lm/W

Input Voltage : 48V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 30,000 hrs

Optic : 24°

Class : III

MECHANICAL SPECIFICATIONS

Material : die casting Aluminum

Mounting : Magnetic track light


Lens : Glass

Finish : Black


Protection Class : IP 20

Mechanical resistance : IK 03

OPTICS

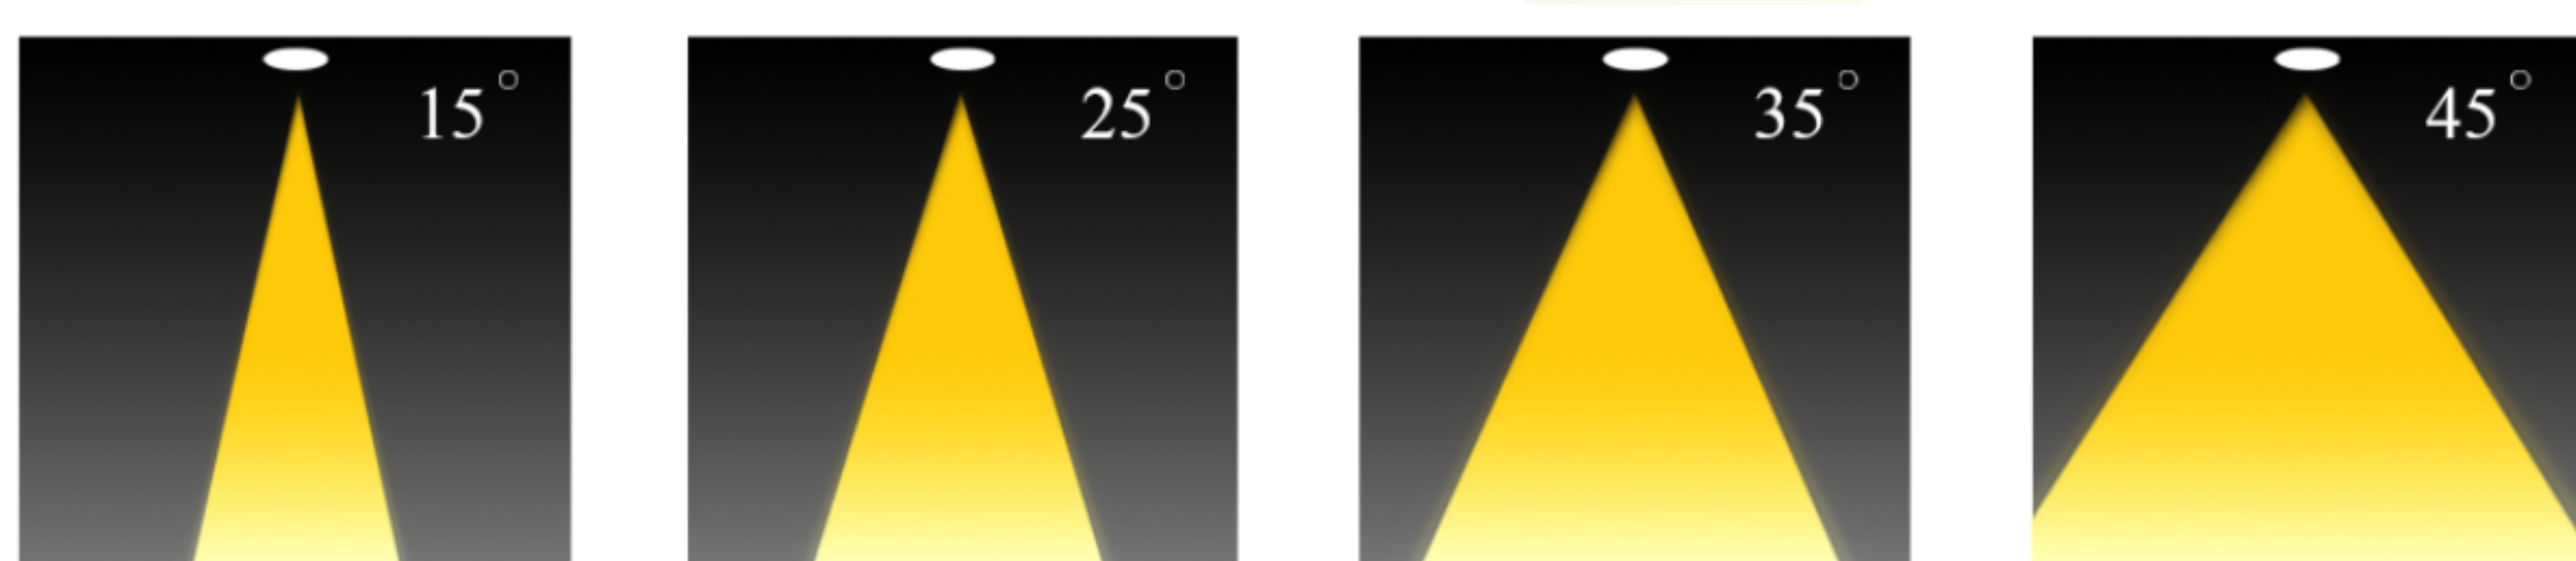

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions LxWxH mm	Driver	LED Chip	Weight Kg
MT042XX9XXXOX012	12	85	3000 4000	235x22x100 mm	Tridonic Ltech	Osram Bridgelux	0.200

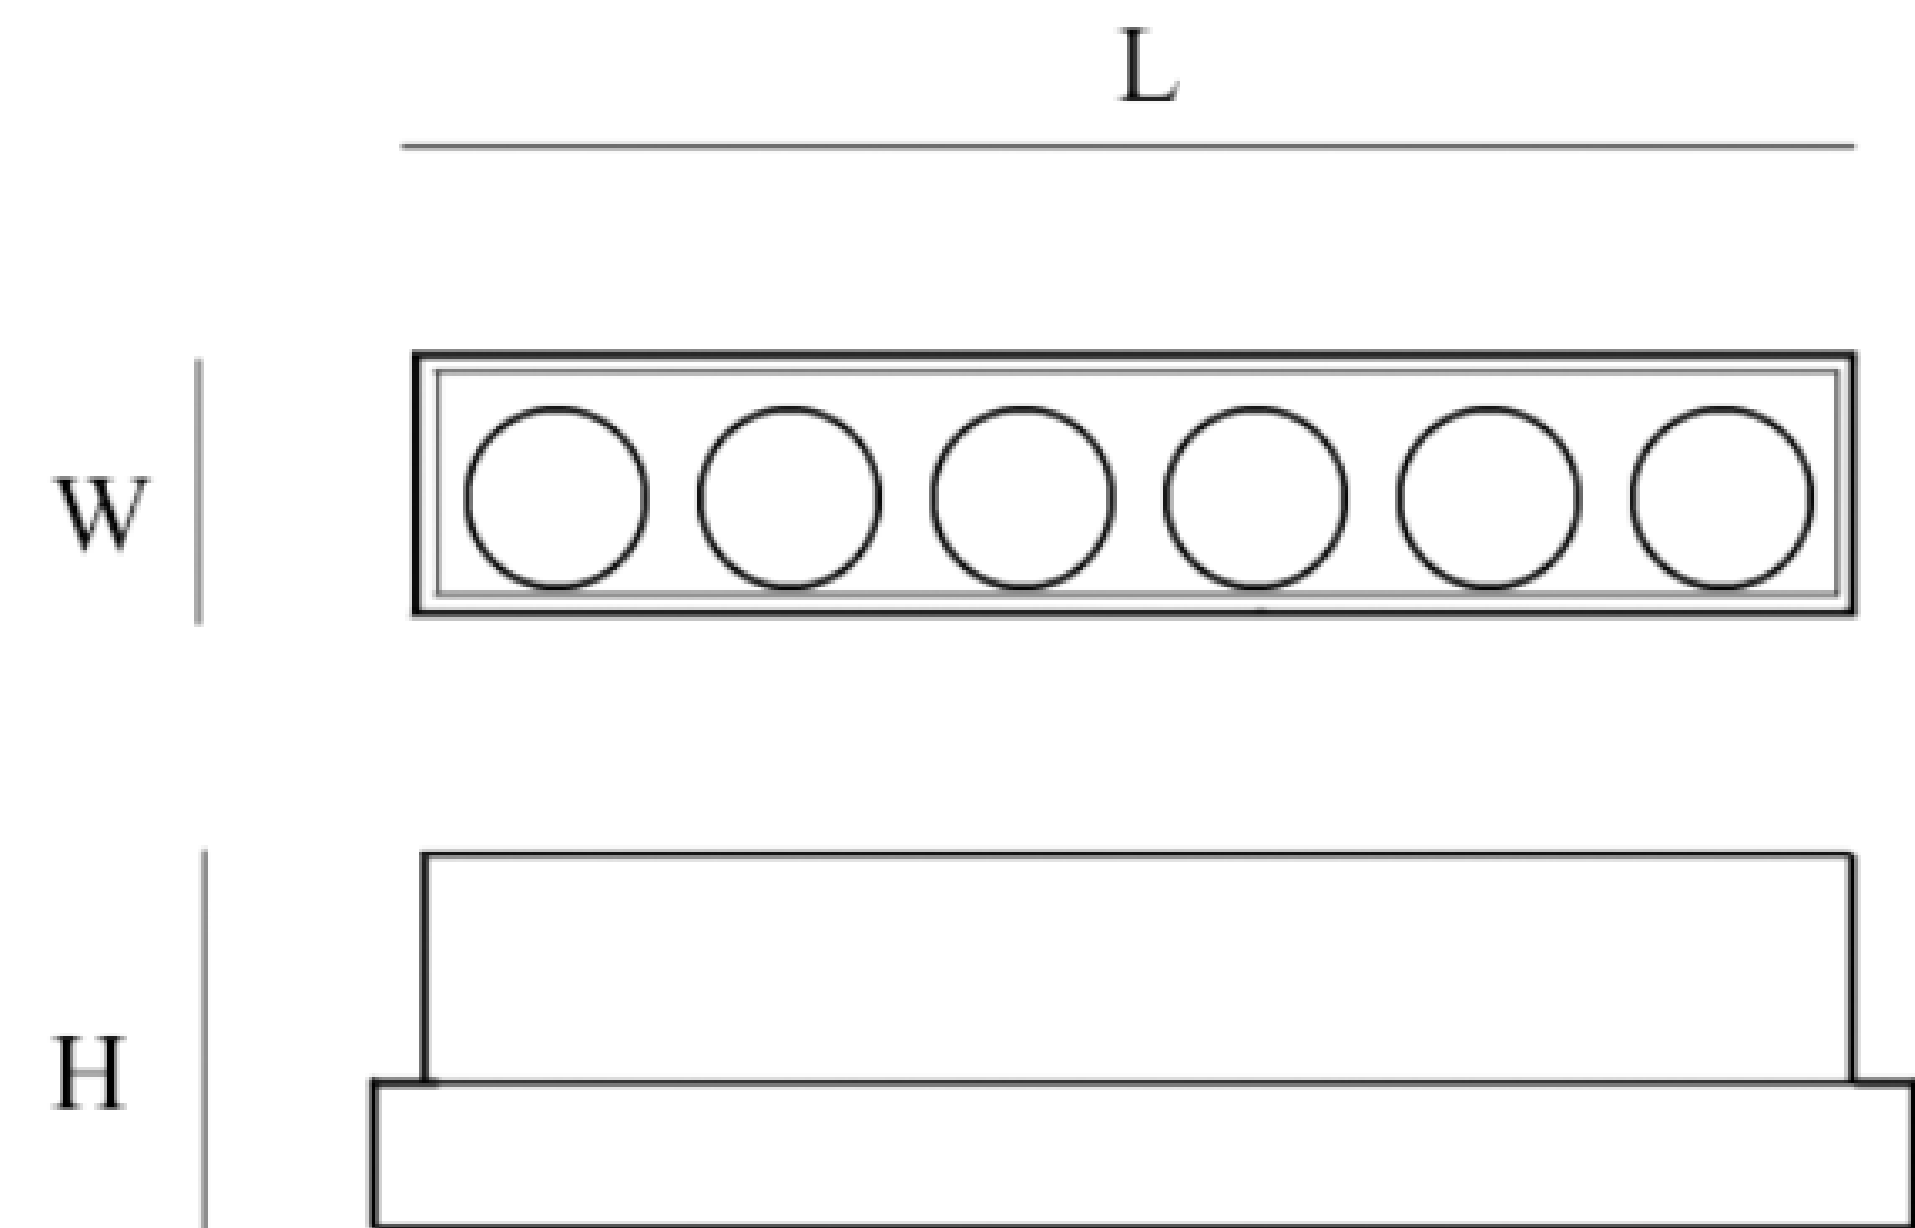

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

