

Projector

SLT-P102



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 28°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : Surface Mounted


Lens : Clear Tampered Glass

Finish : Gray RAL 7016


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

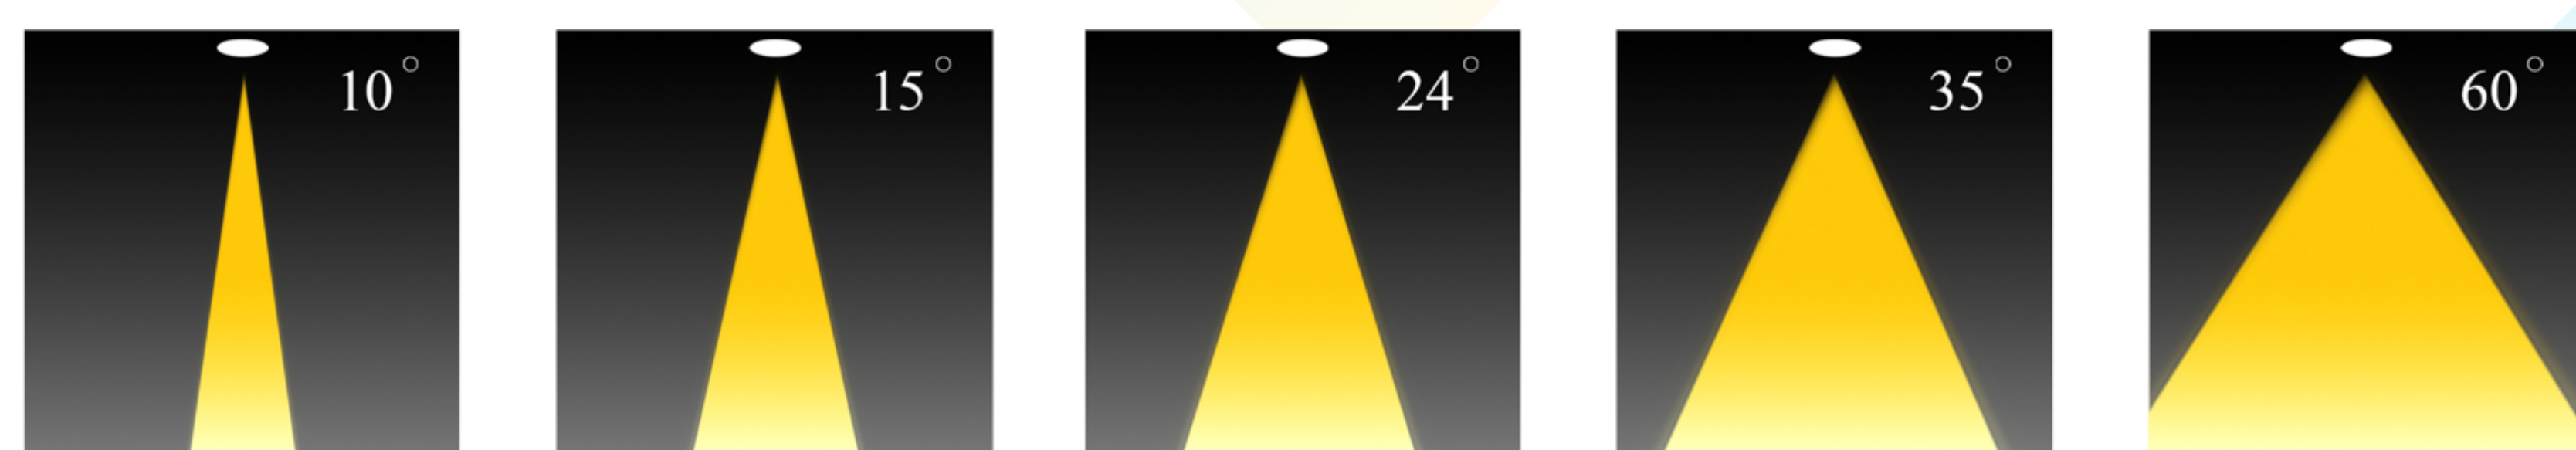

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅xLxH mm	Driver	LED Chip	Weight Kg
P1022308XXXCTXXX	10 14 20 24	90	3000	155x190x240 mm	Tridonic	Cree	

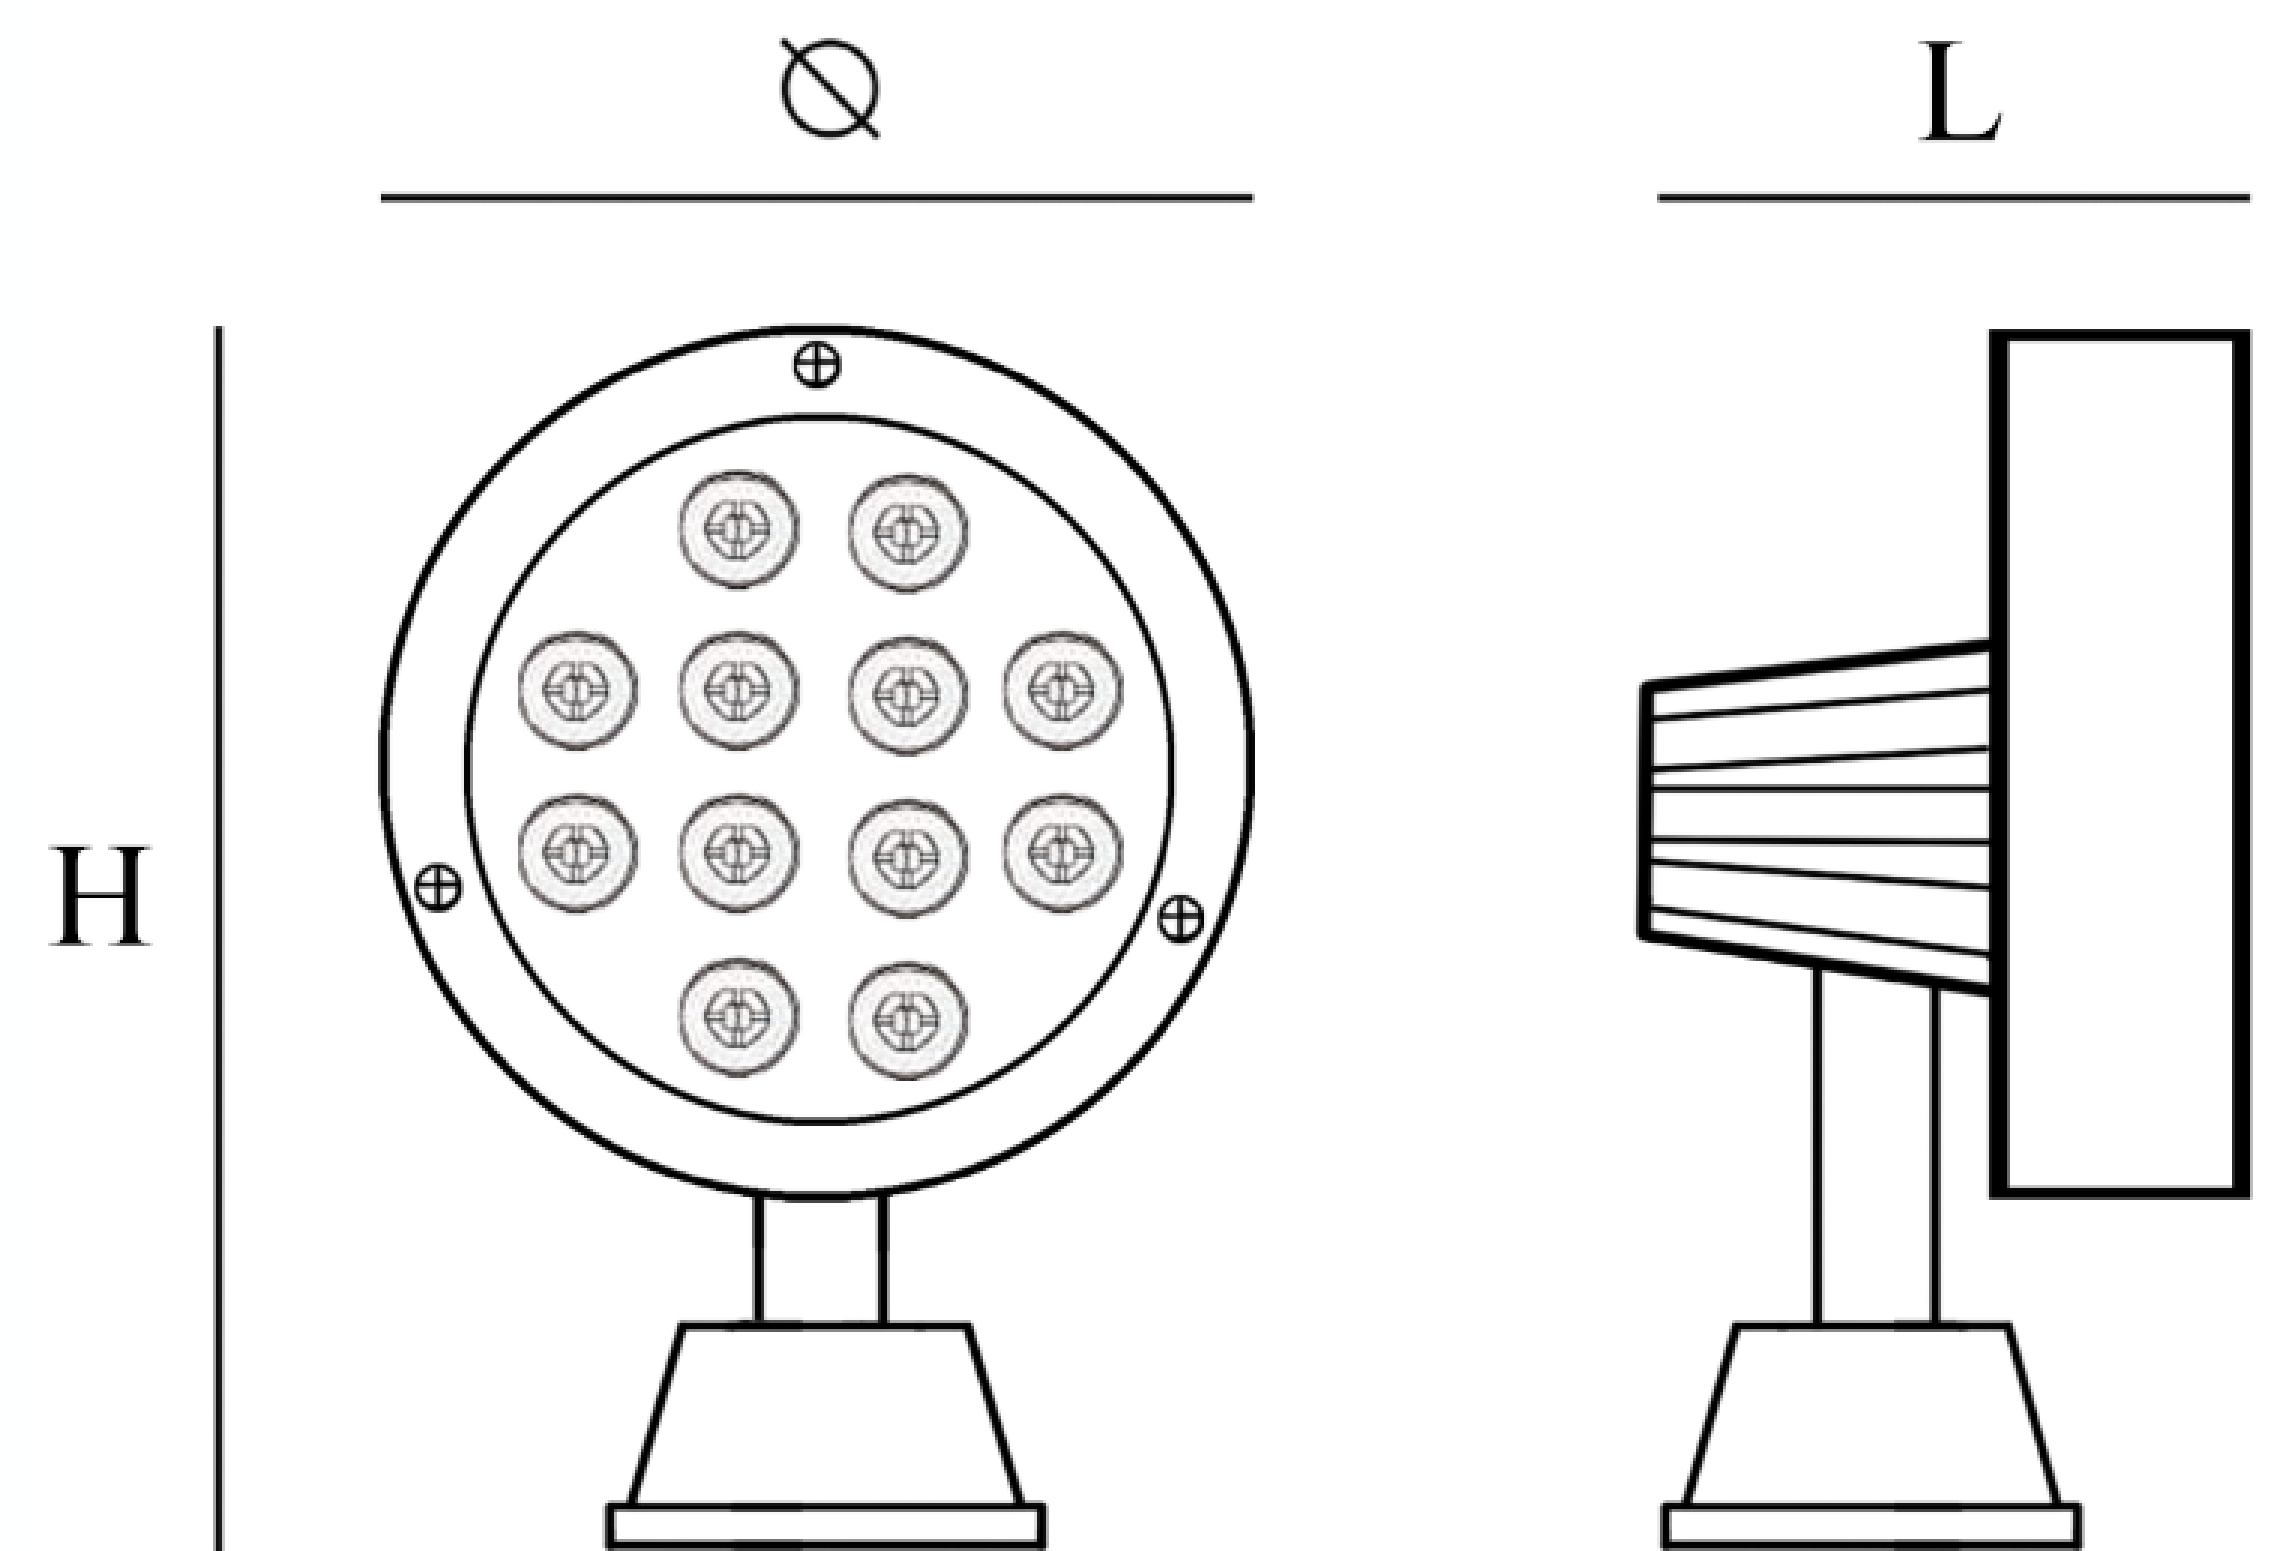

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

