

# linear Aluminum profile

SLT-RL1120



## PERFORMANCE DATA

**Efficacy :** 130 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 120°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Extruded Aluminum

**Mounting :** Recessed


**Lens :** Polycarbonate

**Finish :** Black


**Protection Class :** IP 40-54

**Mechanical Resistance :** IK 03

## OPTICS

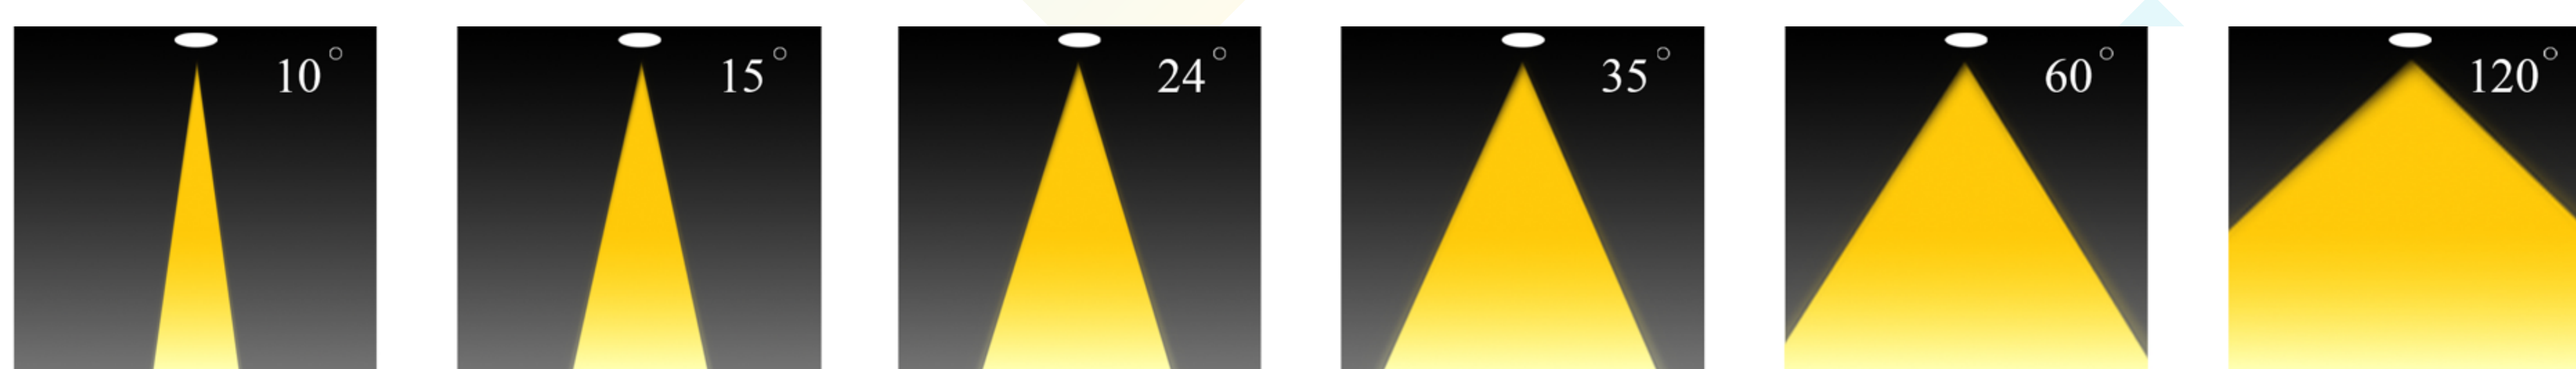

Code	Power W	Efficacy Lm/W	Colour Temp. M	Dimensions AxBxC mm	Driver	LED Chip	Weight
RL167XXX8120OT036	36	130	3000 4000 6500	1200x50x70 mm	Tridonic Done	Osram	

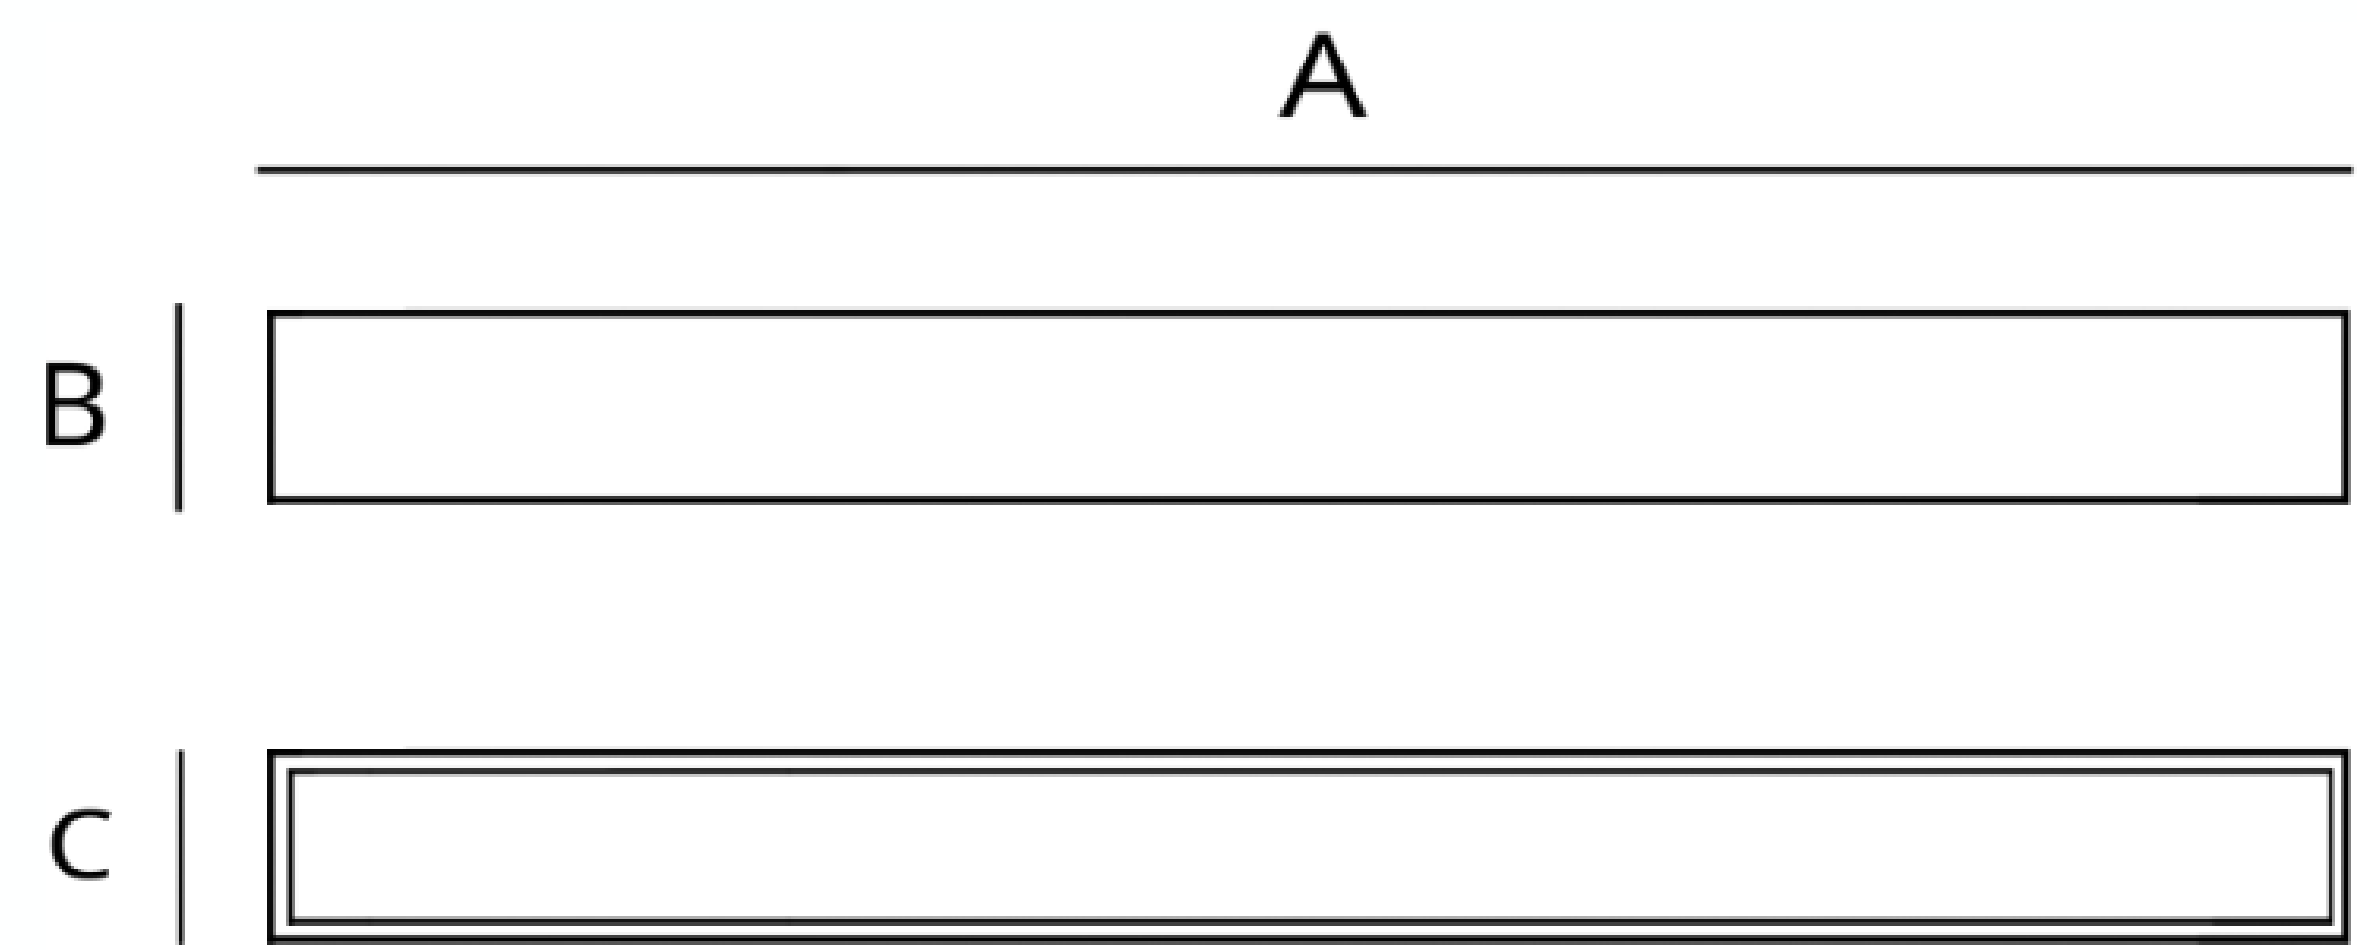

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

White  
Gray

DALI

## POLAR CURVE

