

Spike

SLT-S102



PERFORMANCE DATA

Efficacy : 87.6 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 24°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : In Ground



Lens : Clear Tampered Glass

Finish : Gray RAL 7016


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

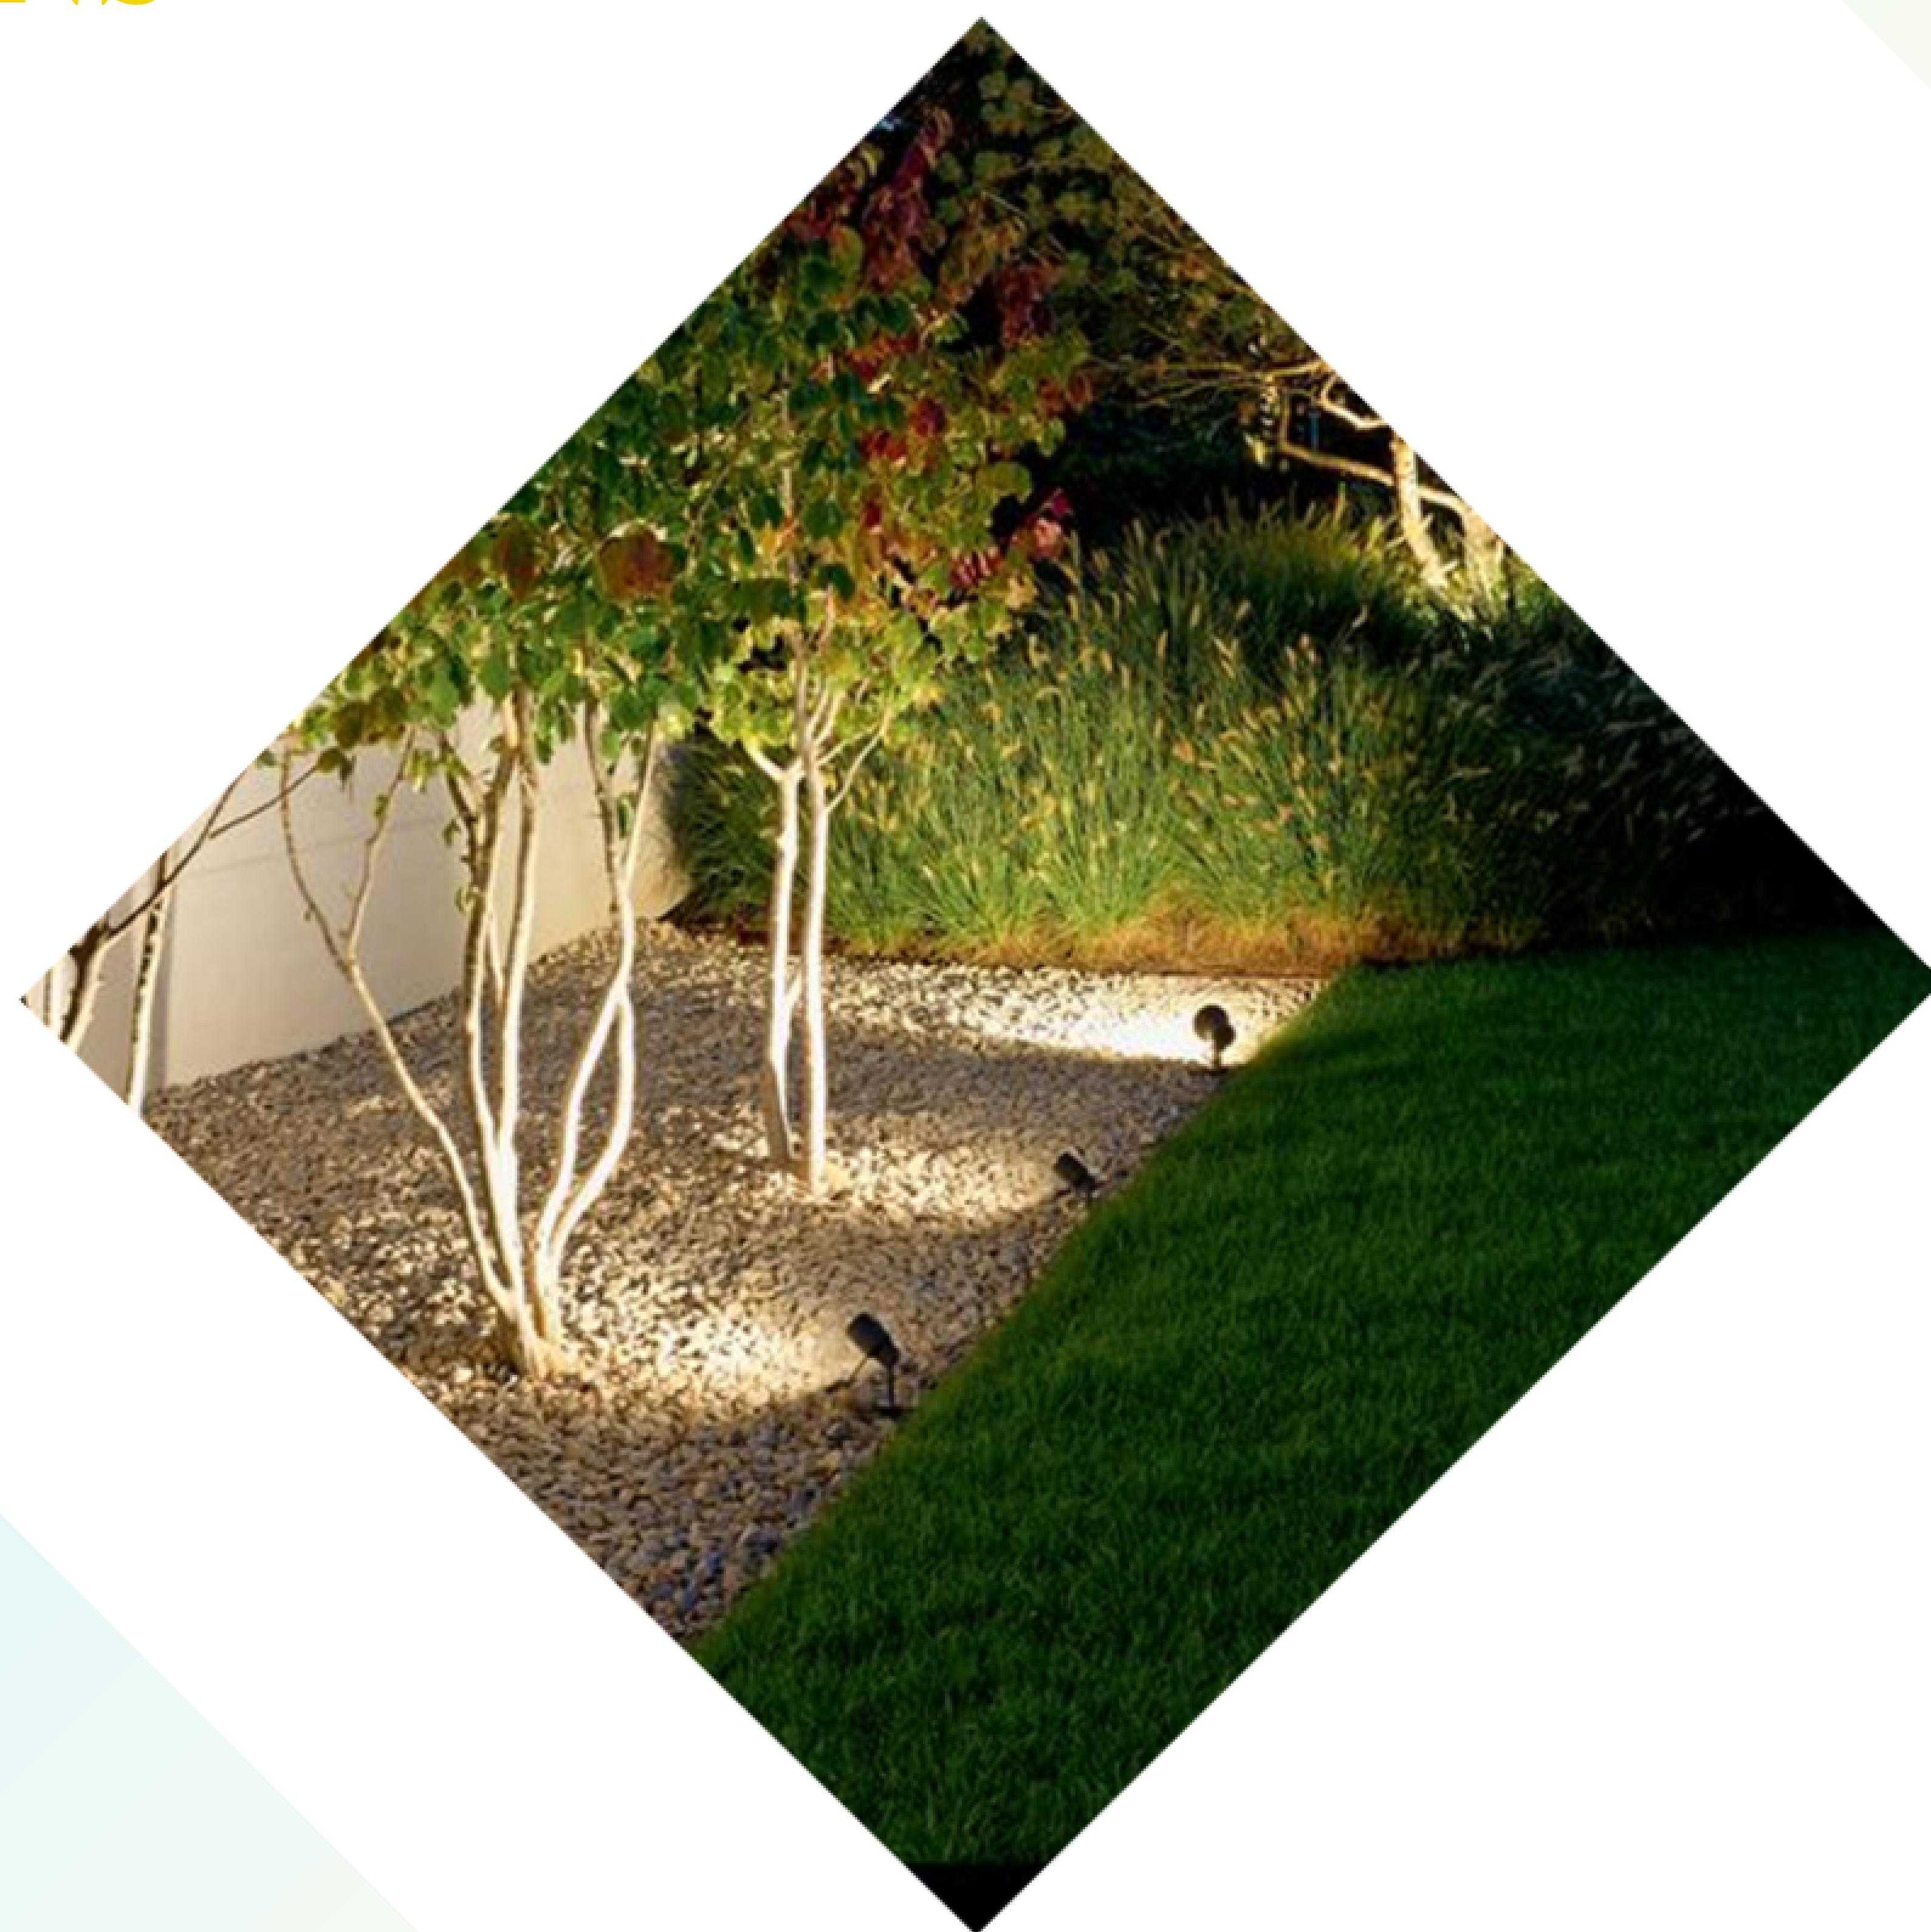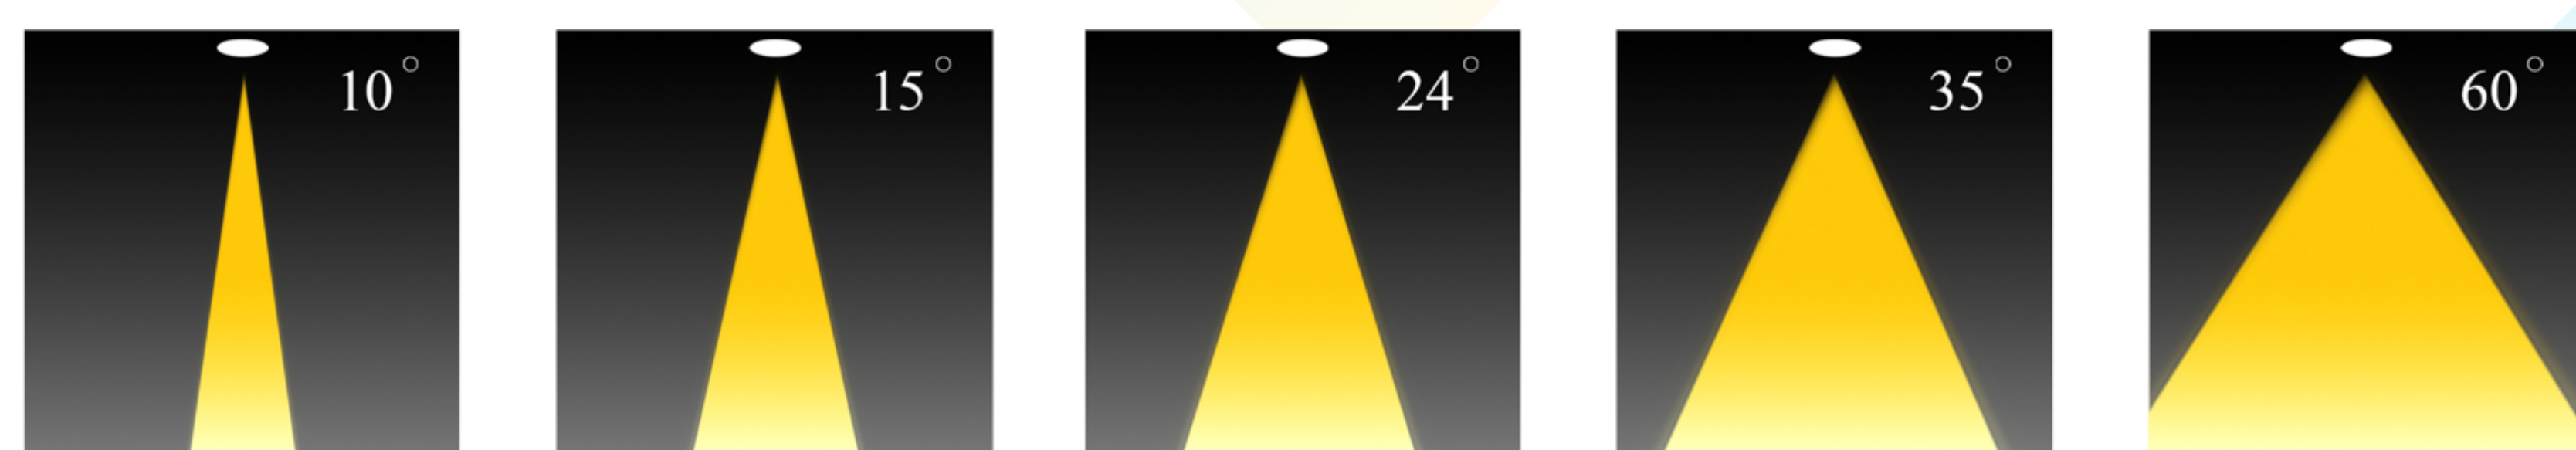

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
S102330X0XXCD006	6	87.6	3000	64x350 mm	Done	Cree	0.595

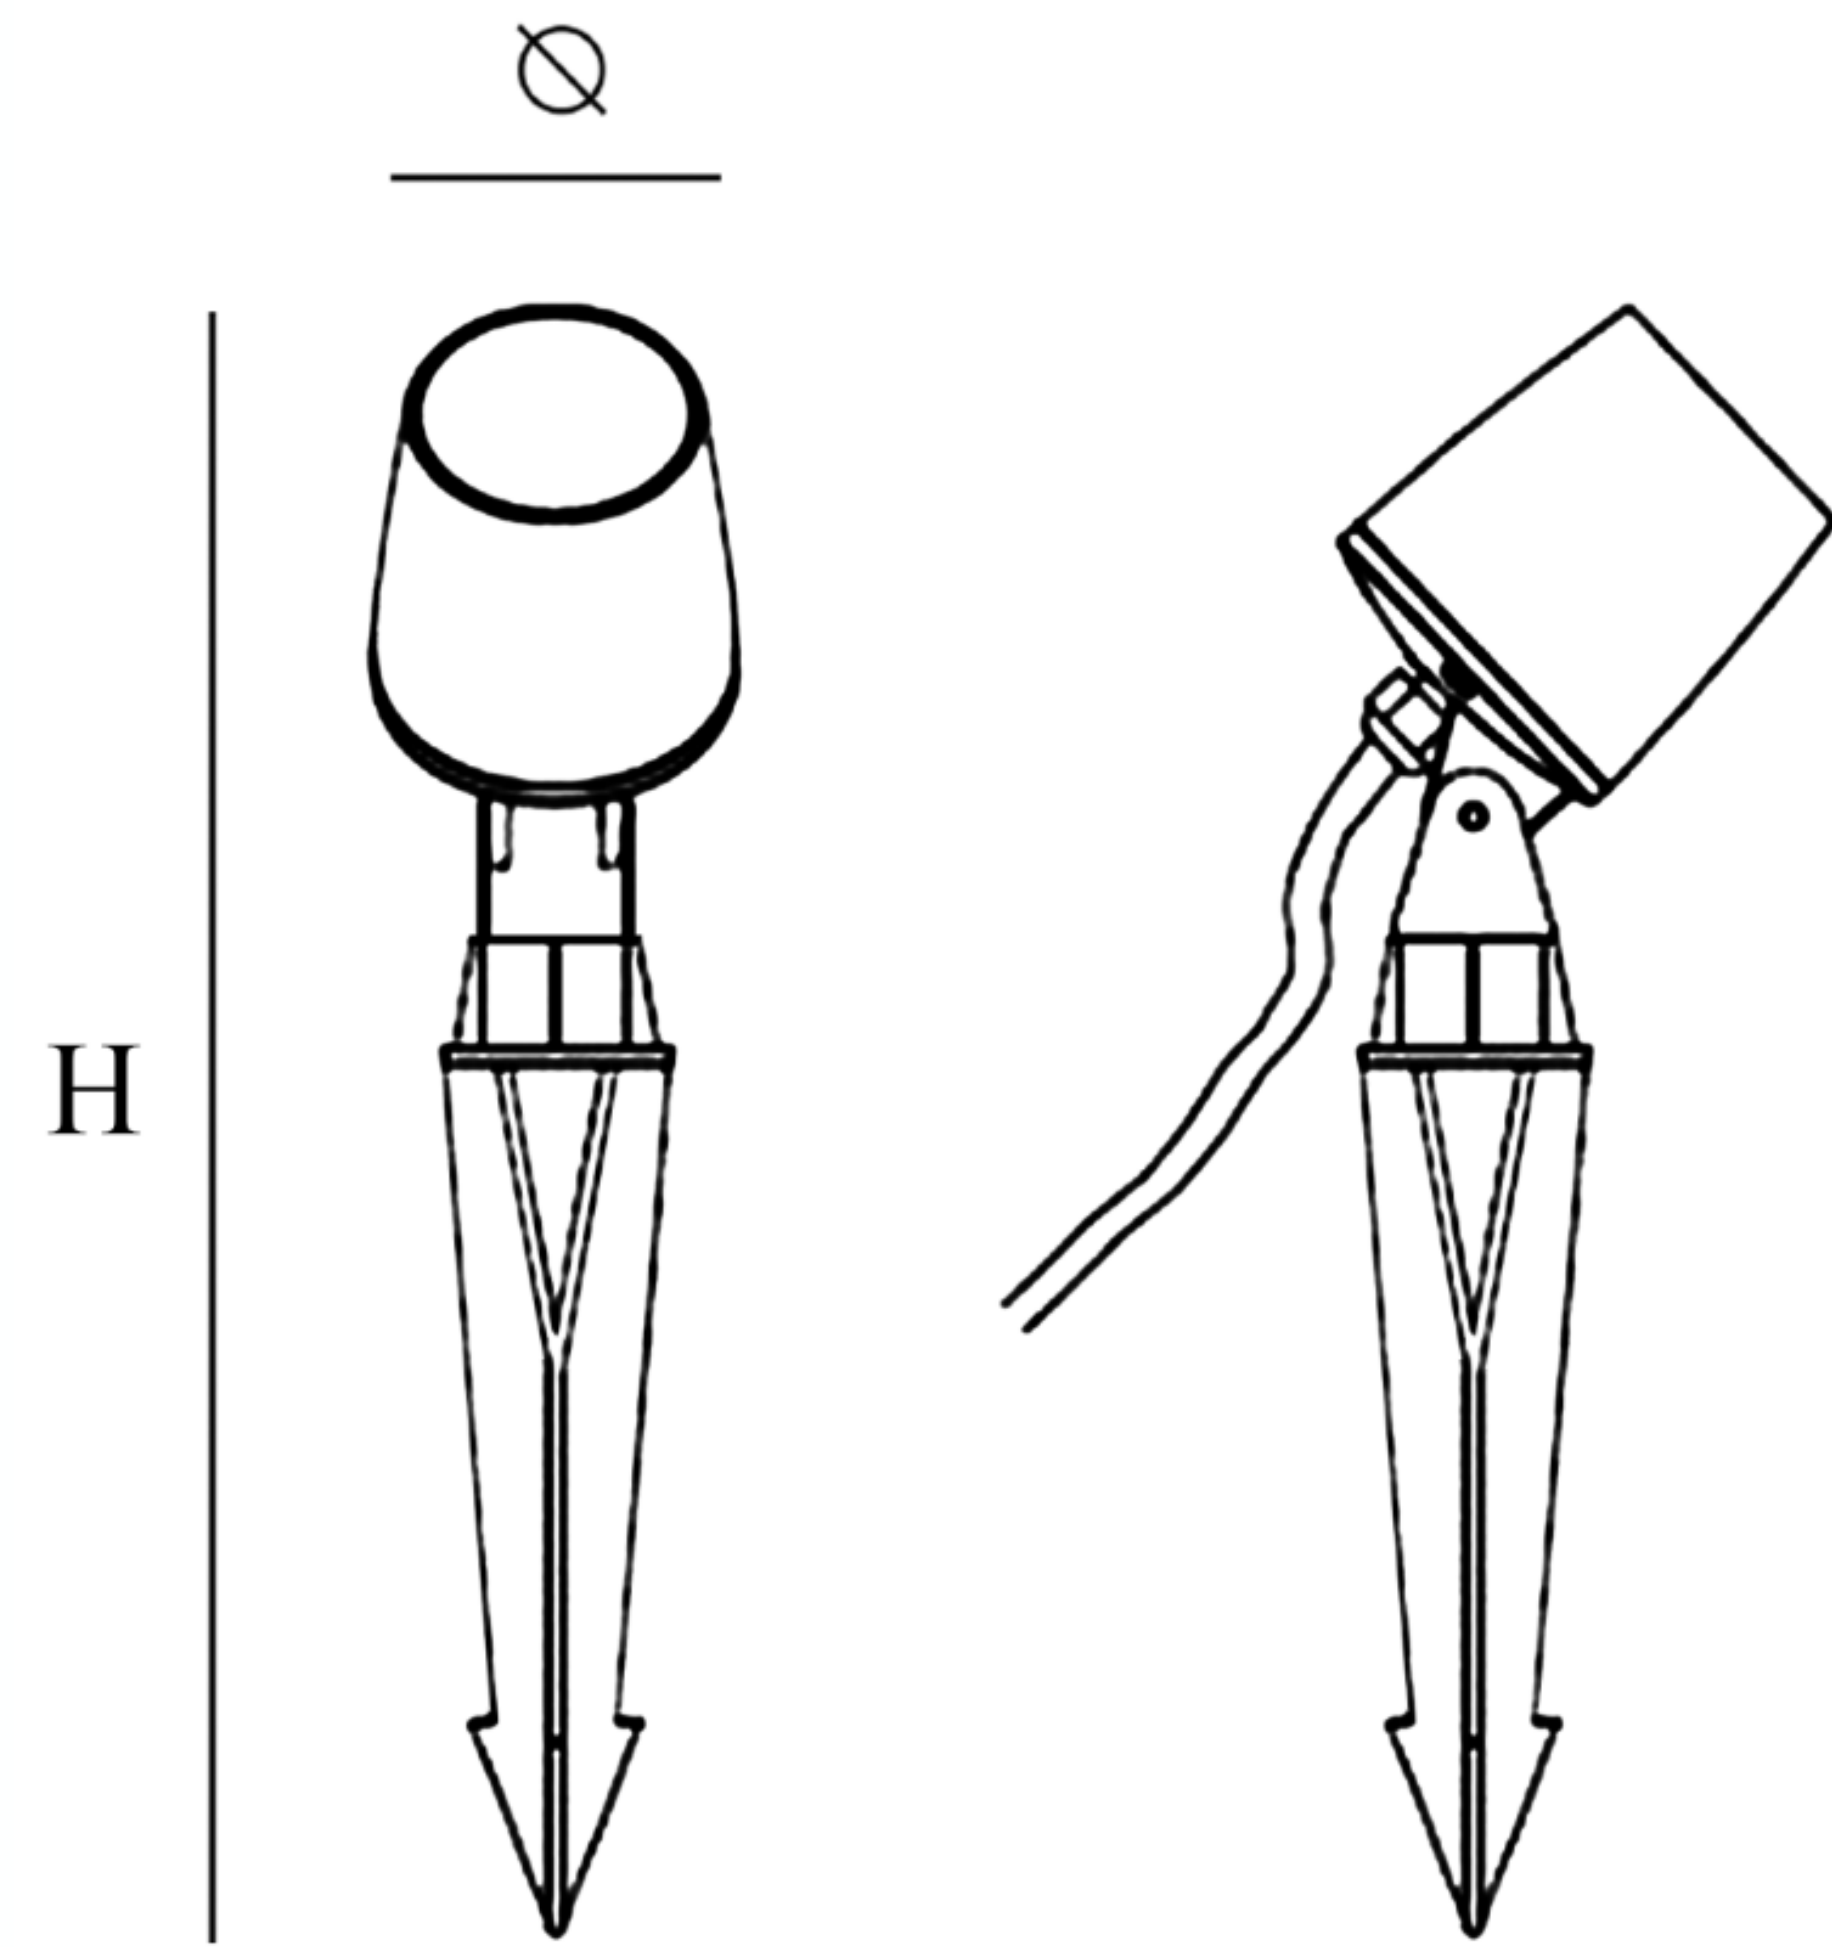

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

