

# Spike

SLT-S103



## PERFORMANCE DATA

**Efficacy :** 87.4 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 36°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminum Die Cast

**Mounting :** In Ground



**Lens :** Clear Tampered Glass

**Finish :** Gray RAL 7016


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

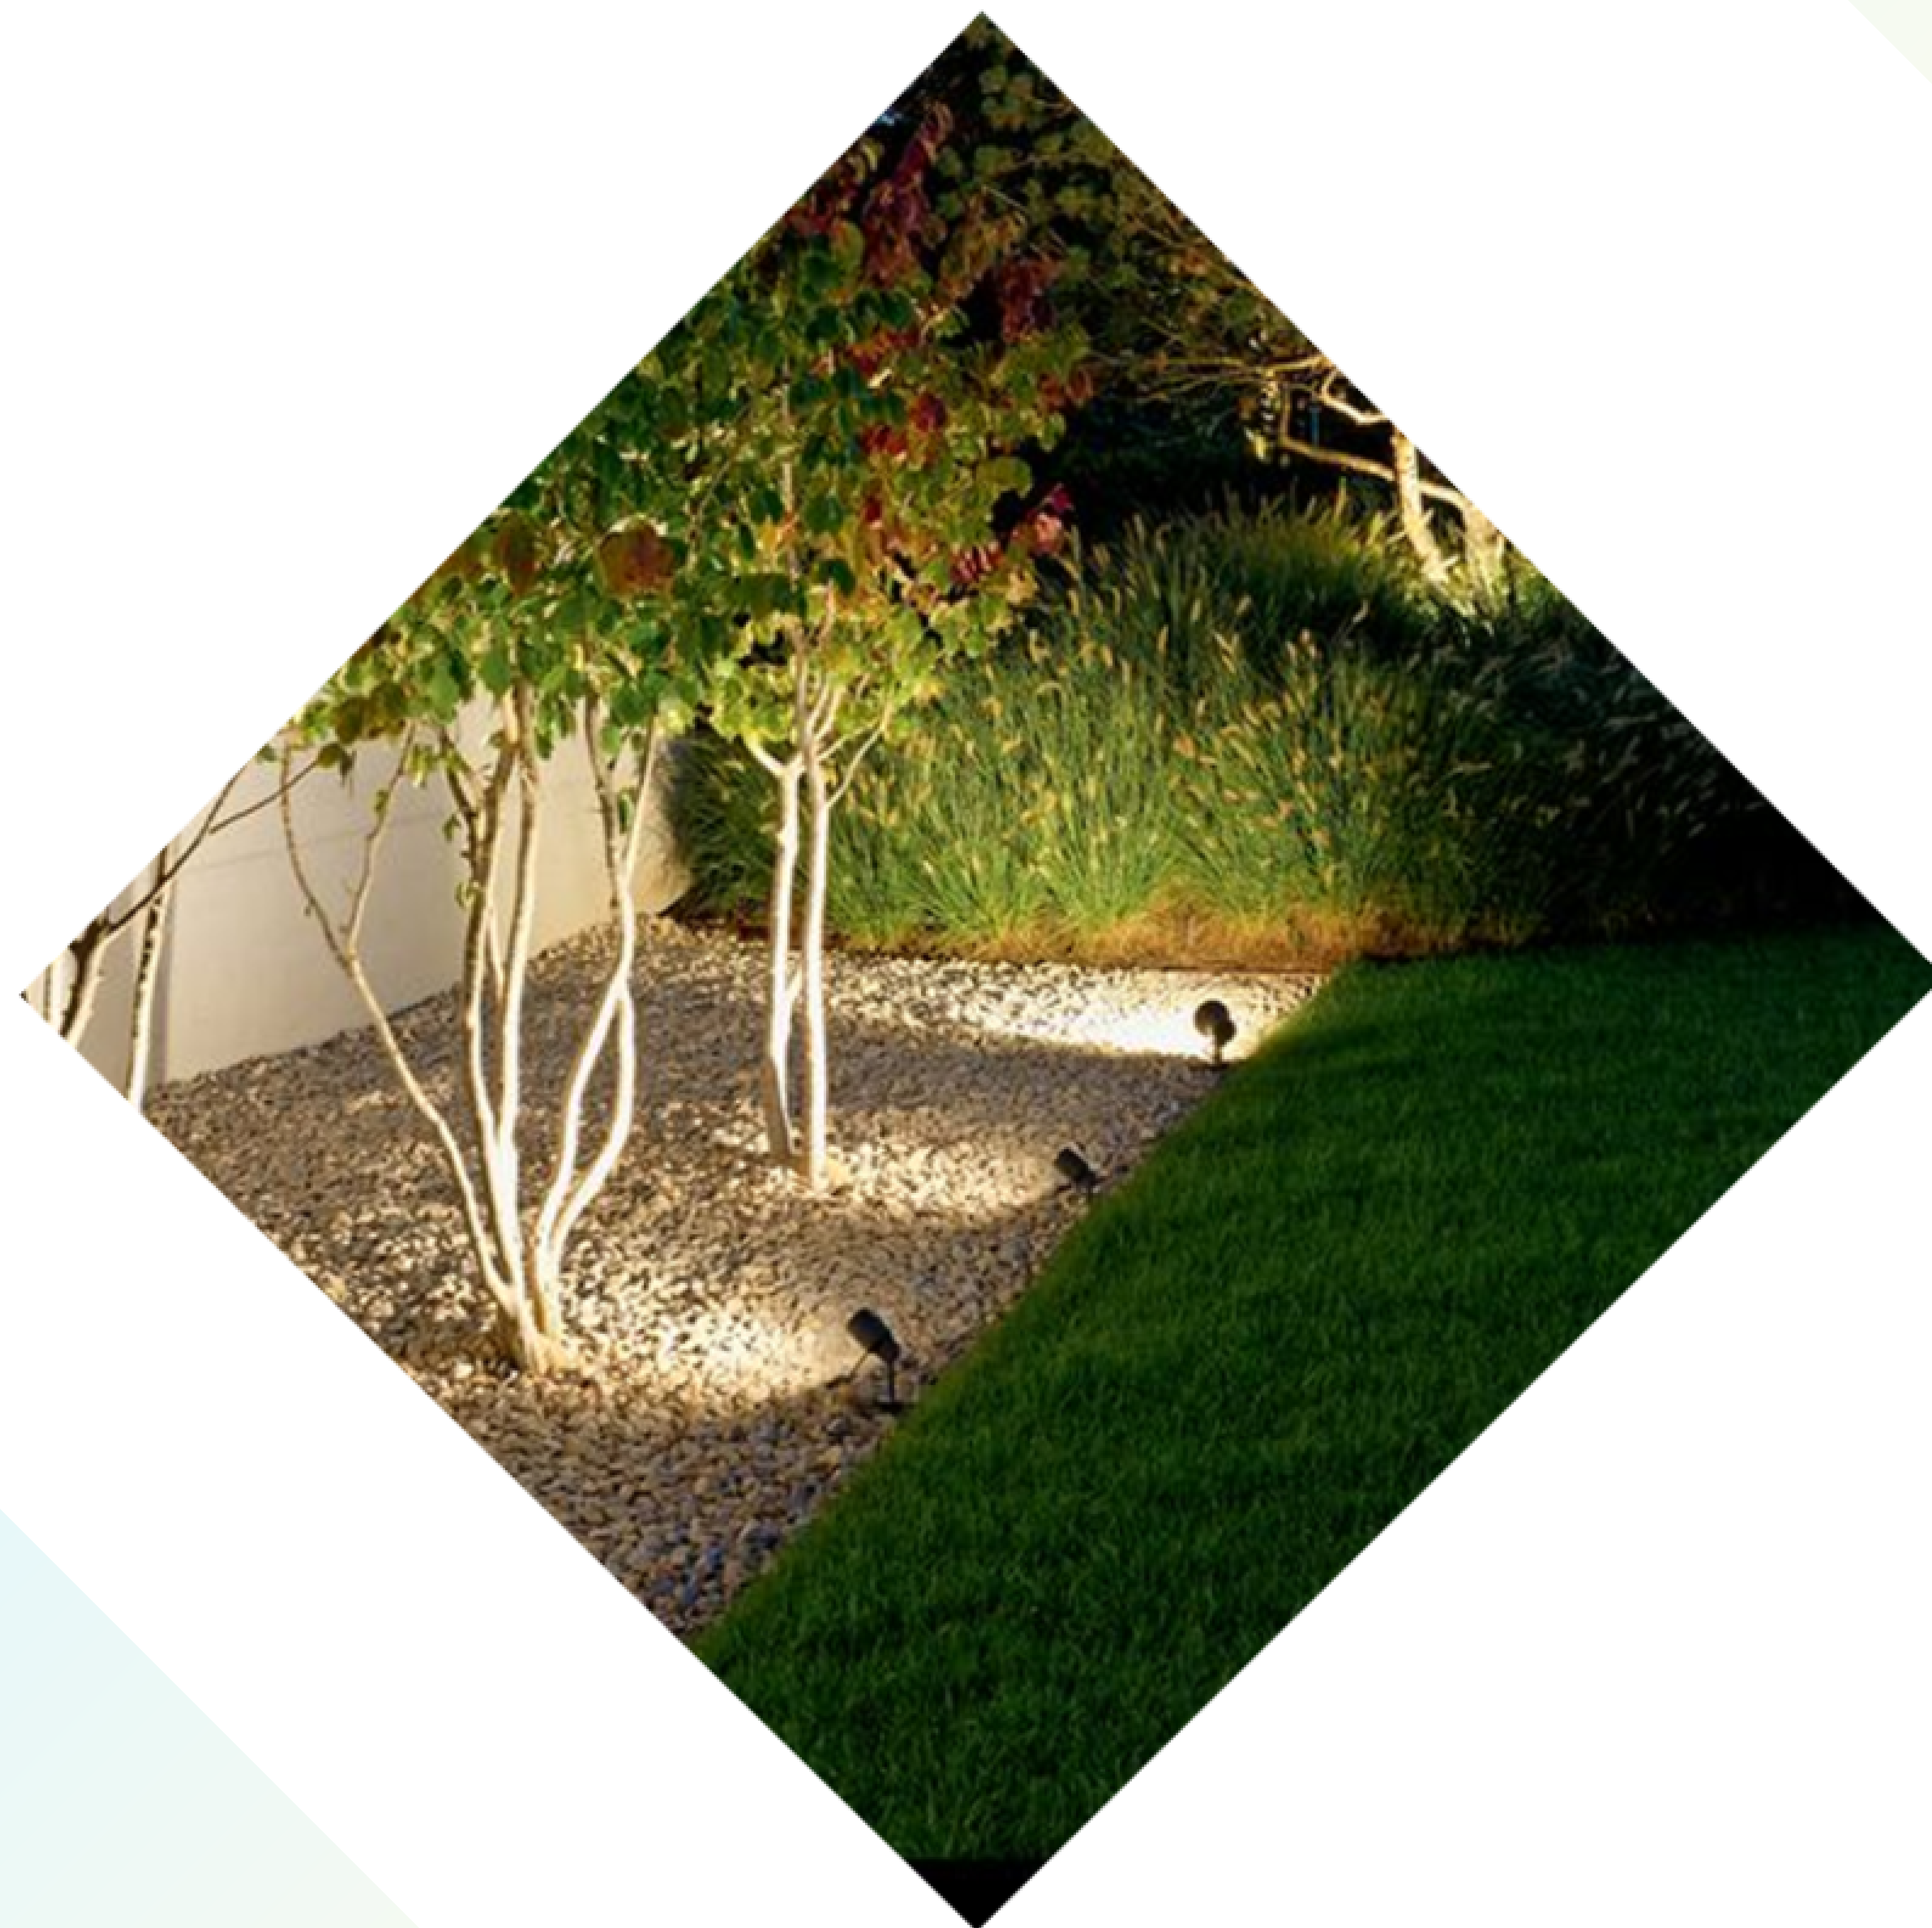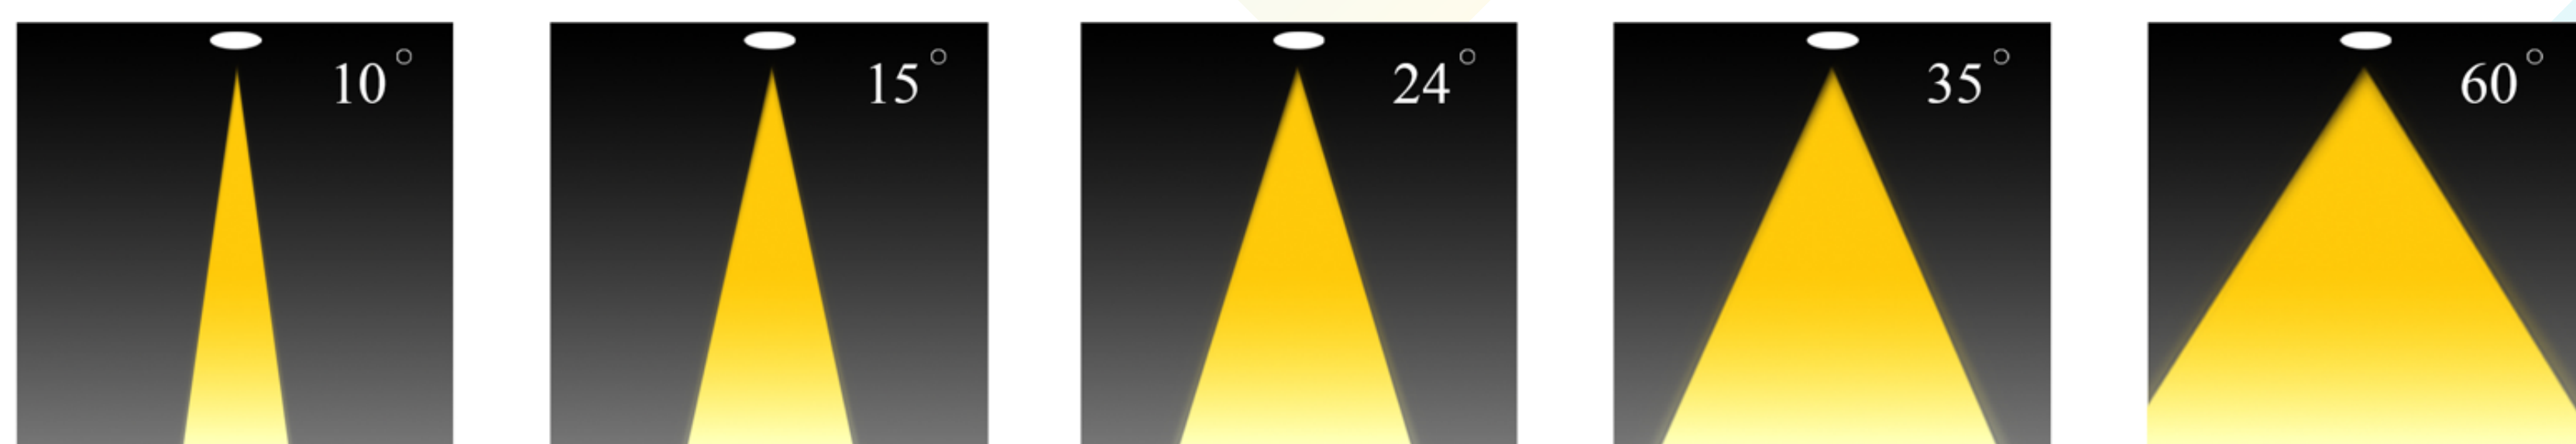

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
S102330X0XXCD010	10	87.4	3000	80x194 mm	Done	Cree	1.070

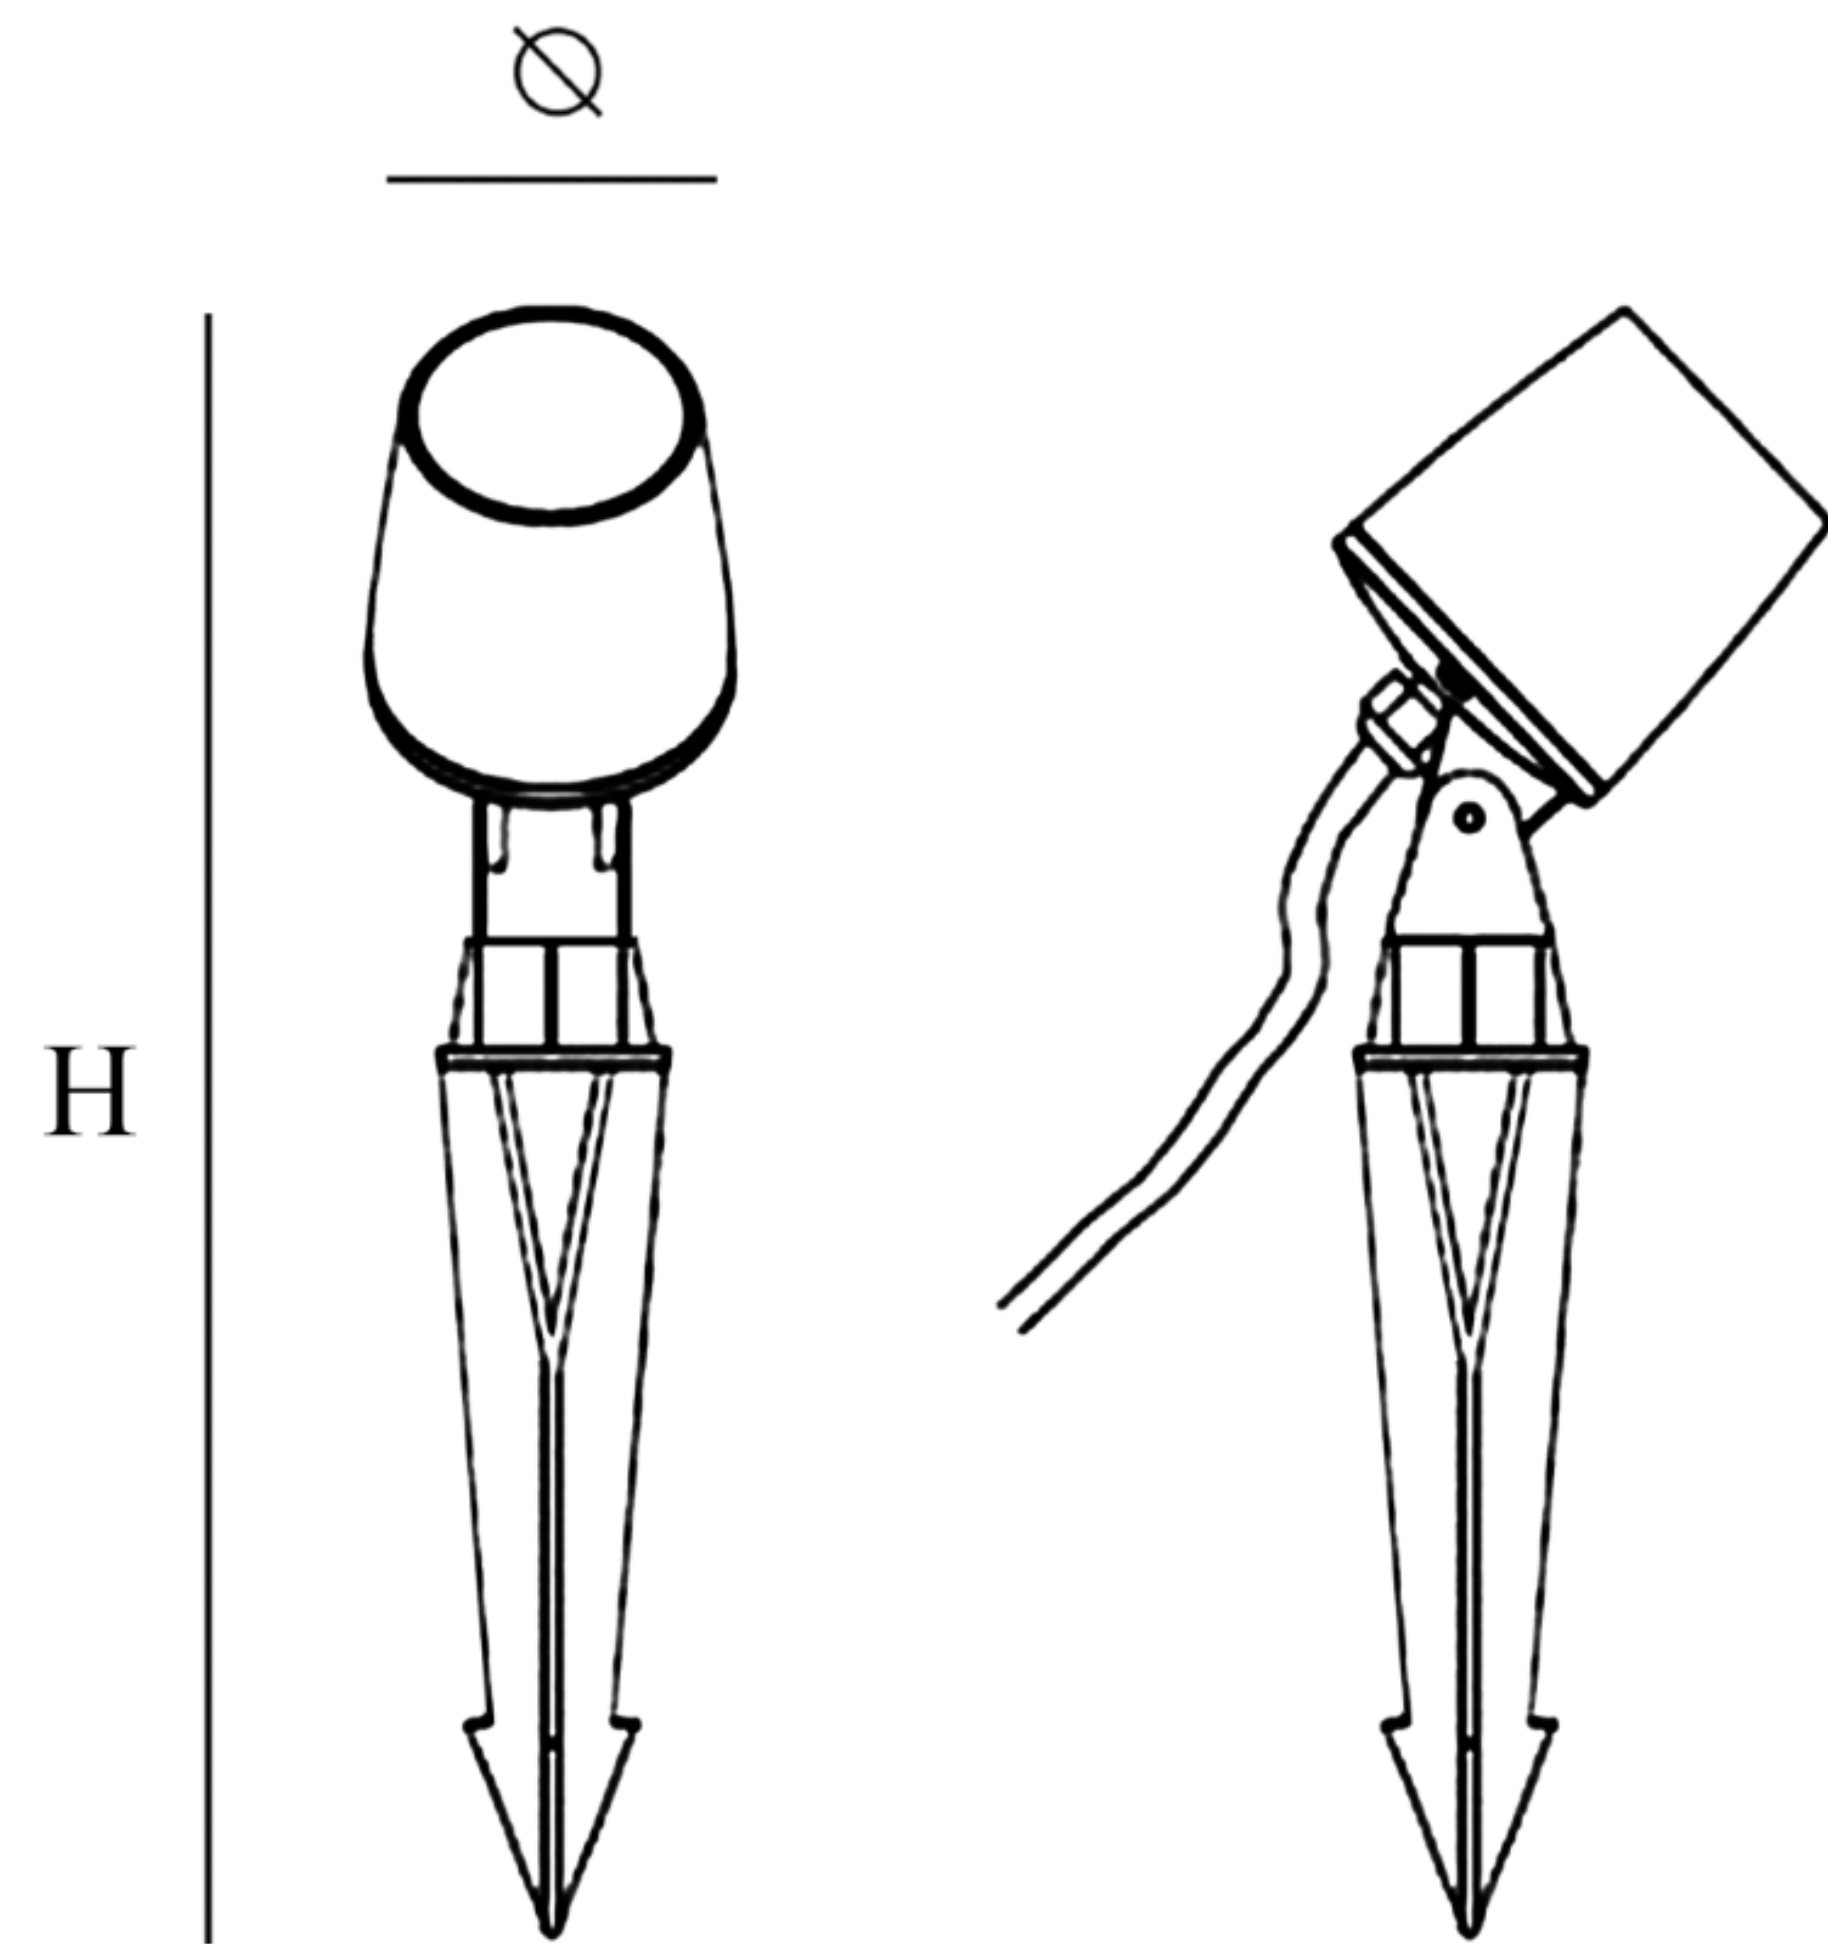

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

