

# Spike

SLT-S104



## PERFORMANCE DATA

**Efficacy :** 90 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 60 °

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminum Die Cast

**Mounting :** In Ground


**Lens :** Glass

**Finish :** Black

**Protection Class :** IP 65 - IP 67


**Mechanical Resistance :** IK 08

## OPTICS

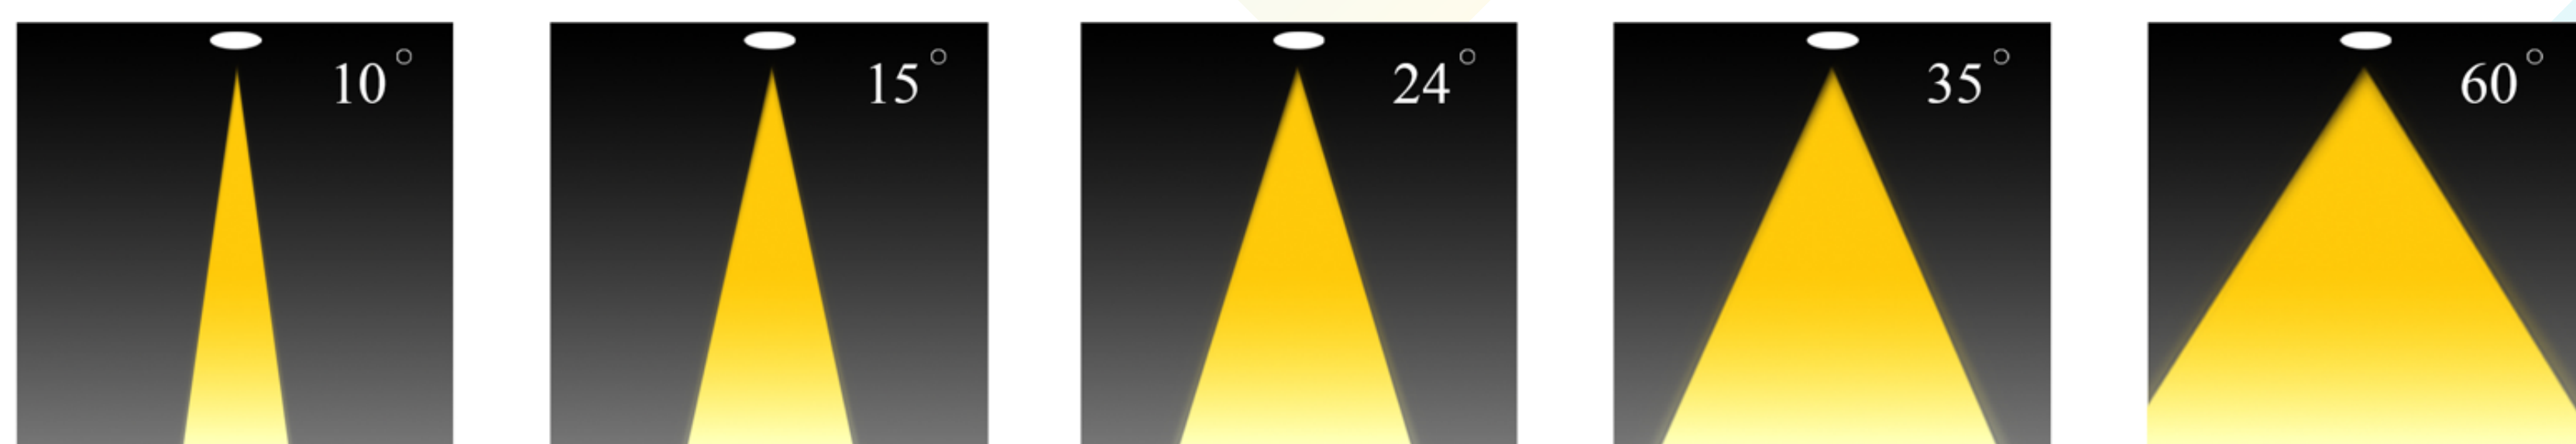



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xLxH mm	Driver	LED Chip	Weight
S104230XXXXOTXXX-XX	10 14	90	3000	100x205x390 mm	Tridonic	Osram	

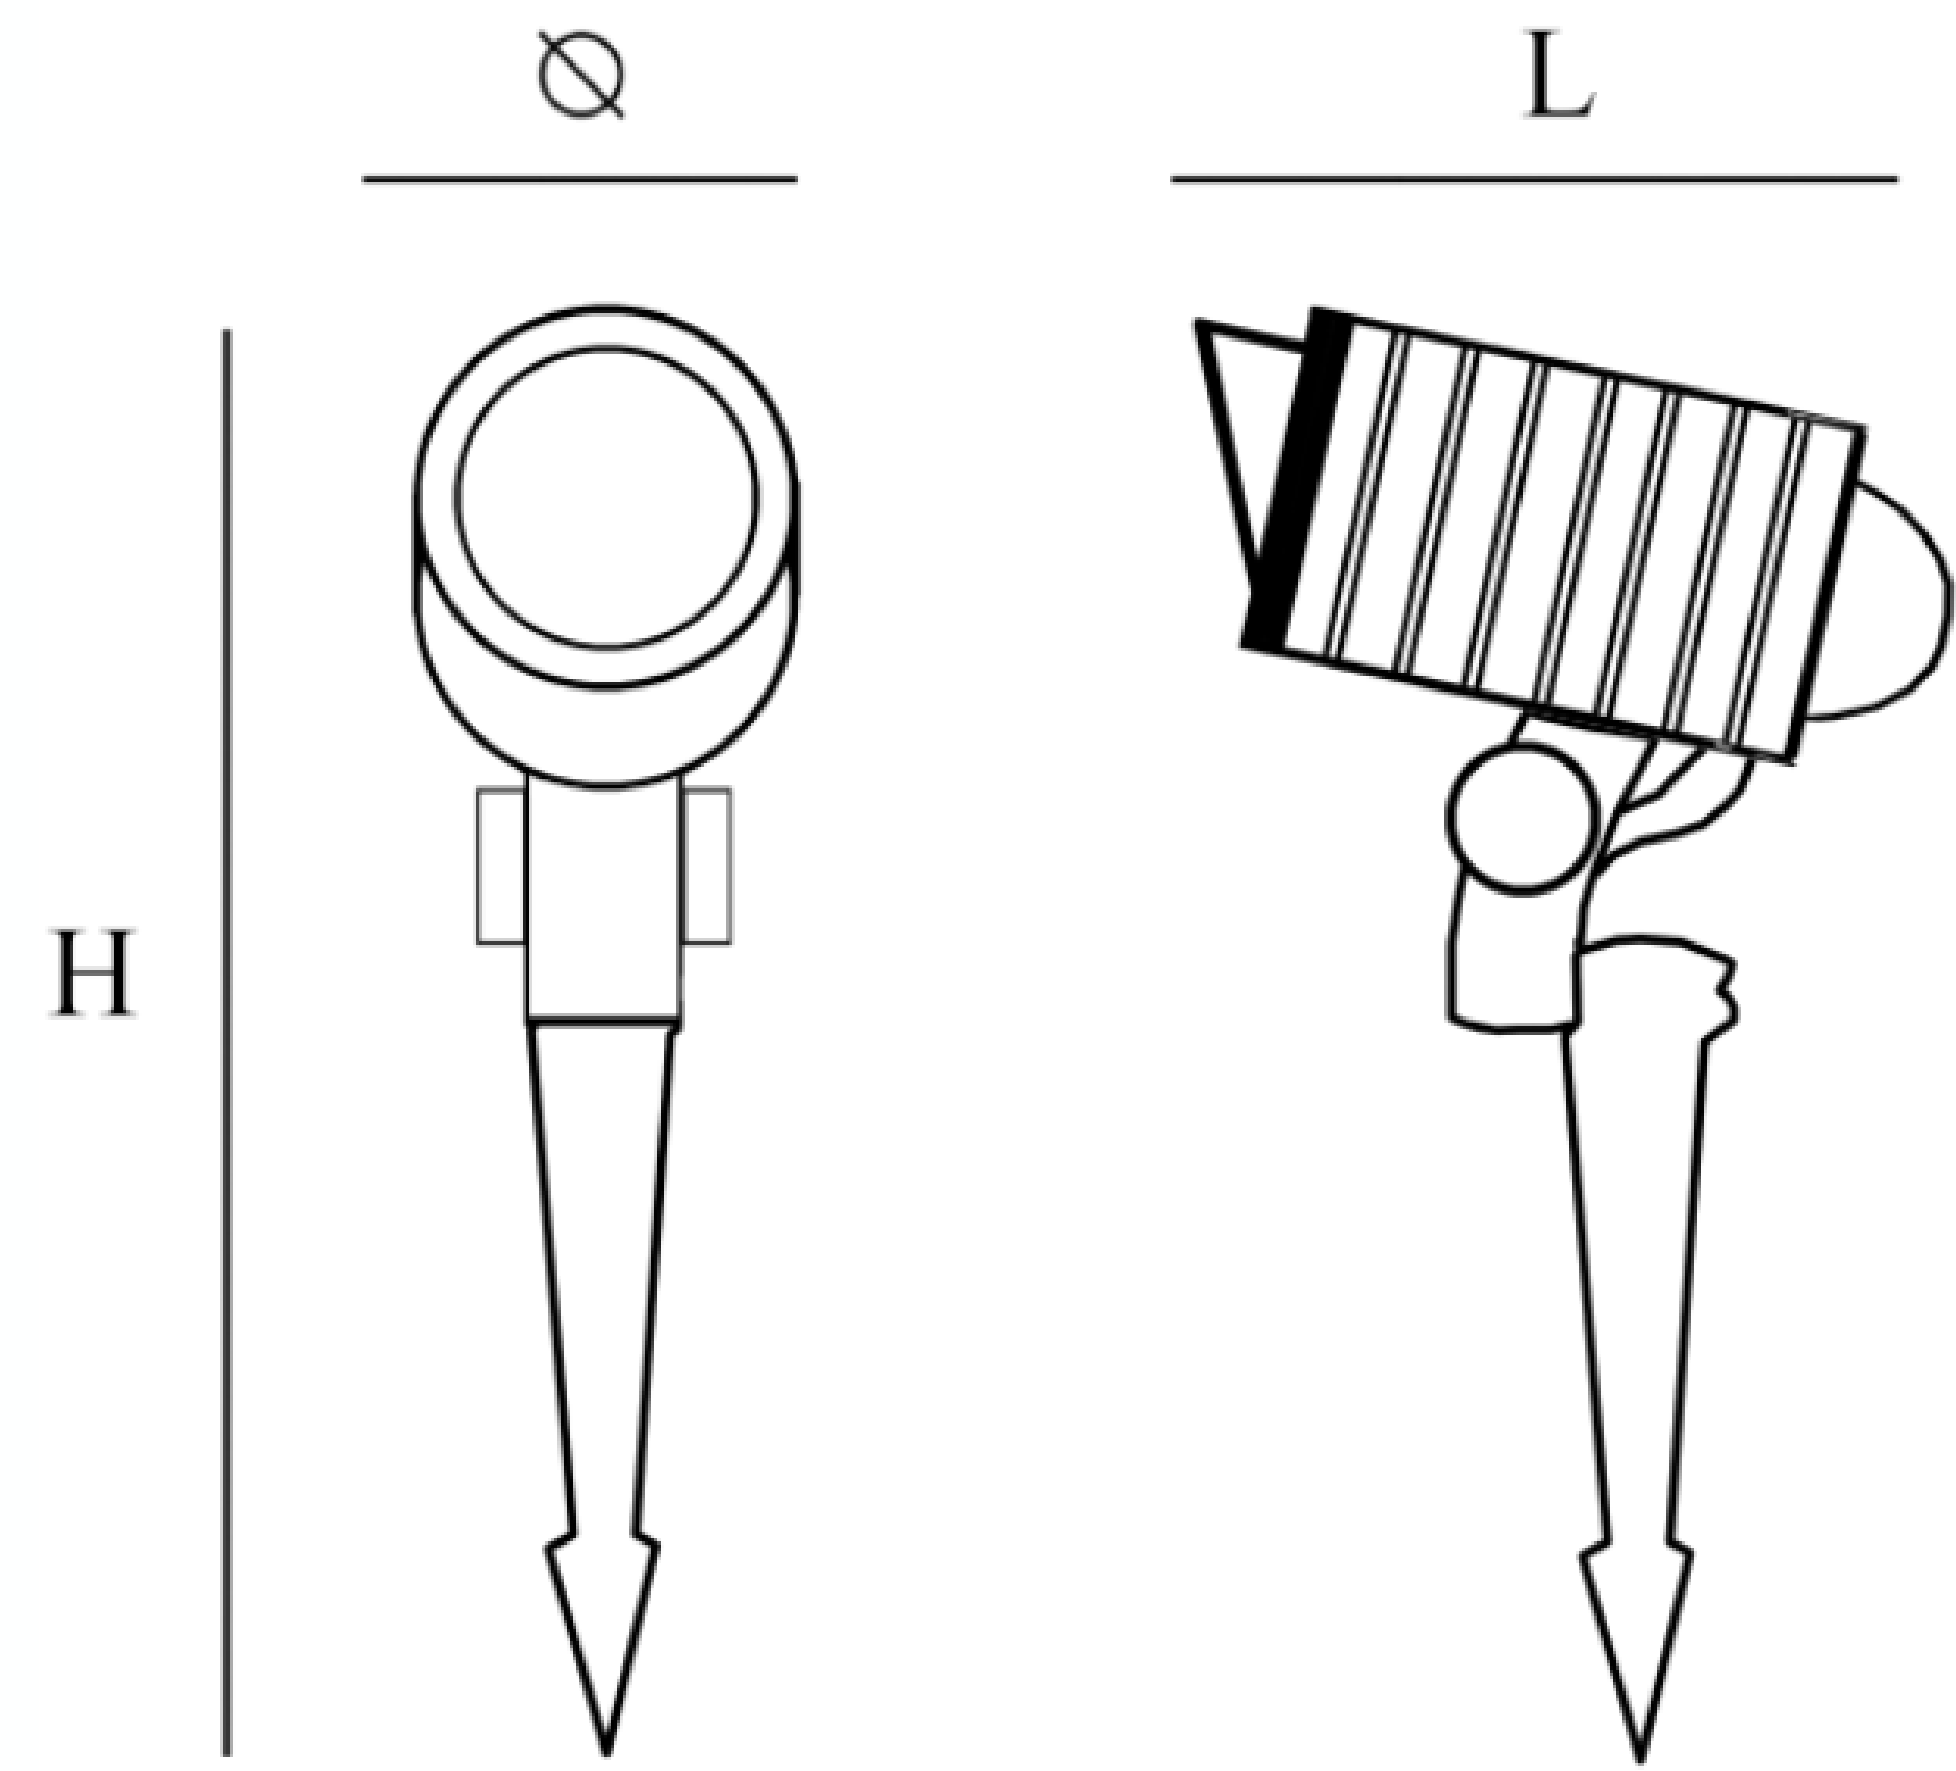

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

