

Spike

SLT-S105



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 60°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : In Ground



Lens : Glass

Finish : Black


Protection Class : IP 65 - IP 67

Mechanical Resistance : IK 08

OPTICS

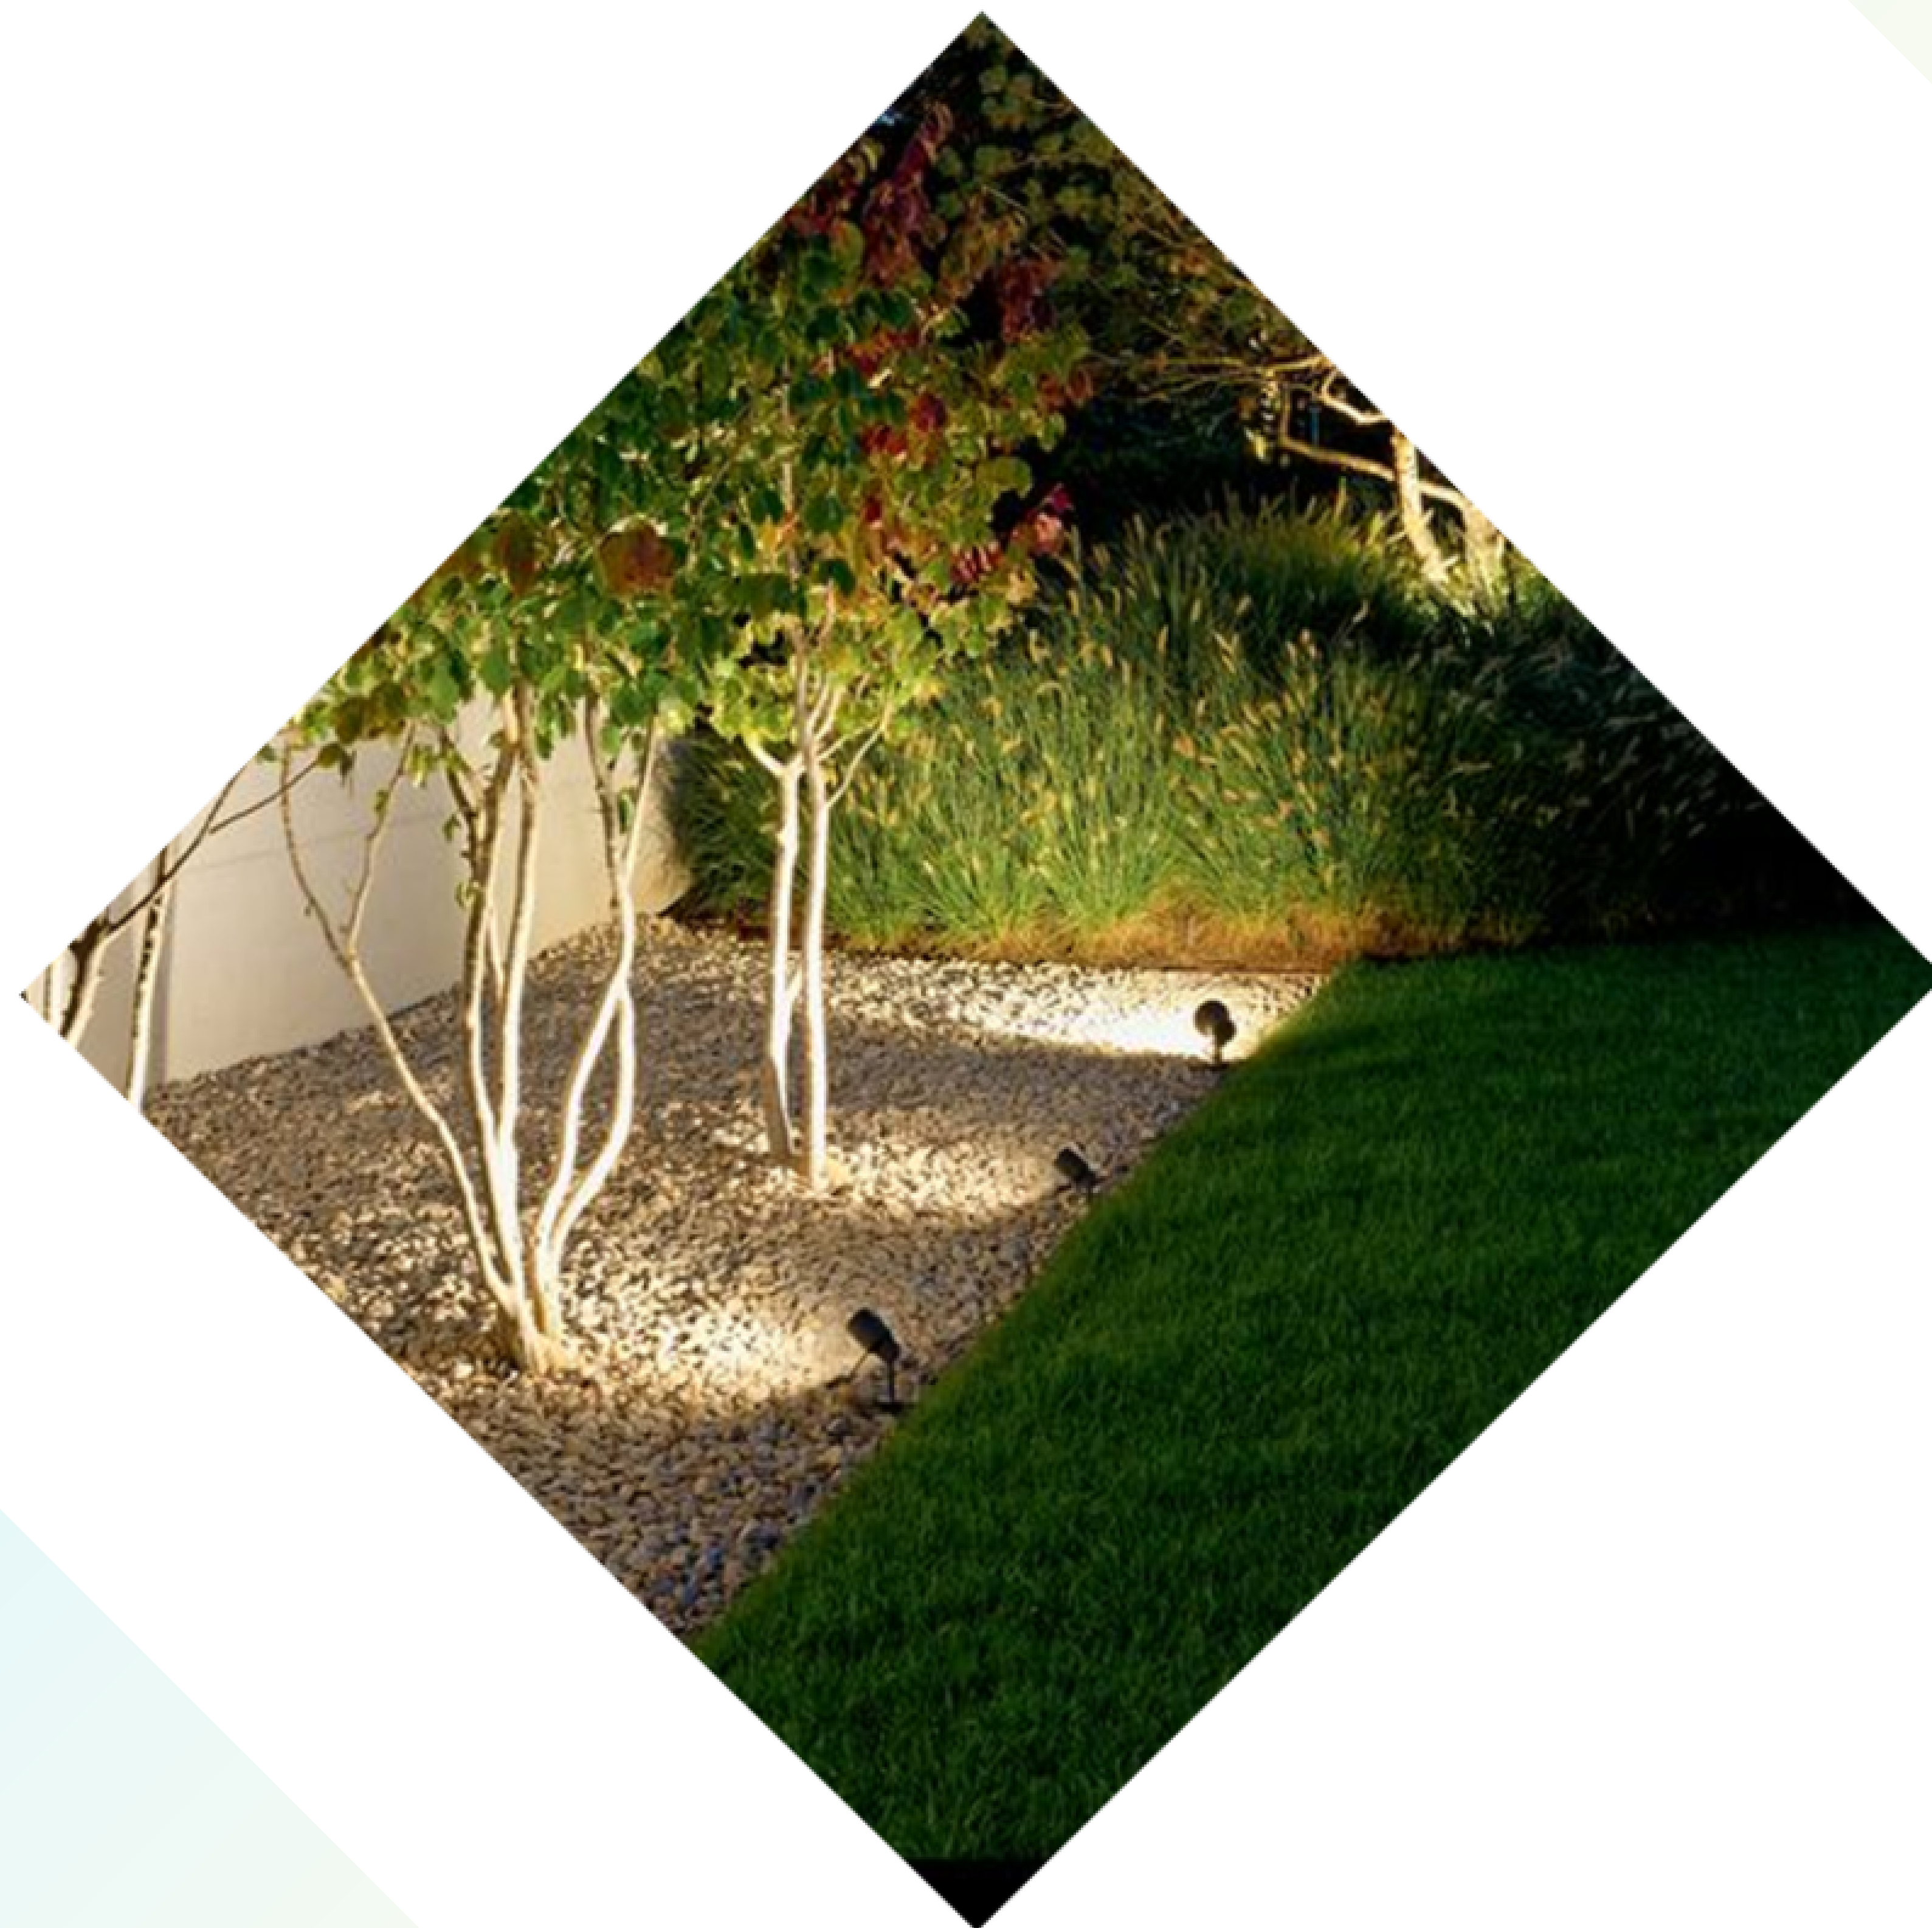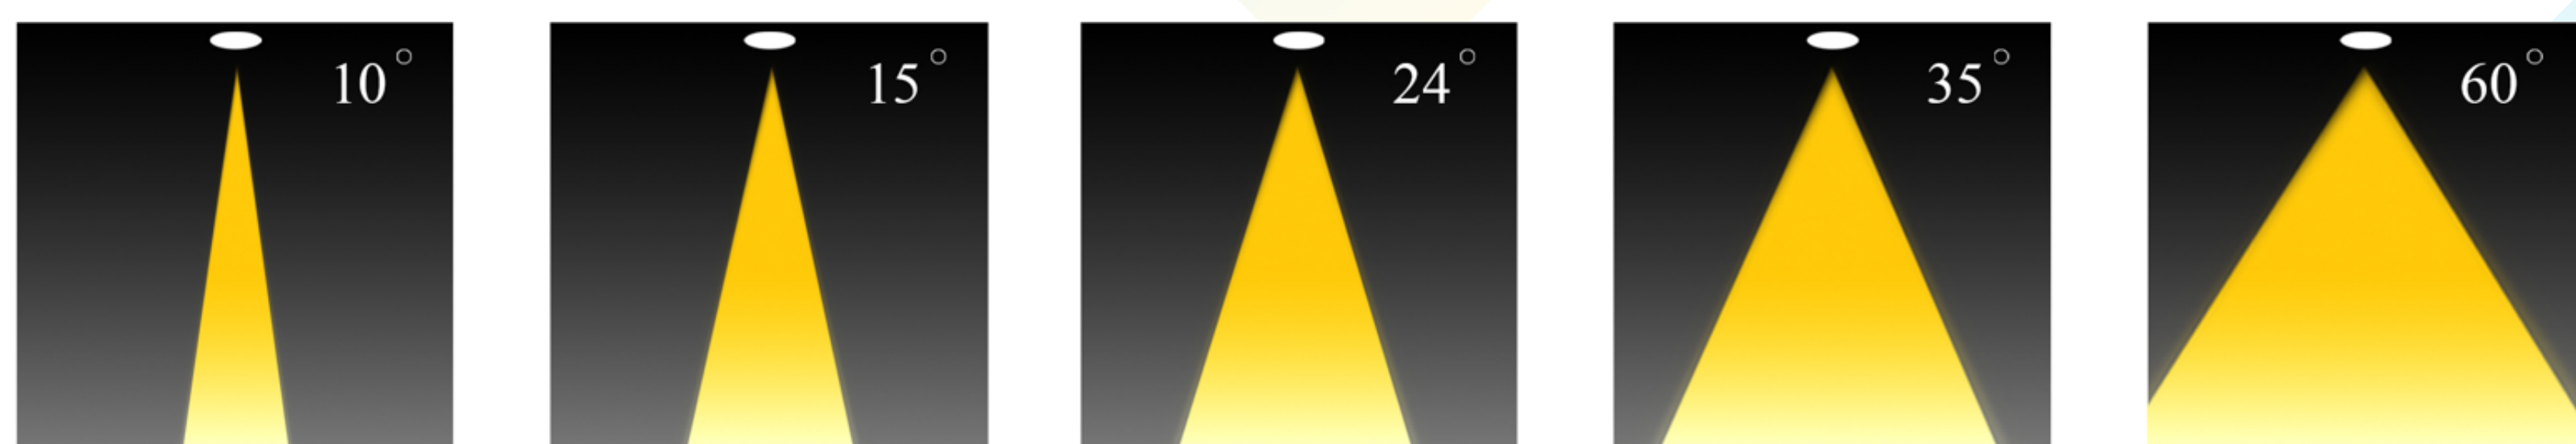

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xLxH mm	Driver	LED Chip	Weight
S105230XXXXOTXXX-XX	10 14	90	3000	145x205x435 mm	Tridonic	Osram	

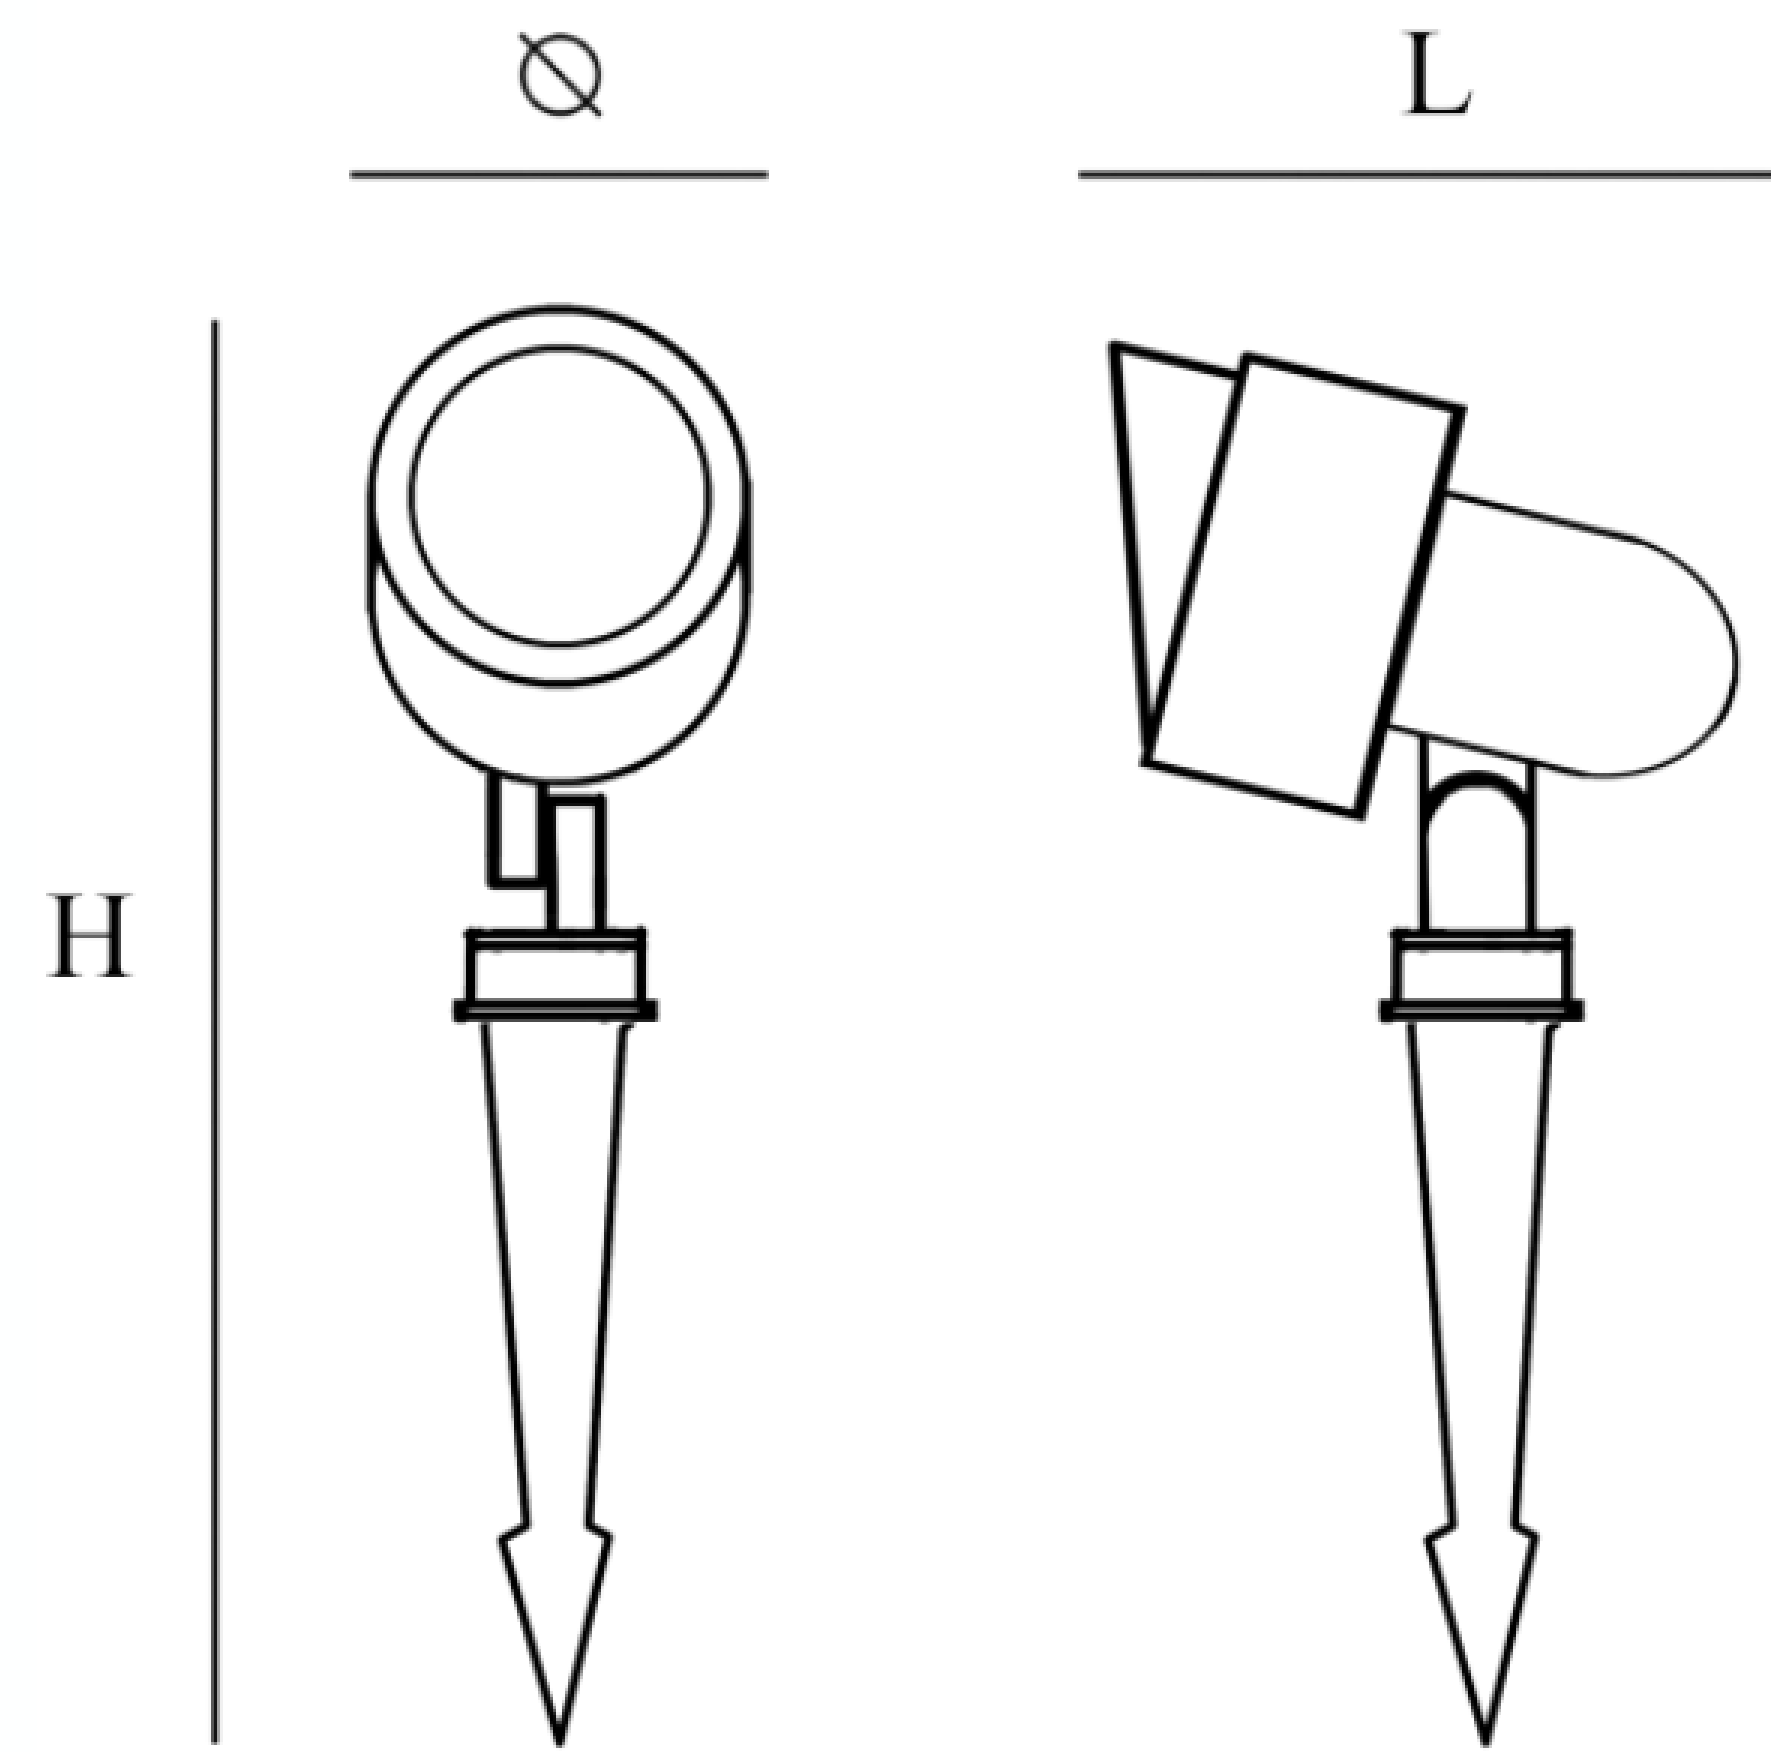

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

