

Uplight

SLT-U004



PERFORMANCE DATA

Efficacy : 120 Lm/W

Input Voltage : 220VAC

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 30°

Class : II

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast- Stainless steel frame

Mounting : In ground


Lens : Glass

Finish : Silver


Protection Class : IP 67

Mechanical resistance : IK 08

OPTICS

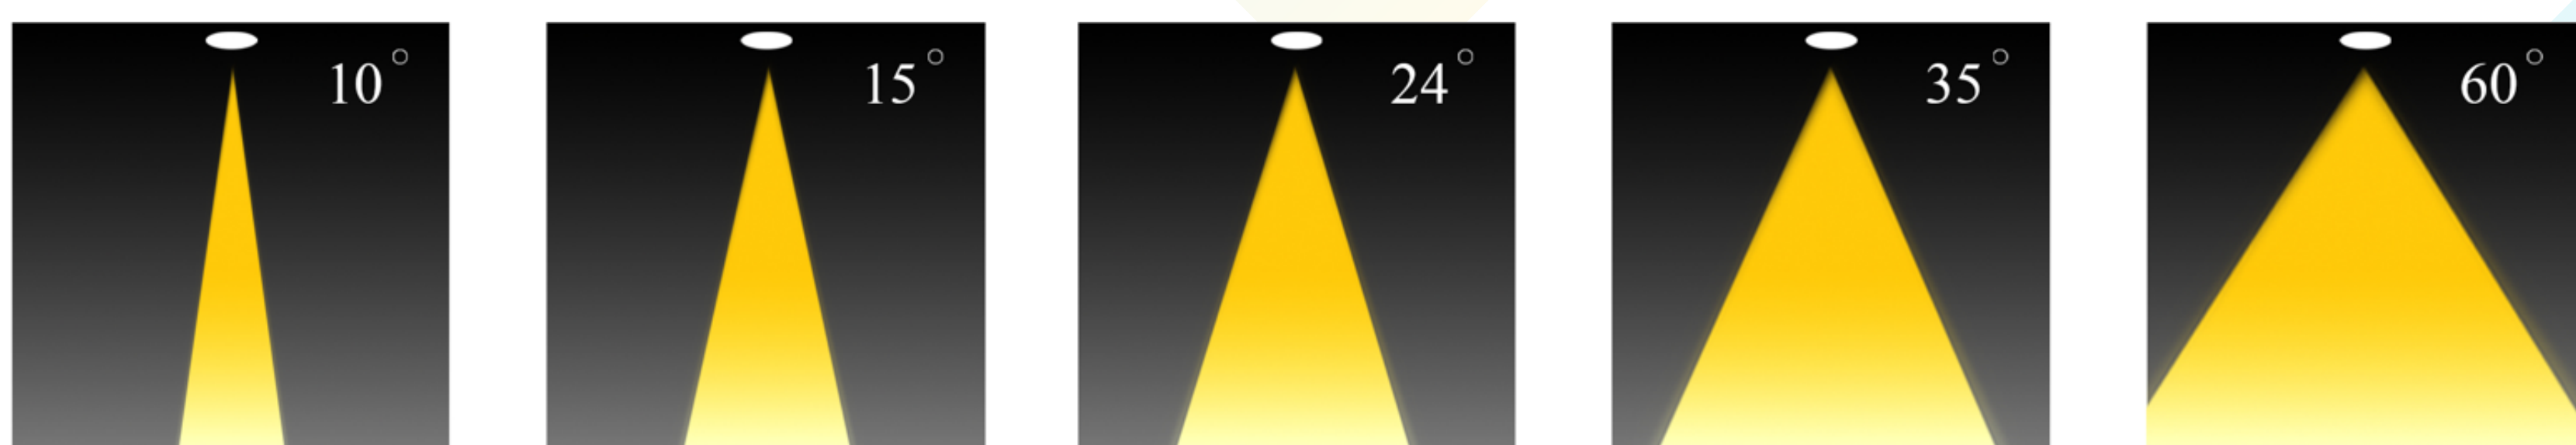

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A - B mm	Driver	LED Chip	Weight Kg
U043308030CXXXX	6 10 14	120	3000	130 x 110 mm 180 x 125 mm 180 x 125 mm	Tridonic Eaglerise	Cree	0.890

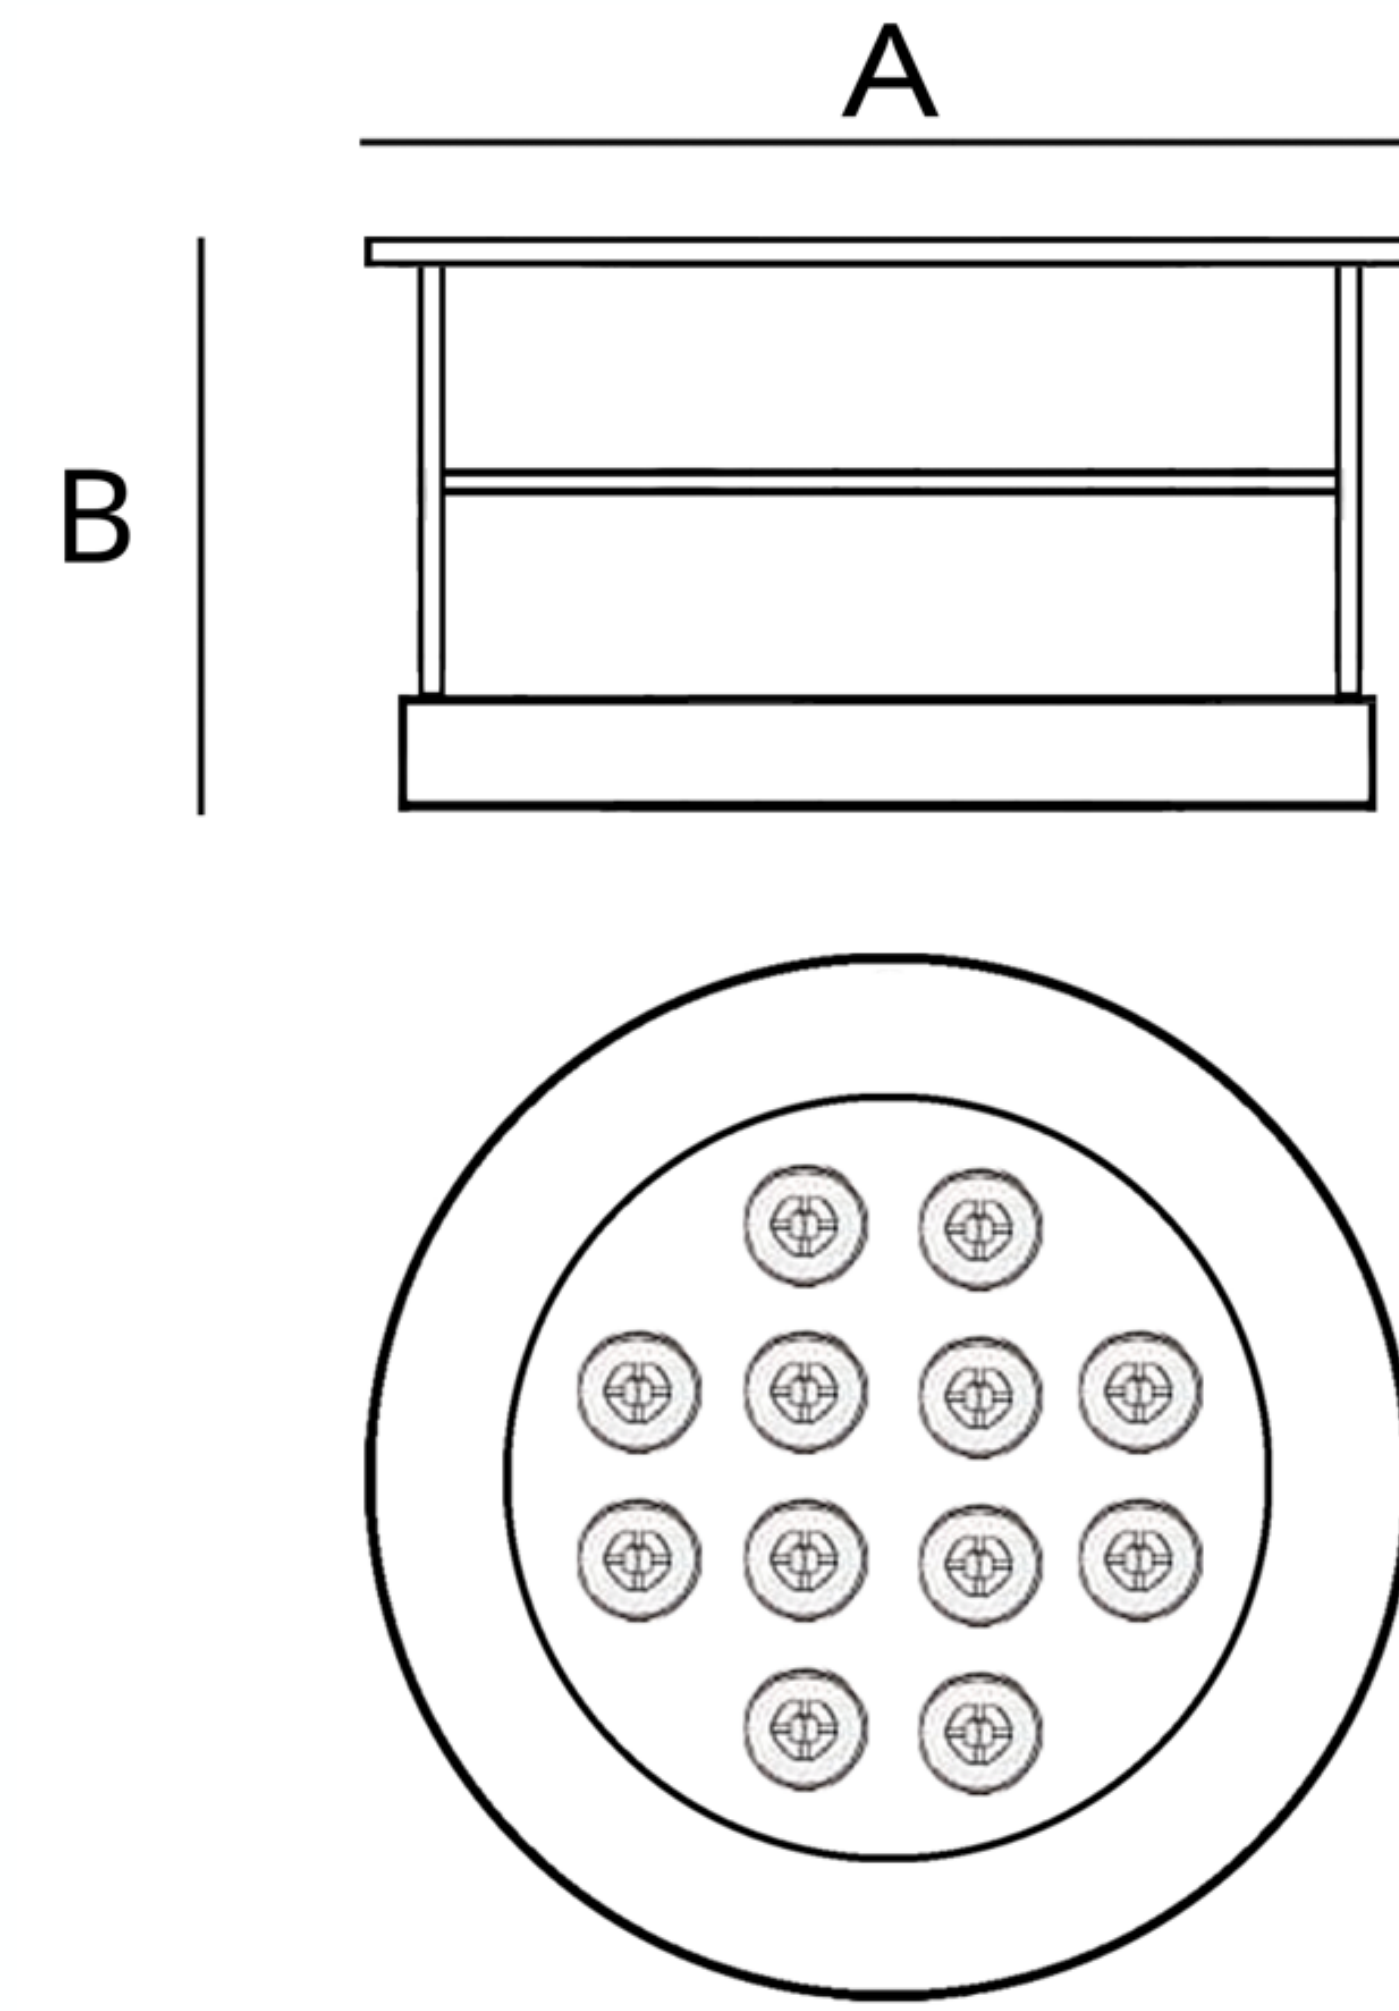

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

