

# Underwater

SLT-UN08



## PERFORMANCE DATA

**Efficacy :** 46.6 Lm/W

**Input Voltage :** 12-24V DC

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 30°

**Class :** III

## MECHANICAL SPECIFICATIONS

**Material :** Stainless Steel

**Mounting :** Embedded


**Lens :** Tempered Glass 6 mm Thickness

**Finish :** Stainless Steel


**Protection Class :** IP 68

**Mechanical Resistance :** IK 09

## OPTICS

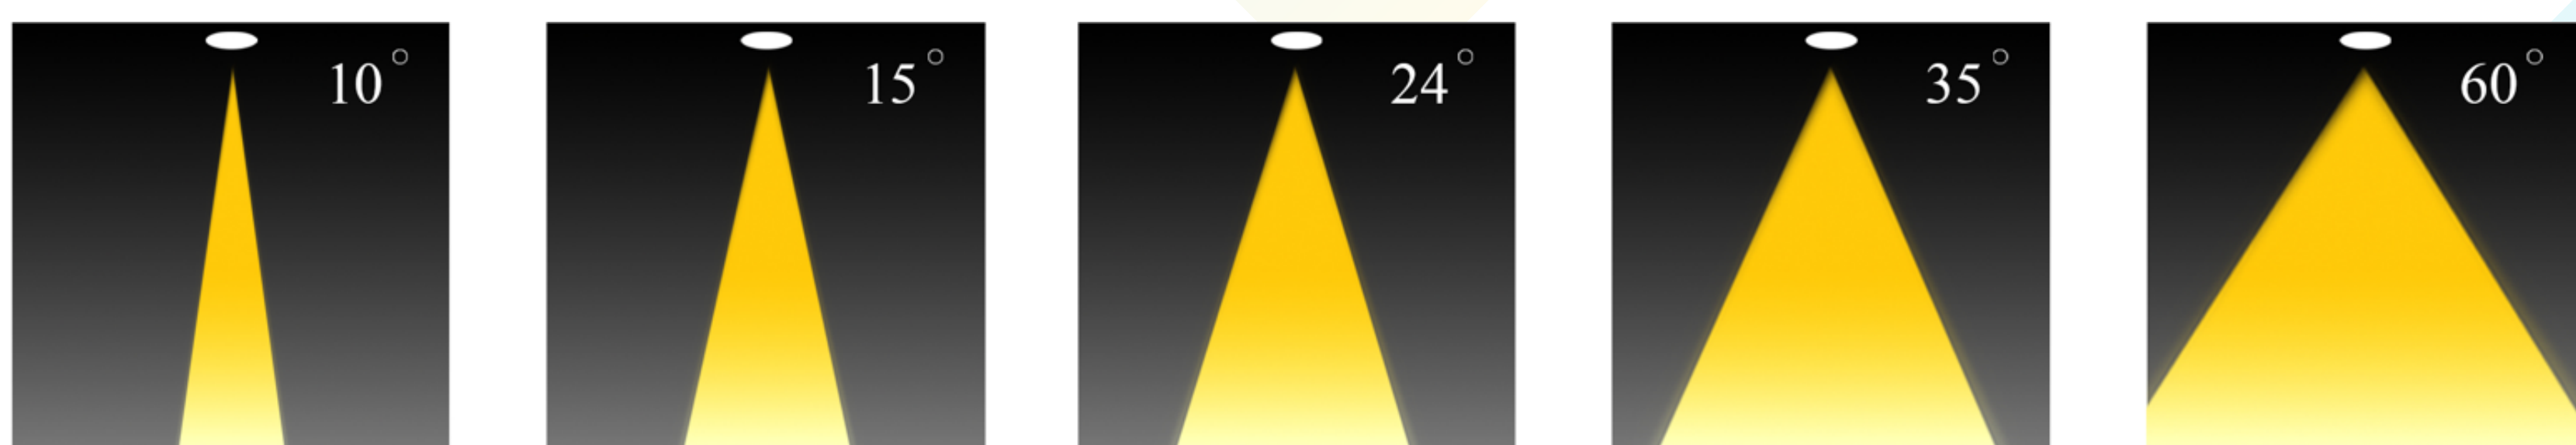

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ x H mm	Driver	LED Chip	Weight
UN083278030EX003	3	46.6	2700 3000	52x80 mm	Remote Driver (Meanwell)	Epistar	

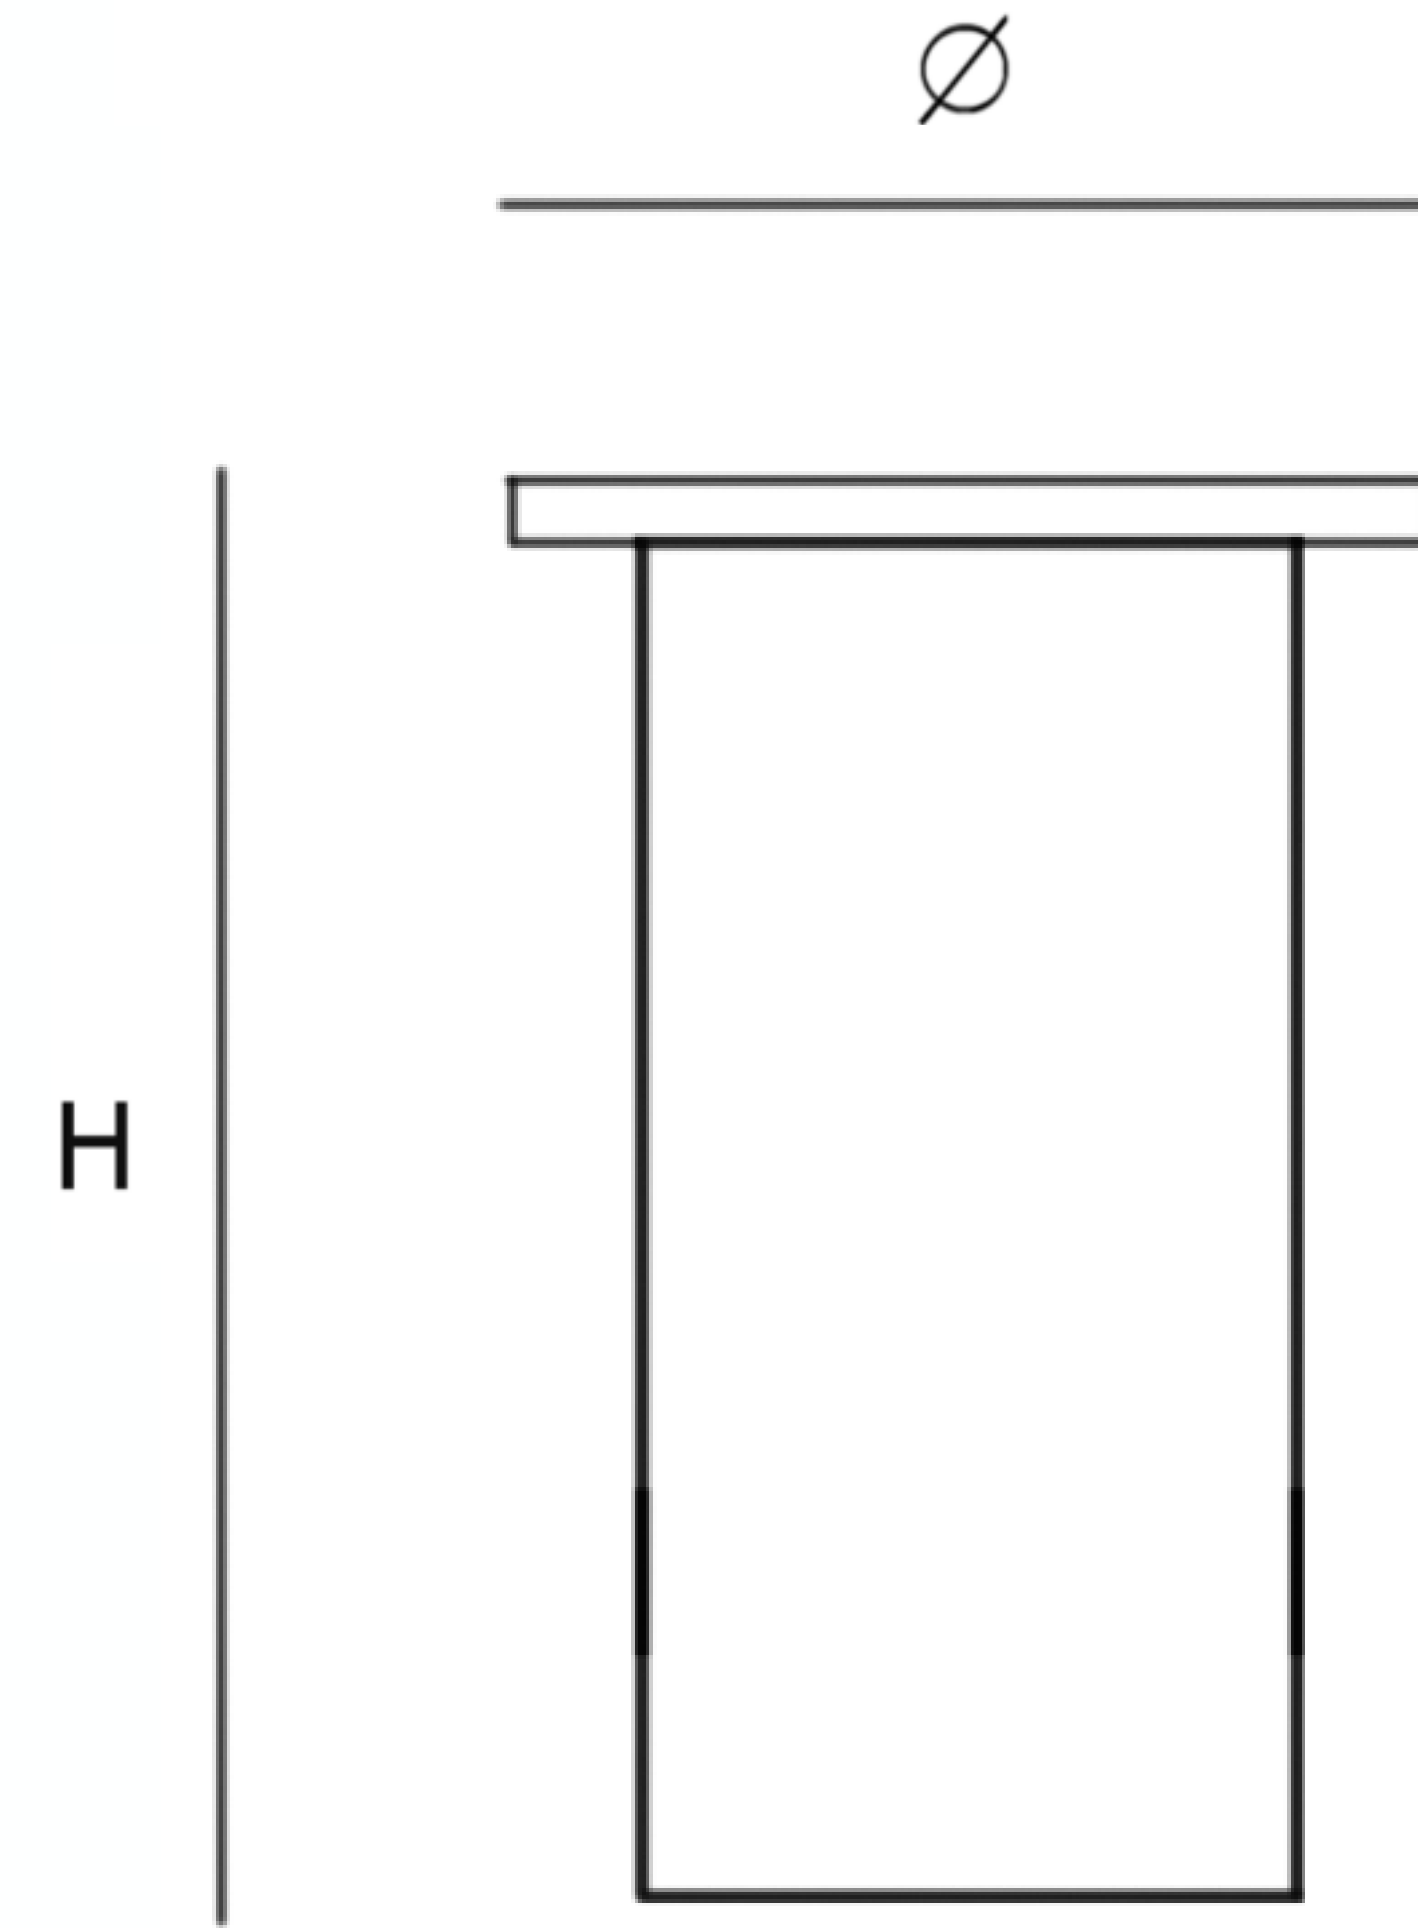

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

