

Underwater

SLT-UN10



PERFORMANCE DATA

Efficacy : 46.6 Lm/W

Input Voltage : 24V AC/DC

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : RGB

Life Time : 50.000 hrs

Optic : 30°

Class : III

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : Surface Under Water


Lens : Tempered Glass 8 mm Thickness

Finish : Stainless Steel

Protection Class : IP 68

Mechanical Resistance : IK 09

OPTICS

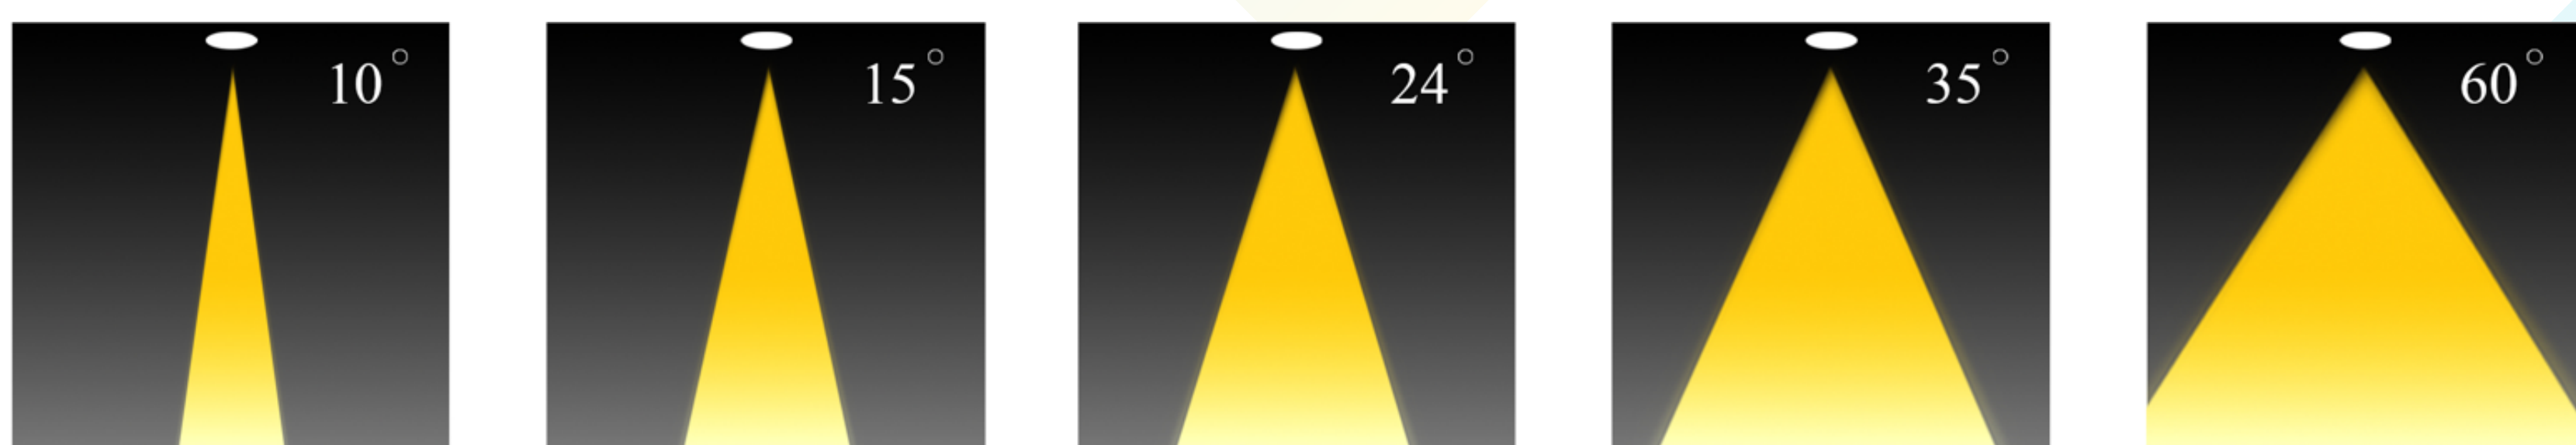

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø x H mm	Driver	LED Chip	Weight Kg
UN10RGB378030CX045	45	46.6	RGB With DMX	175x181 mm	Remote Driver (Meanwell) + DMX Controller	Cree	4




DMX Controller



Build-in DMX decoder



Fixture

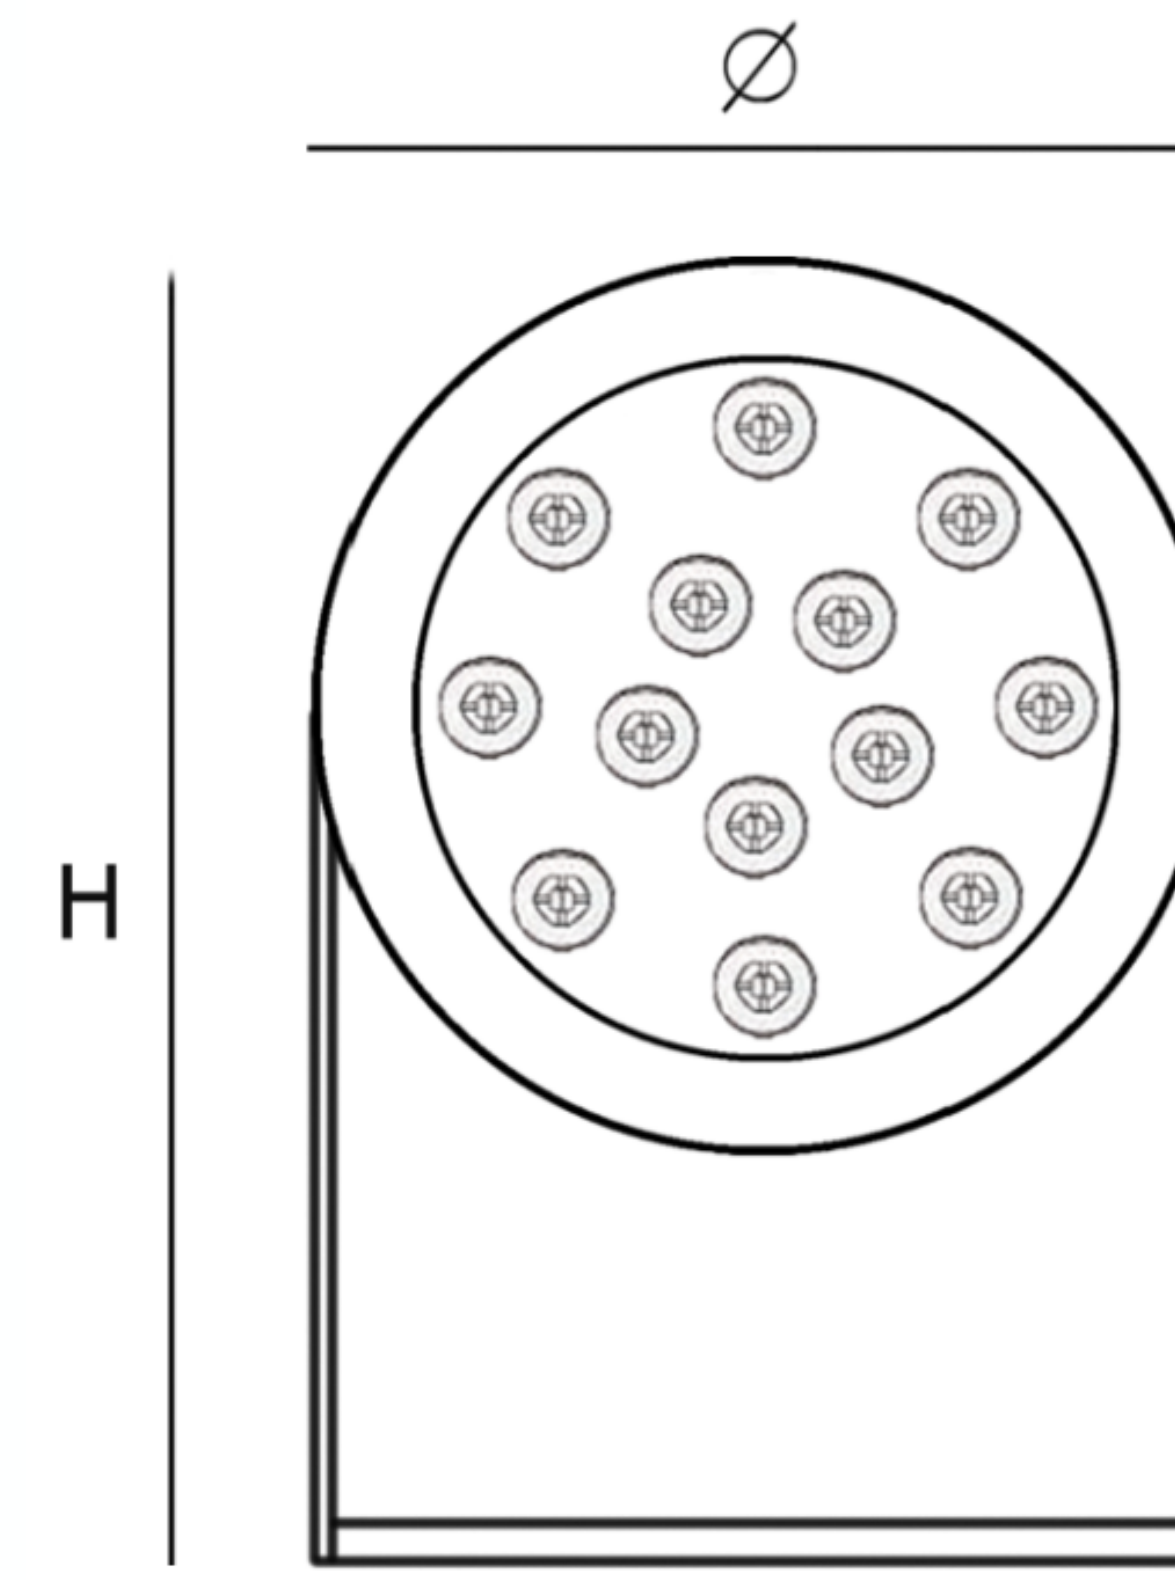

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI
>80

Color Rendering Index >80

DALI

IK10

POLAR CURVE

