

LED Strip

SLT-LS20-5M



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Thermoplastic

Mounting : Suspended, Surface


Lens : Rubber

Protection Class : IP 20

Mechanical Resistance : IK 03



OPTICS

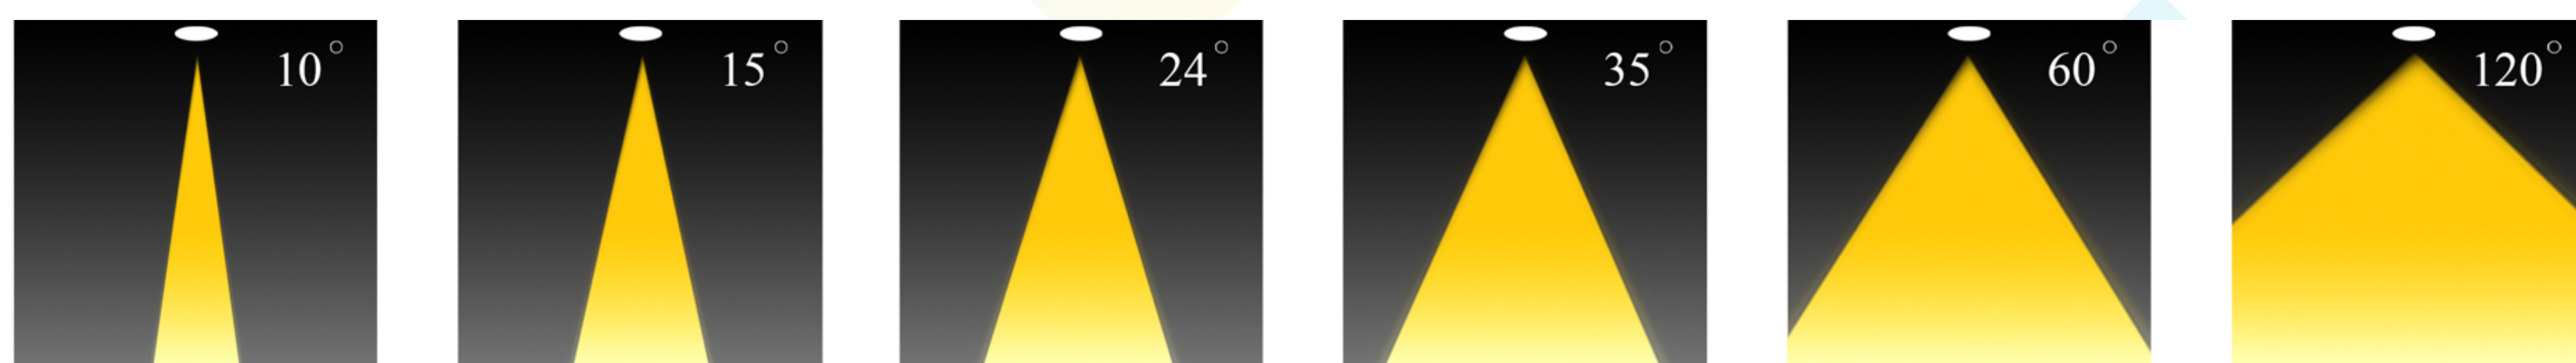

Code	Power W/m	Efficacy Lm/m	Colour Temp. K	Length WxL(Reel) mm	Driver	LED Chip	Weight
STRLEDXXXXW/M1P20	5 10	100	3000 4000	10×5000 mm	Meanwell	Osram	



CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

