

# Up & Down

UD02



## PERFORMANCE DATA

**Efficacy :** 100 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50,000 hrs

**Optic :** 36°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum and extruded Aluminum

**Mounting :** Wall light, up and down version


**Lens :** Clear Glass

**Finish :** Gray RAL 7016


**Protection Class :** IP 65

**Mechanical resistance :** IK 08

## OPTICS

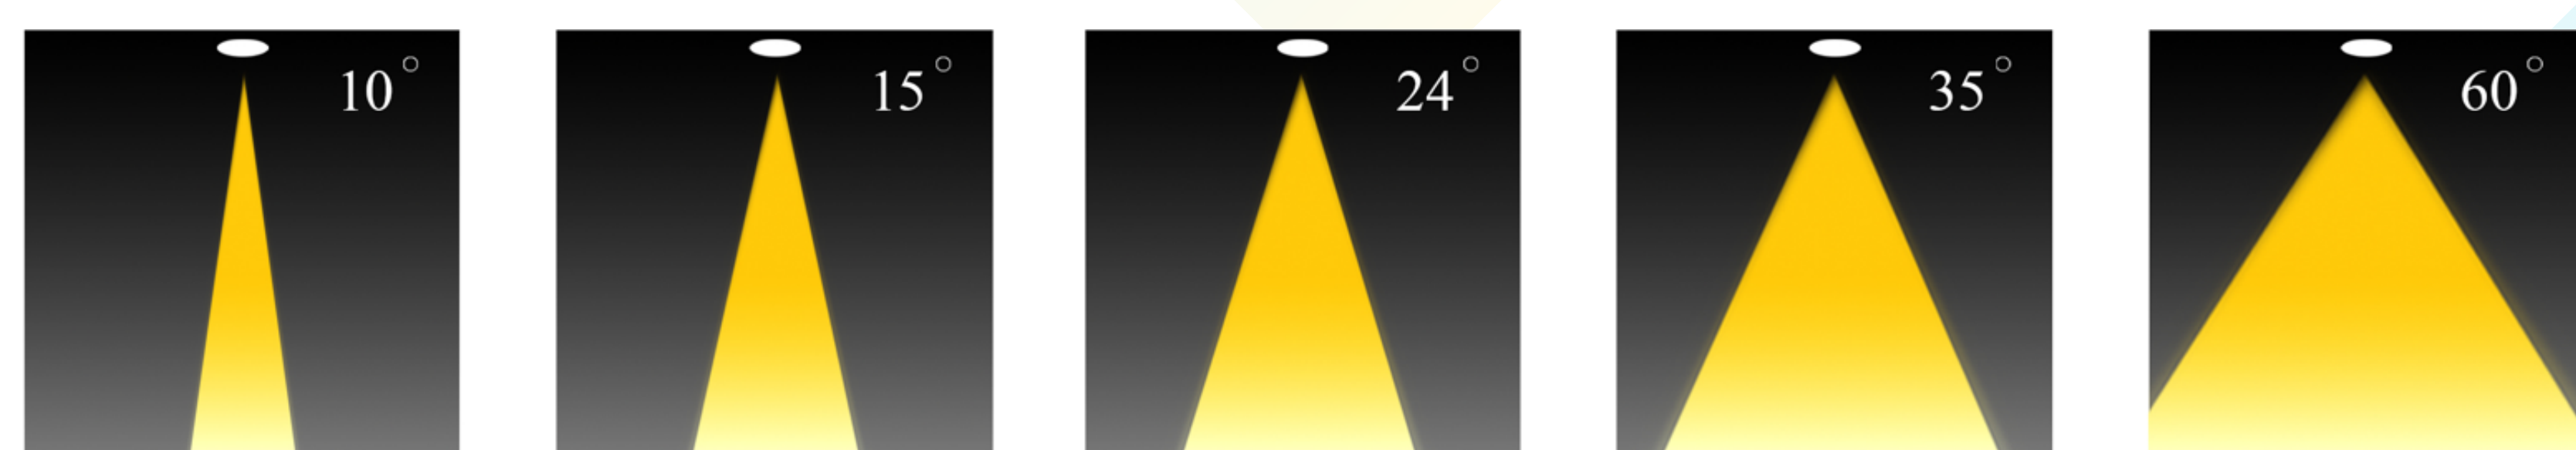

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
UD02230XXXXOTXXX	2*5 2*7	100	3000		Tridonic	Osram	

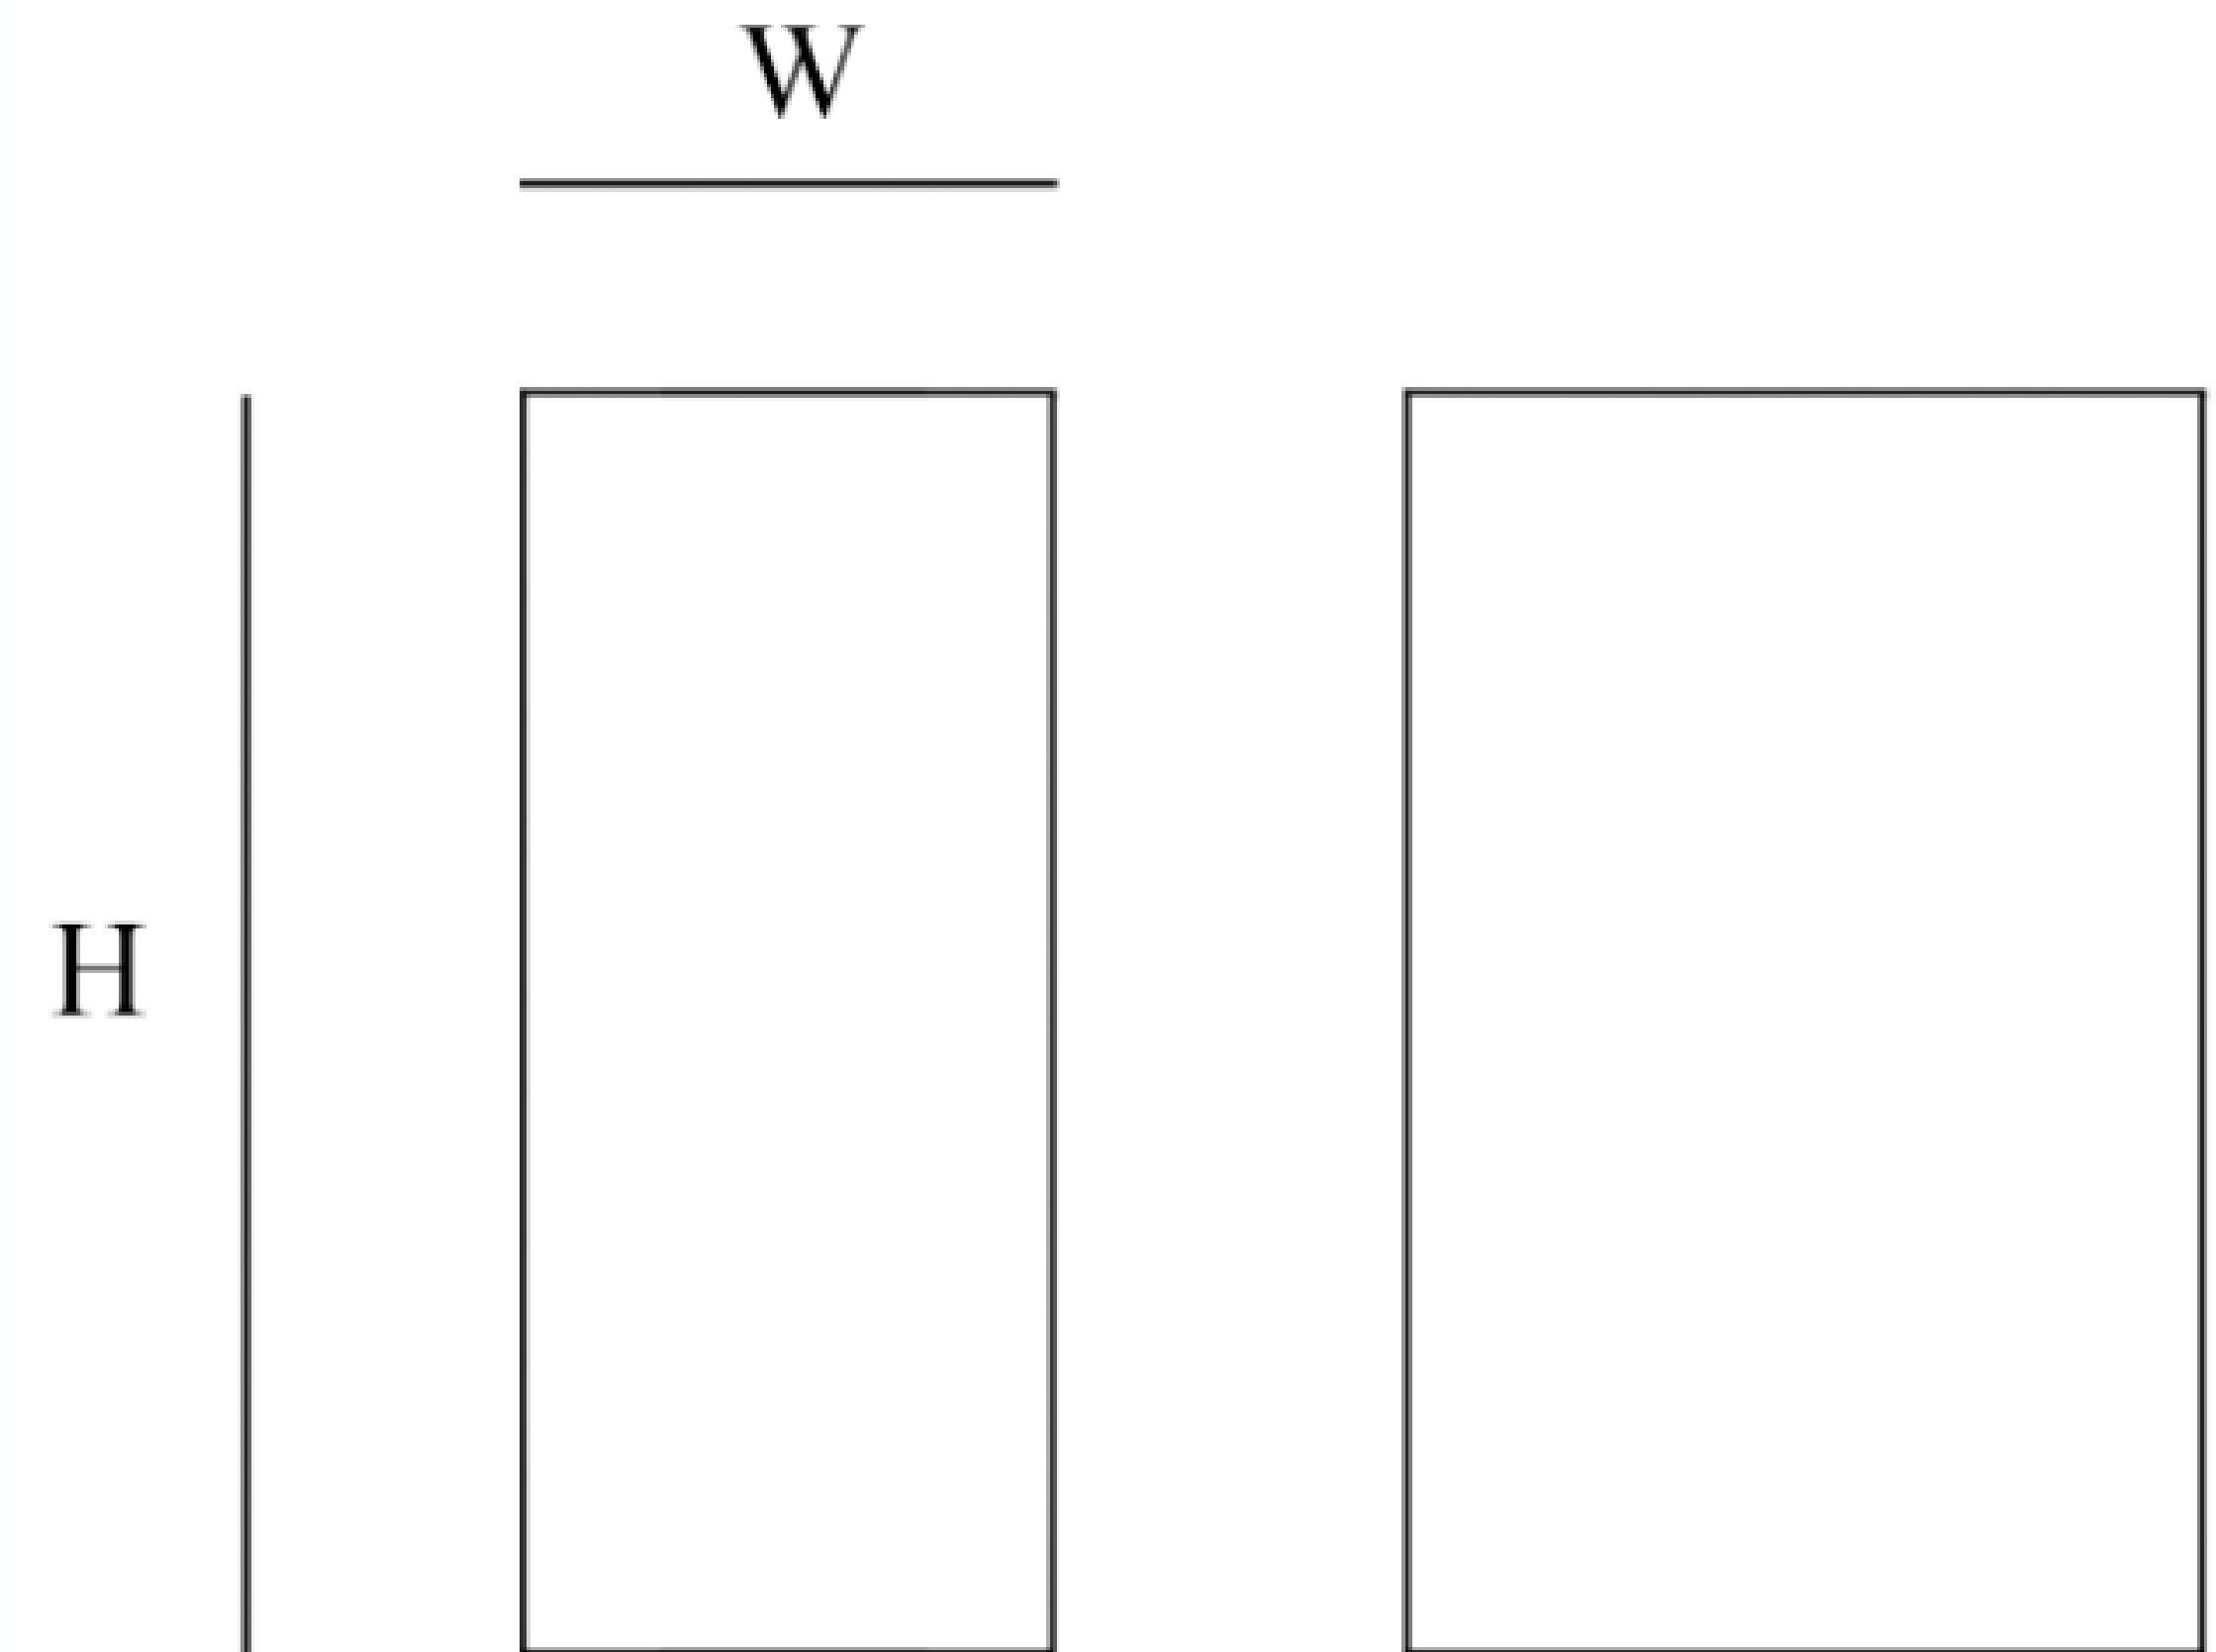

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

