

# Up & Down

UD07



## PERFORMANCE DATA

**Efficacy :** 100 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50,000 hrs

**Beam Angle :** 24°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die-casting Aluminum and extruded Aluminum

**Mounting :** Wall light, up and down version


**Lens :** Clear Glass

**Finish :** Gray RAL 7016

**Protection Class :** IP 65


**Mechanical resistance :** IK 08

## OPTICS

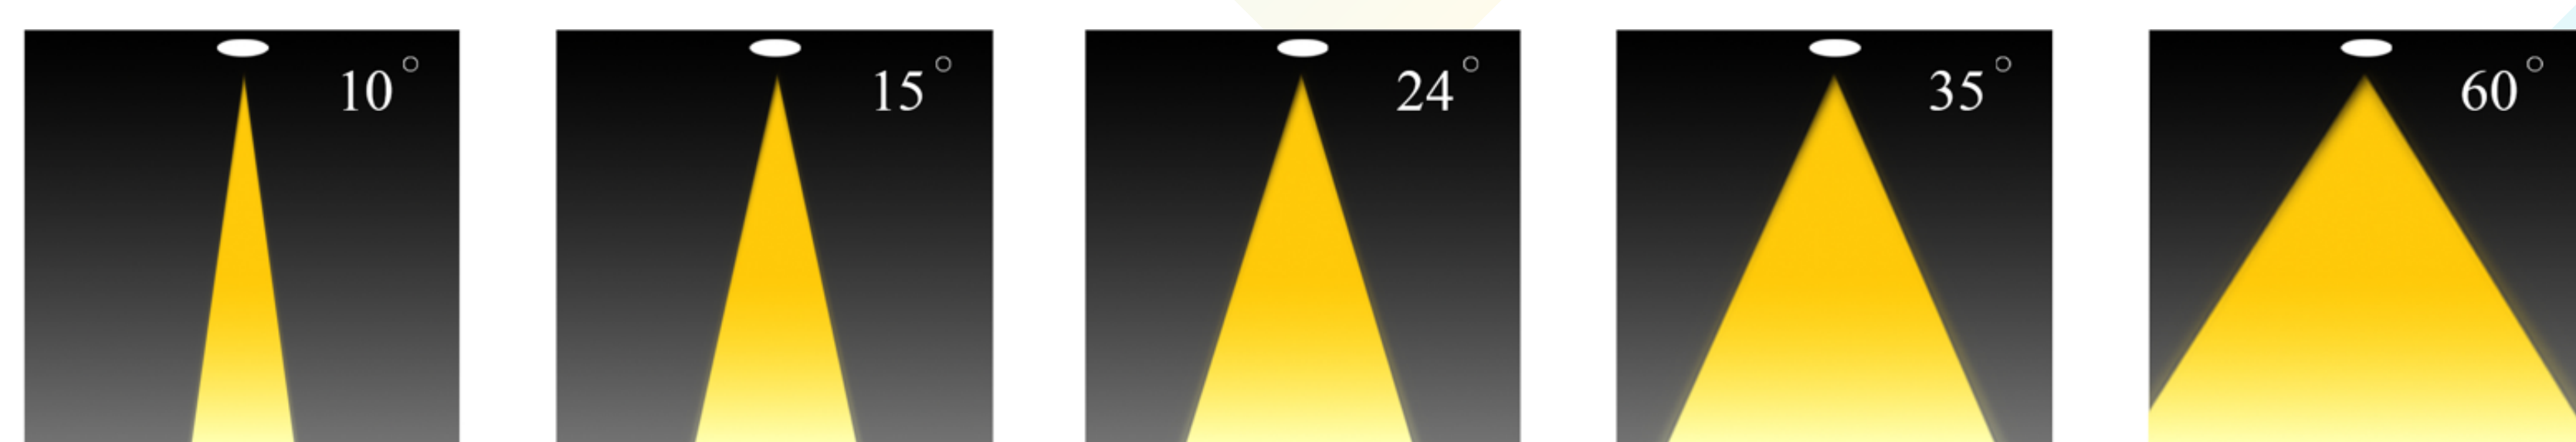



| Code             | Power<br>W | Efficacy<br>Lm/W | Colour Temp.<br>K | Dimensions<br>WxH mm | Driver   | LED Chip | Weight |
|------------------|------------|------------------|-------------------|----------------------|----------|----------|--------|
| UD07230XXXXOTXXX | 2*5<br>2*7 | 100              | 3000              | 90x180 mm            | Tridonic | Osram    |        |

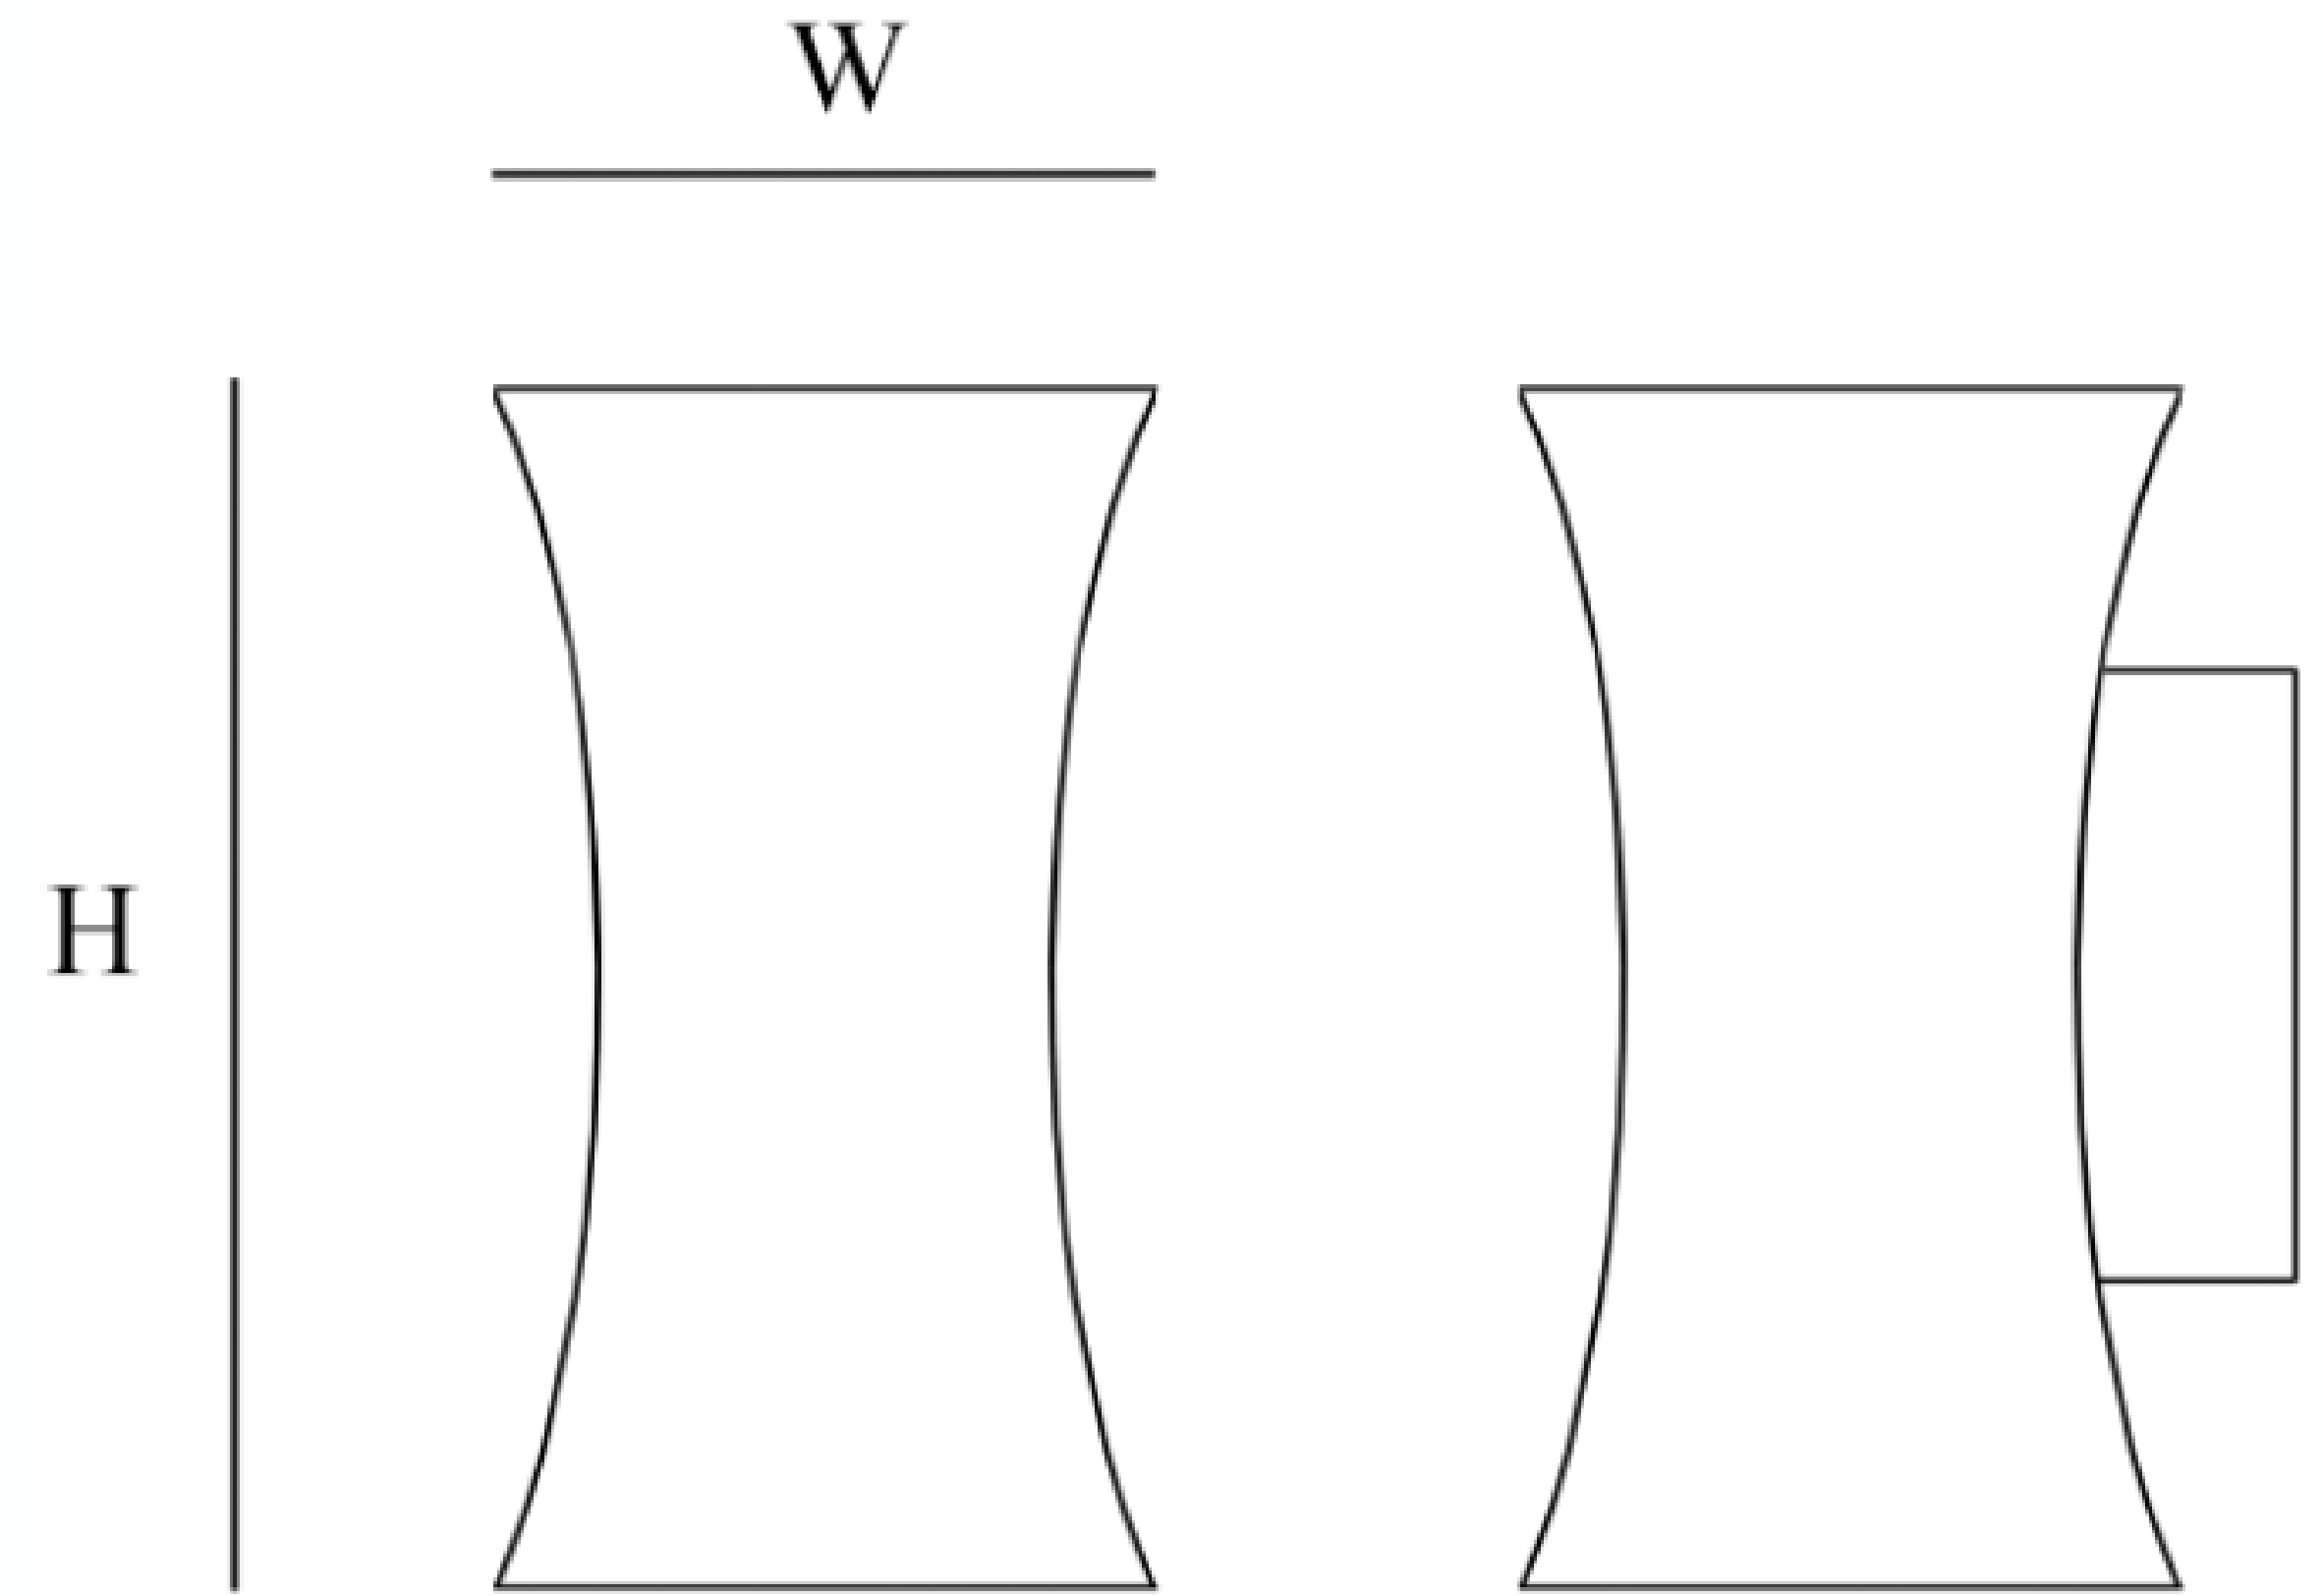

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

