

linear Aluminum profile

SLT-1060



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : suspended,surface

Lens : Polycarbonate







Finish : Black / White

Protection Class : IP 40


Mechanical Resistance : IK 03



OPTICS

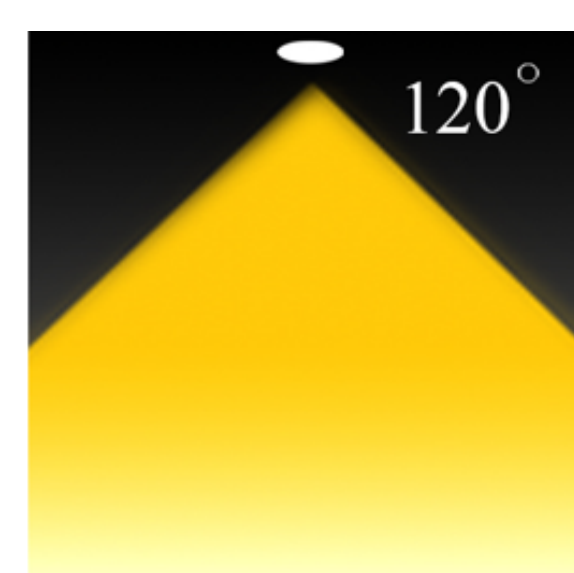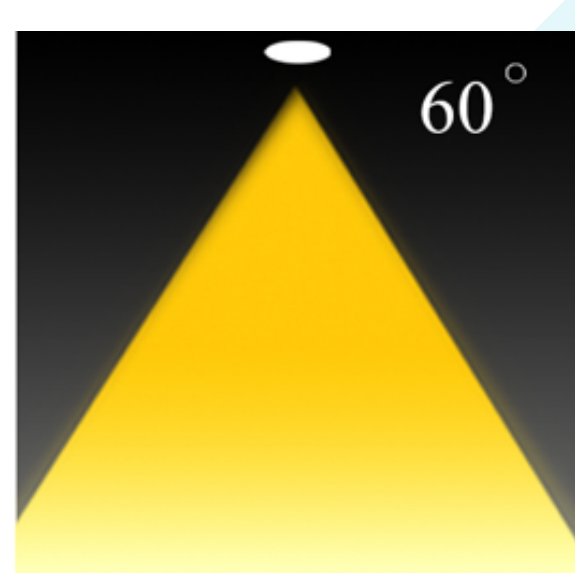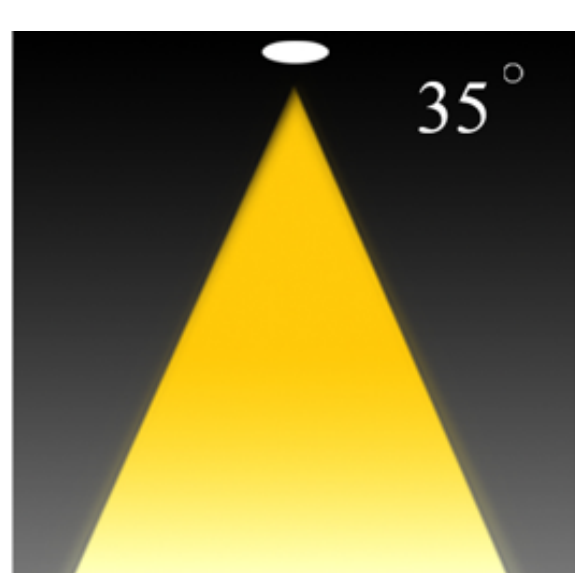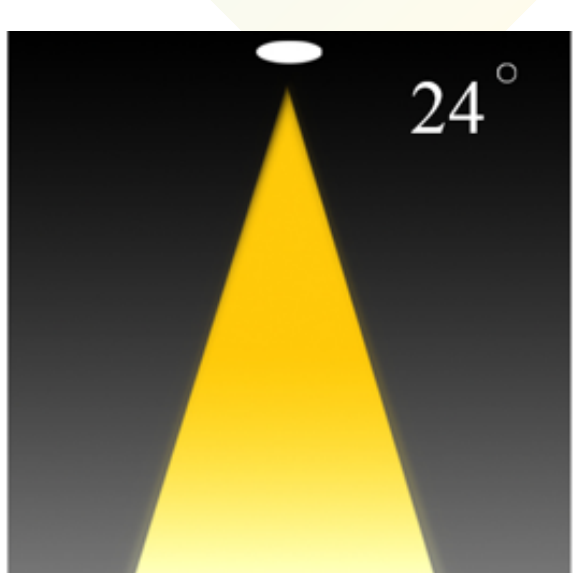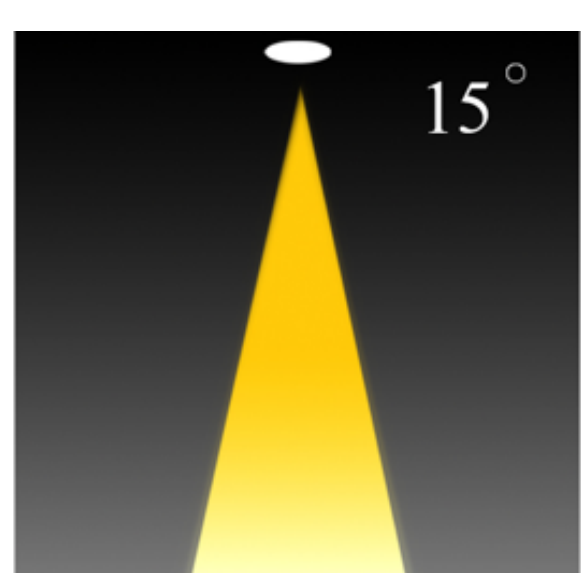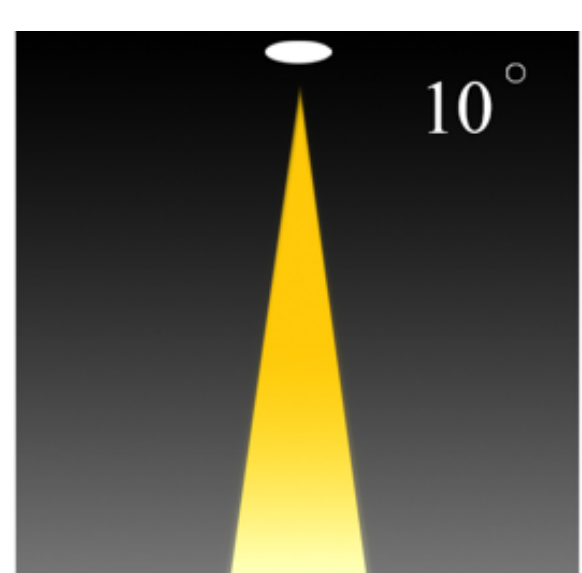

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight
166XXX8120OX024	24	130	3000 4000 6500	600x50x70 mm	Tridonic Done	Osram	

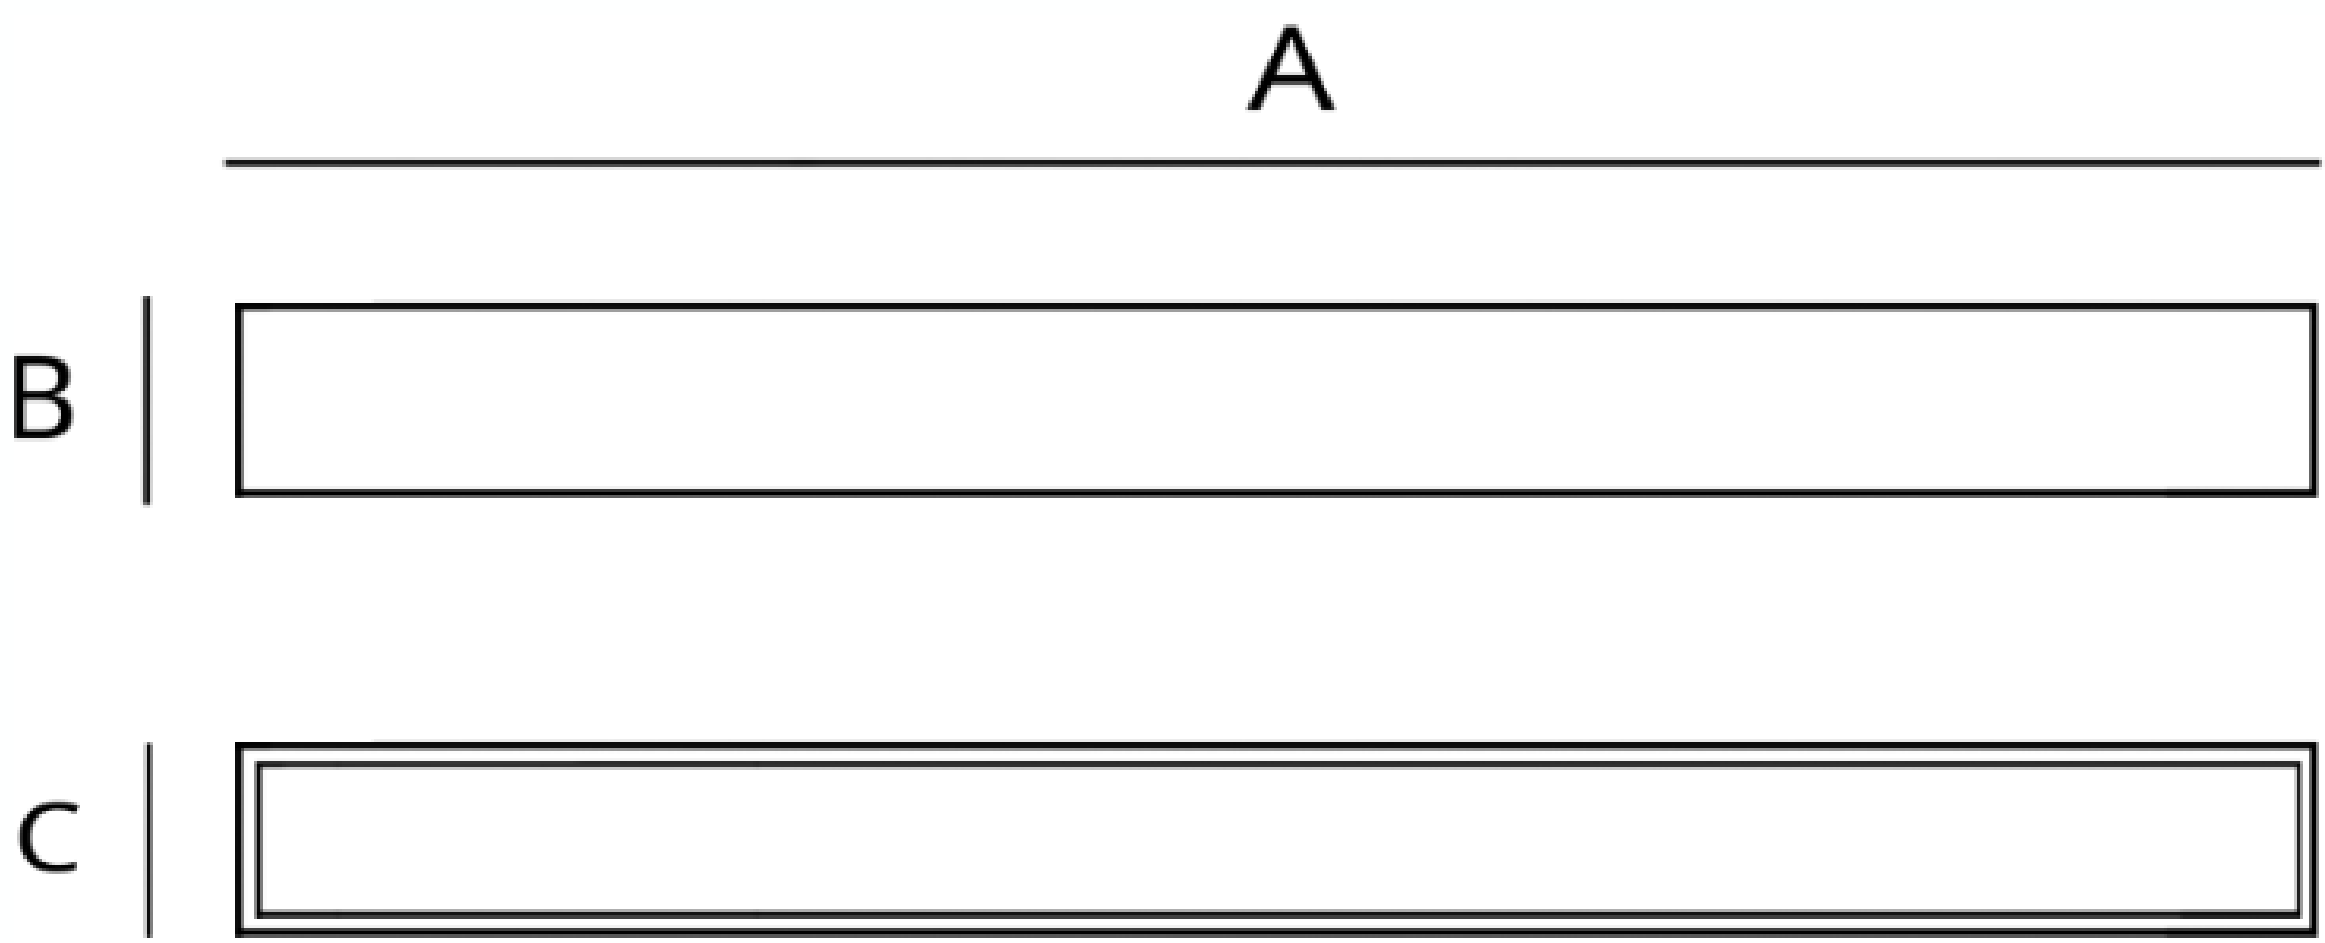

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

FINISH

White Gray

DALI

POLAR CURVE

