

linear Aluminum profile

SLT-1120



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : suspended,surface

Lens : Polycarbonate


Finish : Black

Protection Class : IP 40-54


Mechanical Resistance : IK 03



OPTICS

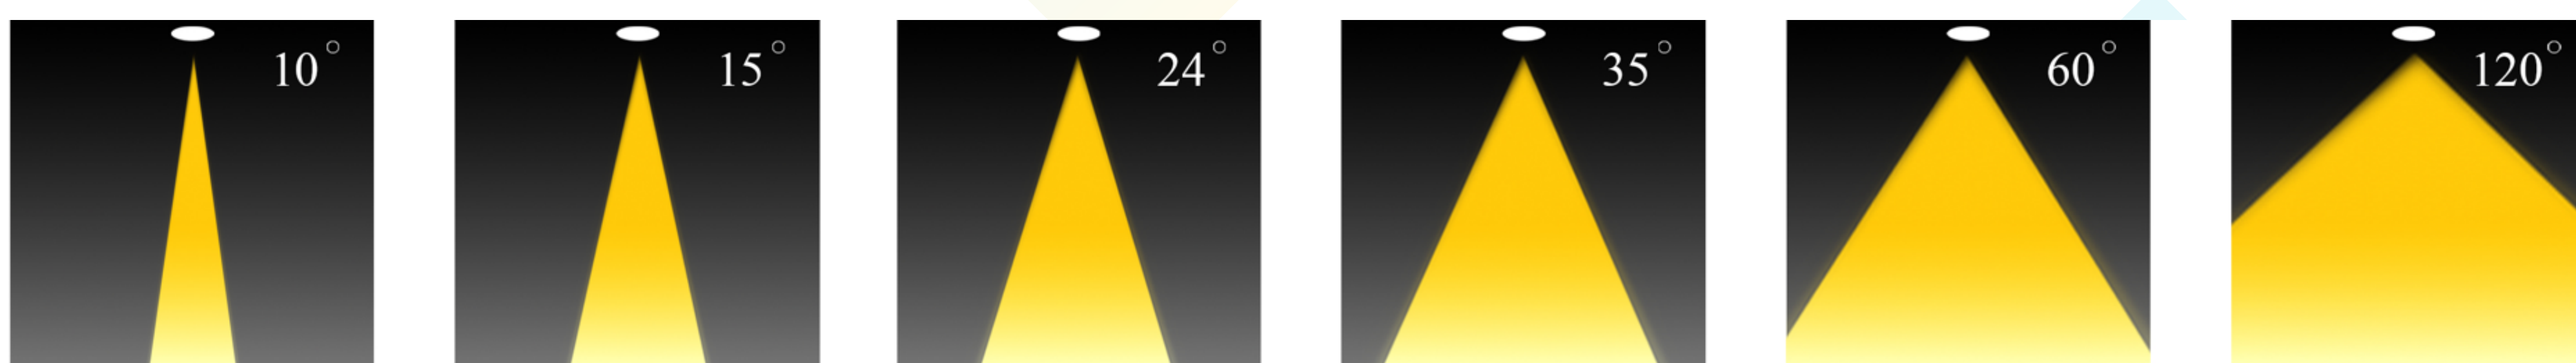

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight
167XXX81200X036	15 36 50	130	3000 4000 6500	1200x50x70 mm	Tridonic Done	Osram	

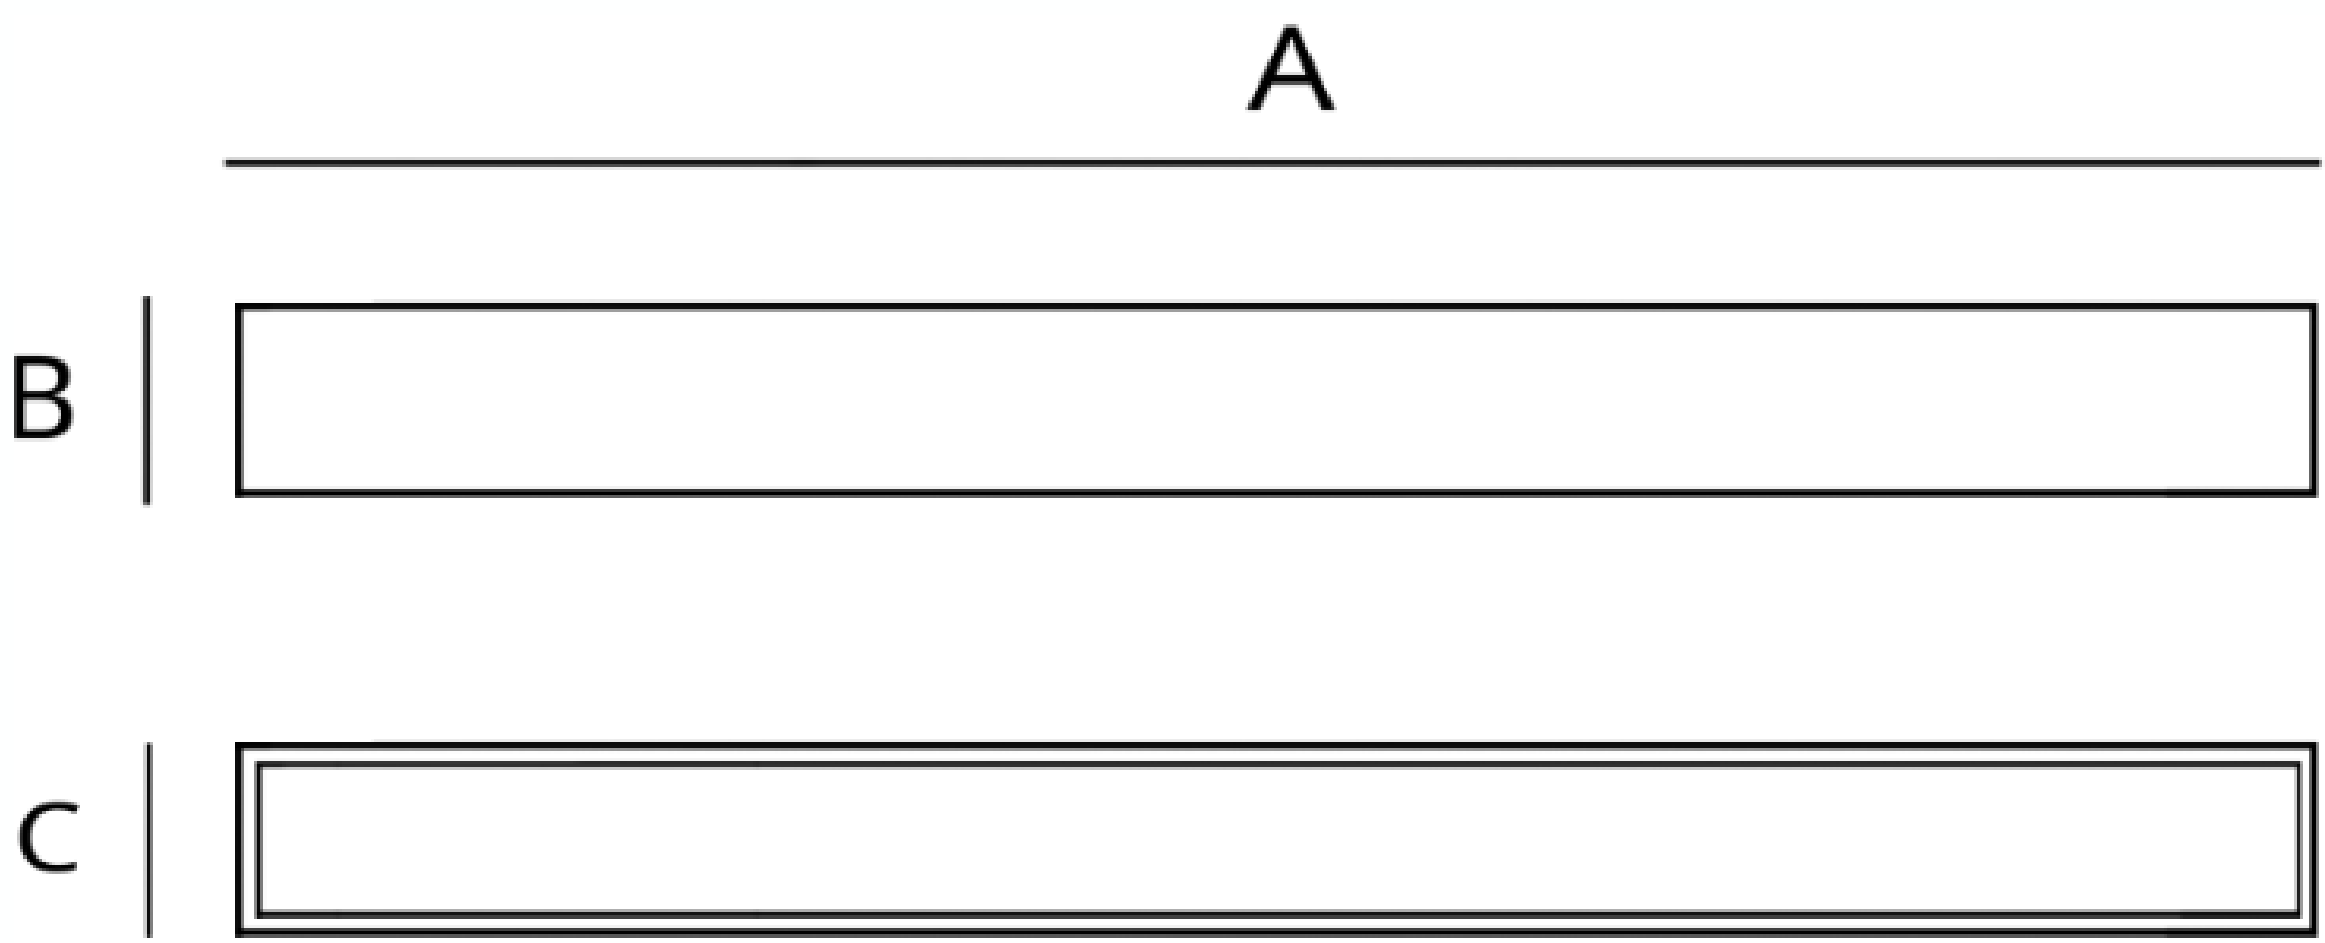

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

FINISH

White Gray

DALI

POLAR CURVE

