


Wall Decortive

SLT-1126

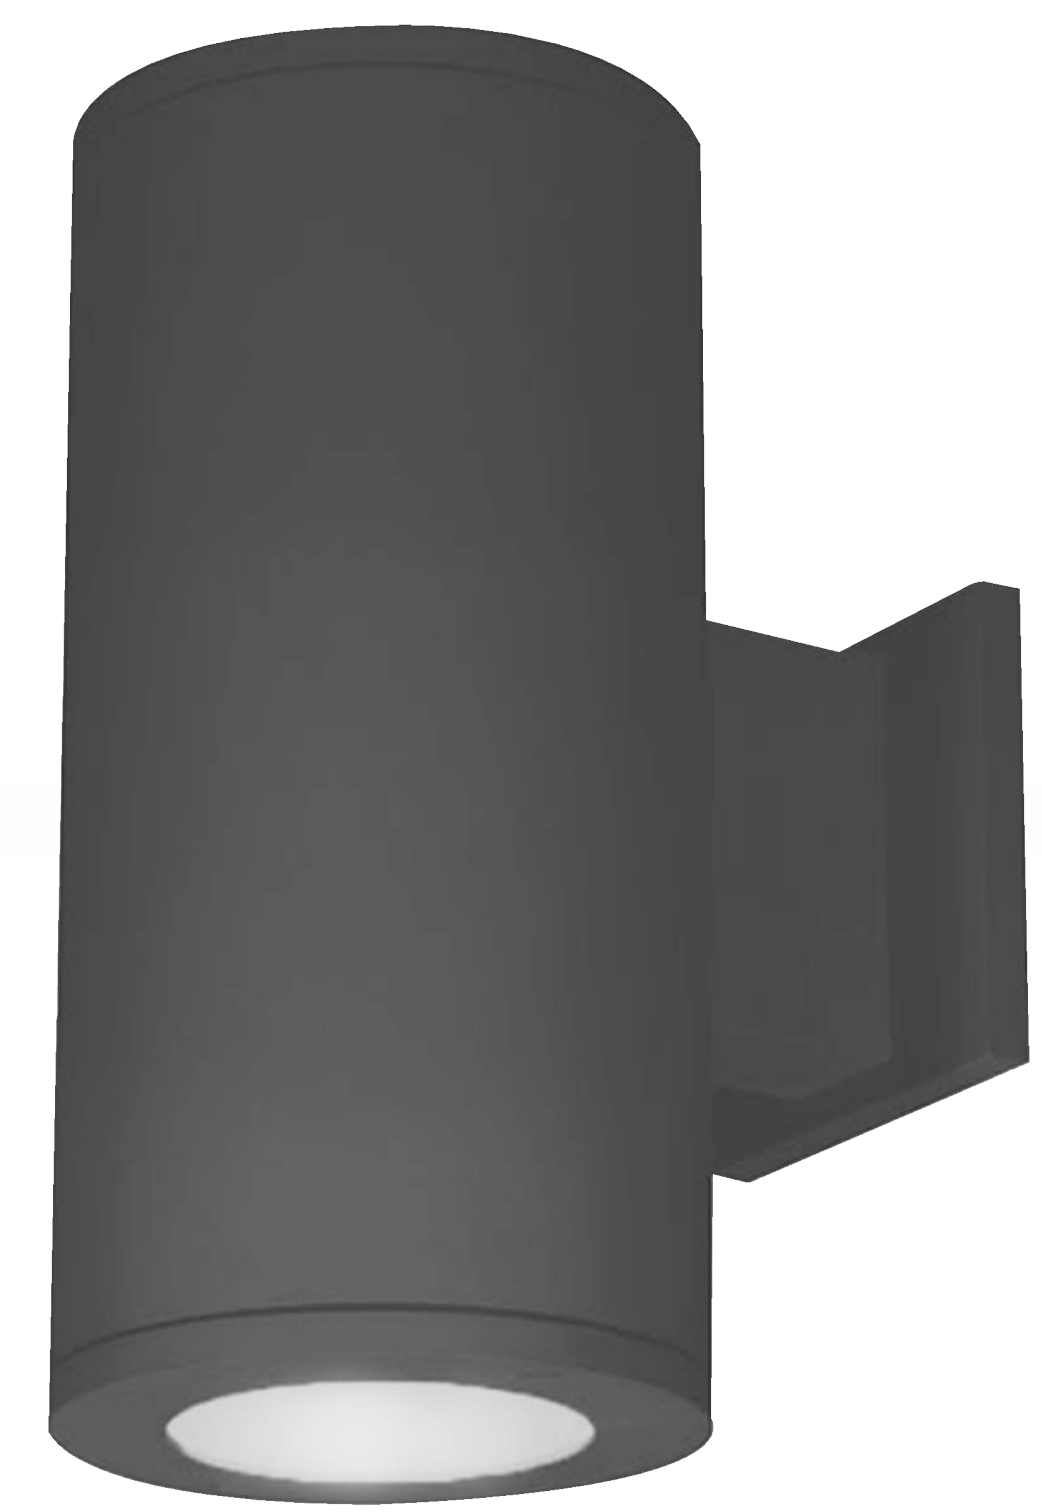

PERFORMANCE DATA

Efficacy : 77.6 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 36°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum body

Mounting : Wall mounted

Lens : Clear glass


Finish : Gray RAL 7016

Protection Class : IP 65



Mechanical resistance : IK 08



OPTICS

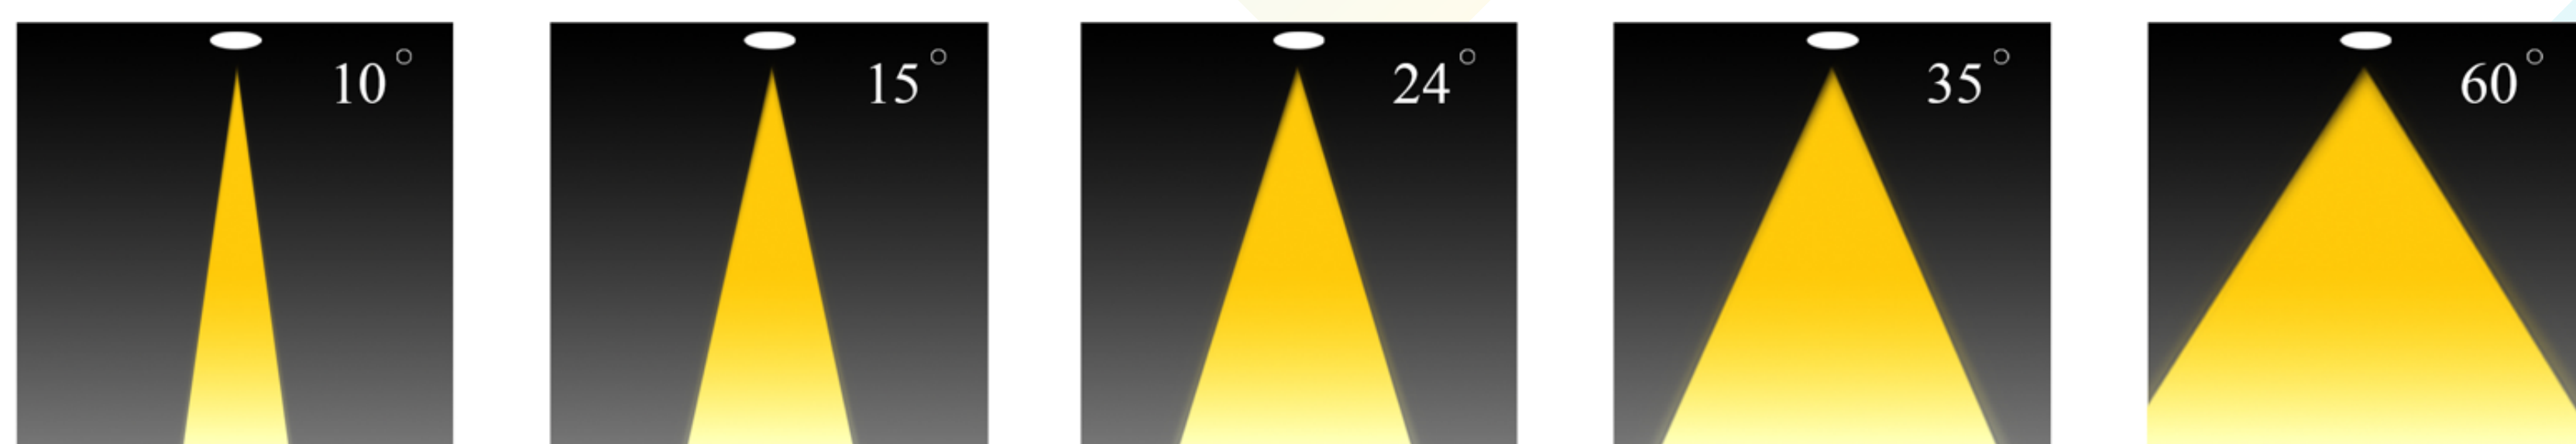

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
1126330X036CD015	15	77.6	3000	120x164.5x218 mm	Done	Cree	1.275

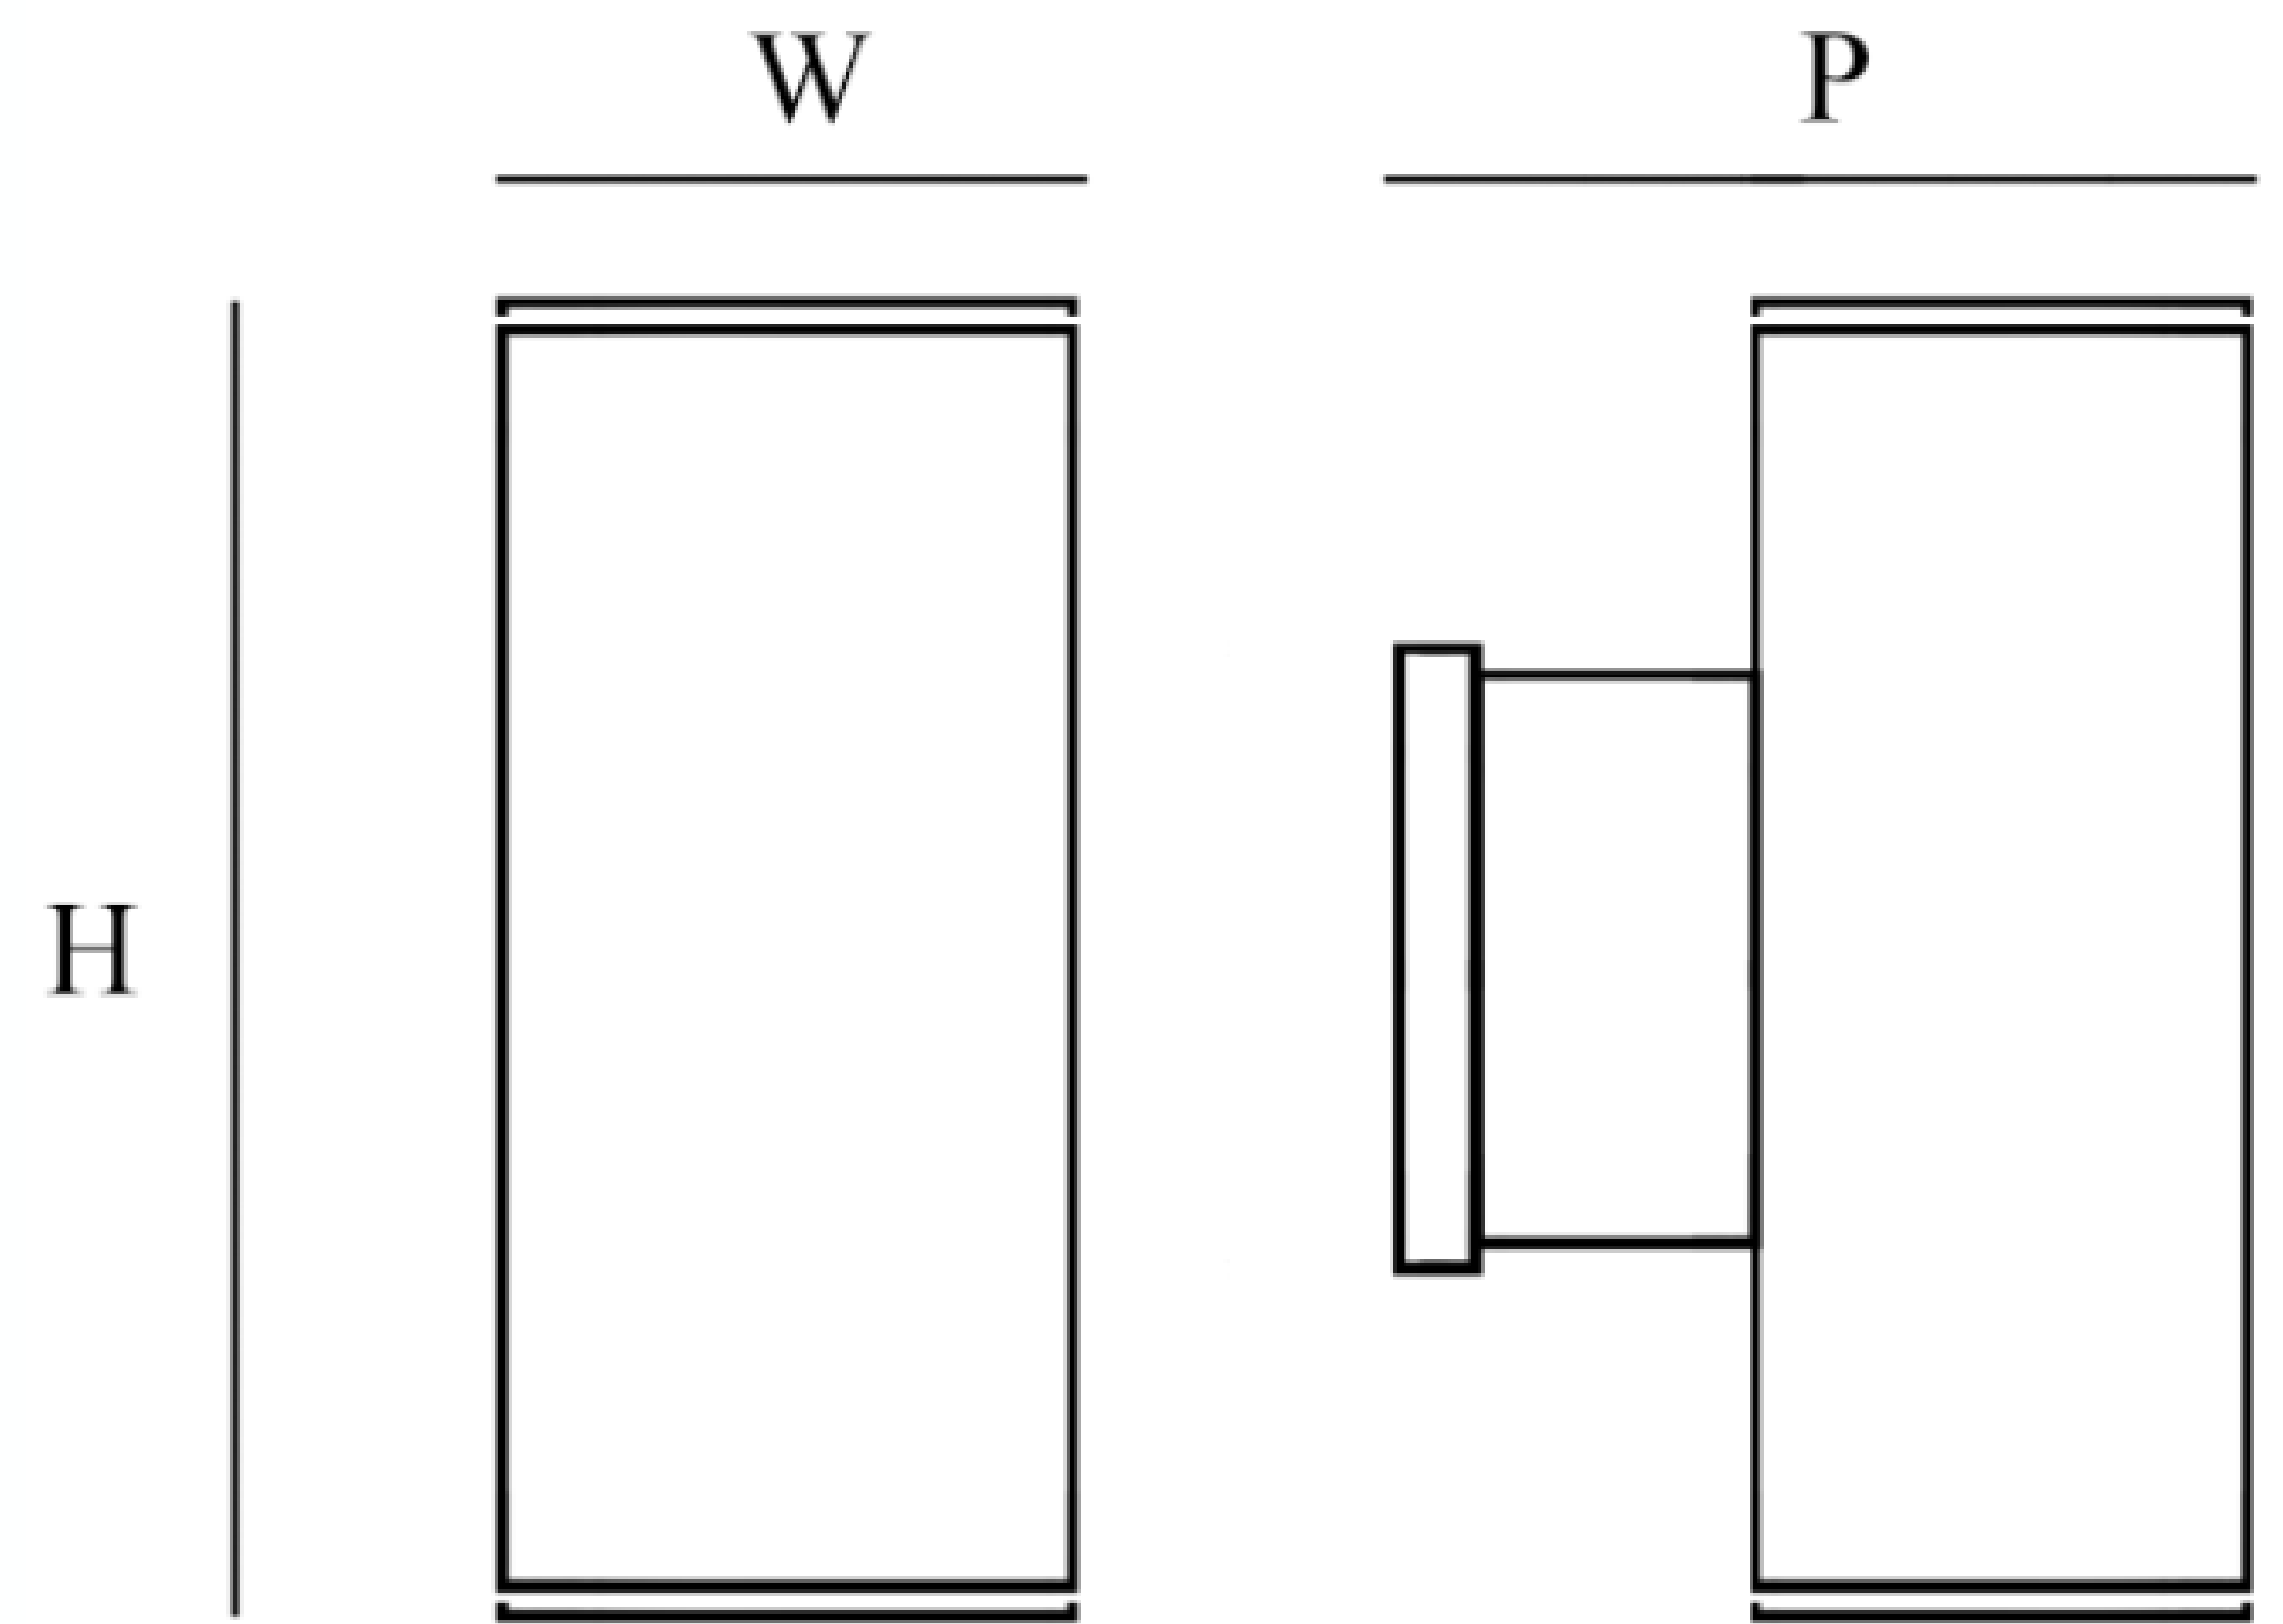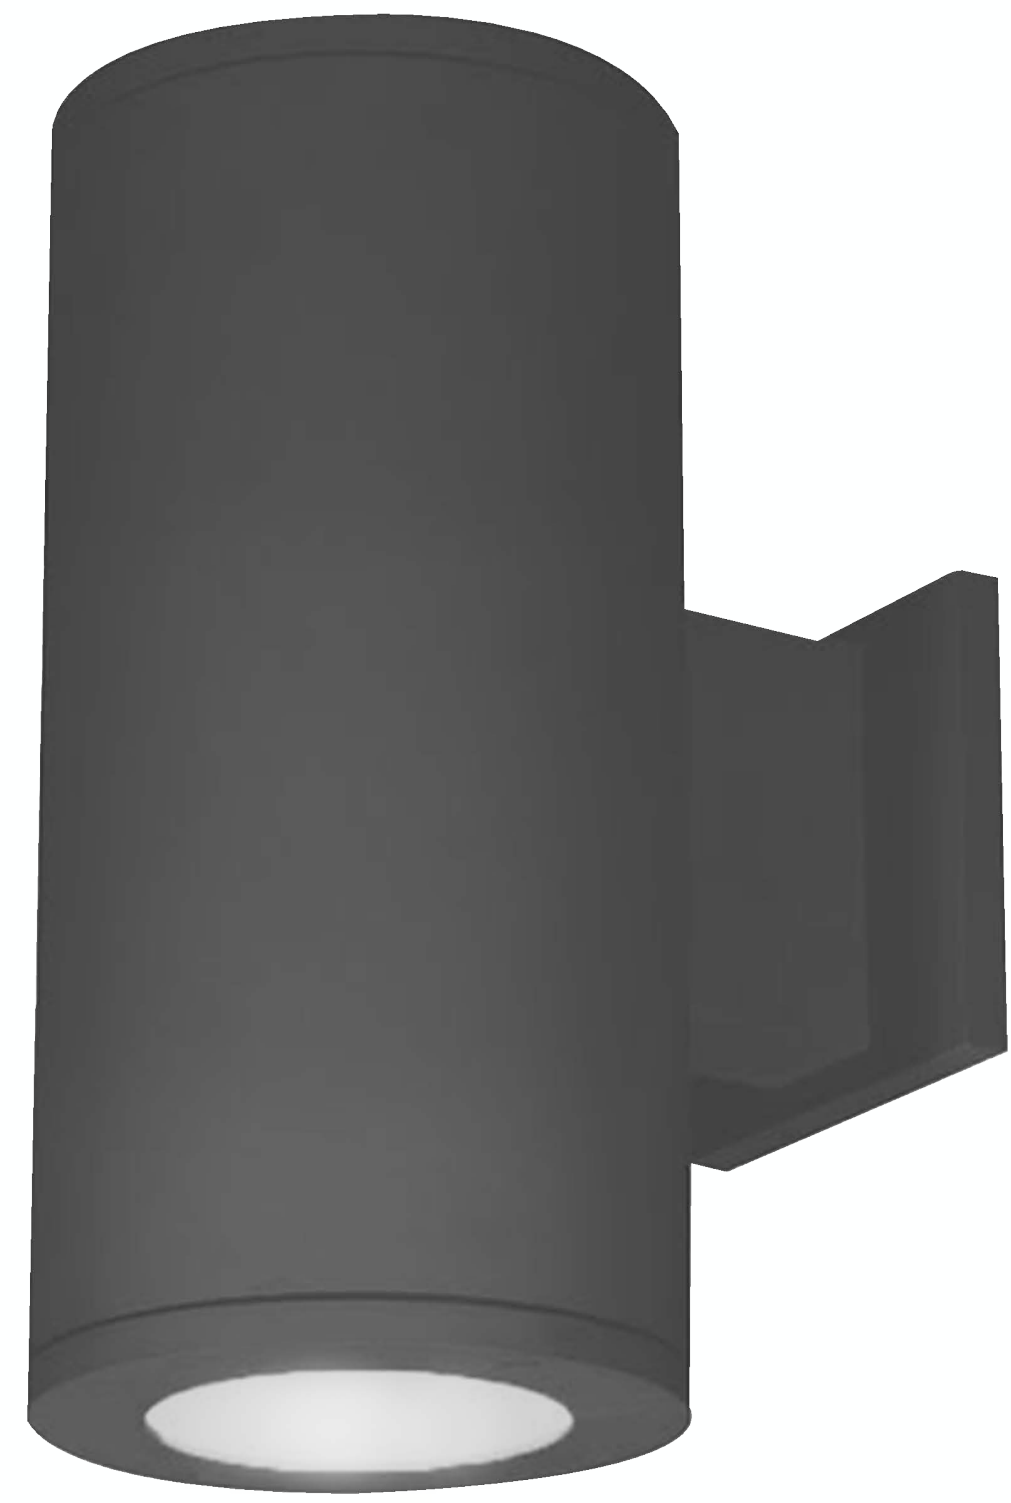

CUSTOMISZE OPTIONS

3K	4K	6.5K	CRI >80	DALI
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

POLAR CURVE

